




Locking Clamp ROV Shackle Van Beest Green Pin® P-5365

Product information

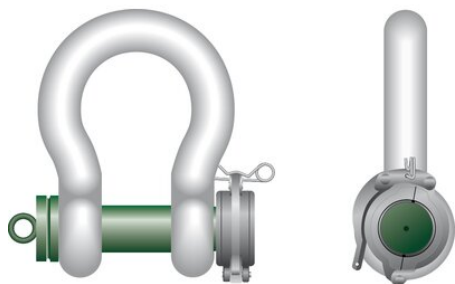

The Green Pin® Locking Clamp ROV Shackle is perfect for release operations with a remotely operated vehicle (ROV). The grade 8 shackle has been specially developed for sub-sea applications and is easy to handle for the ROV pilot. The Green Pin® Locking Clamp ROV Shackle has a powerful locking system which ensures that the load will not be released before you want it to. The white coating of the Green Pin® Locking Clamp ROV Shackle optimizes visibility under water and ensures its long-term durability. The ROV shackle is available in a range with a working load limit from 6.5 up to 250 ton.

Certification on request: 2.1, 2.2, 3.1, MTCa, MTCb, LROS

Safety factor: 6:1 up to WLL 85 ton. 5:1 for 120 ton and up.

[... Read more](#)

Material: Bow and pin alloy steel

Marking: CE-marked

Temperature range: -60°C up to +200°C

Finish: Bow white painted, pin green painted


Note: Supplied without wires; design you own wiring plan

Grade: 8



Locking Clamp ROV Shackle Van Beest Green Pin® P-5365

Blueprint



Technical data

WLL (metric) tonnes	a in	b in	c in	d in	e in	f in	g in	h in	i in	j in	k in	Weight lb
6.5	0.87	0.98	2.05	0.87	1.42	3.27	2.28	6.46	5.51	4.02	1.77	5
9.5	1.1	1.26	2.6	1.1	1.85	4.25	2.95	7.87	6.77	5.16	1.89	9.37
12	1.26	1.38	2.83	1.26	2.01	4.53	3.27	8.39	7.24	5.79	1.89	11.82
17	1.5	1.65	3.46	1.5	2.36	5.75	3.9	10.47	8.23	6.89	1.89	20.44
25	1.77	1.97	4.06	1.77	2.91	7.01	4.96	12.17	9.57	8.5	1.89	32.23
35	1.97	2.24	4.57	1.97	3.27	7.76	5.43	13.78	10.59	9.37	1.89	45.75
42.5	2.24	2.56	5.12	2.24	3.74	8.74	6.3	14.84	11.85	10.79	1.89	62.46
55	2.56	2.76	5.71	2.56	4.13	10.24	7.09	17.32	12.95	12.2	1.89	90.39
85	2.95	3.27	6.38	2.95	5	12.95	7.48	20.75	14.76	13.39	1.89	134.48
120	3.74	3.74	8.19	3.58	5.79	15.75	9.37	25.47	17.32	16.85	2.36	242.51
150	4.13	4.25	9.37	4.02	6.65	16.14	10.83	27.09	19.29	19.09	2.36	352.74
200	4.72	5.12	10.98	4.45	7.05	20.2	11.42	32.99	20.47	20.87	2.36	518.09
250	5.12	5.51	11.77	4.65	8.07	21.81	12.01	35.59	22.05	22.24	2.36	628.32