LAM-É ST-PIERRE | Lifting Solutions Group
Axel Johnson International

Sling Shackle BN Van Beest Green Pin® P-6033

Product information

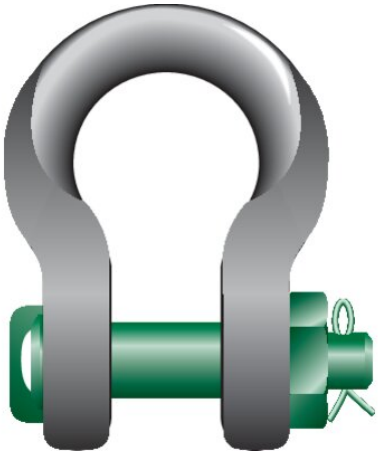

The Green Pin® Sling Shackle BN is a high load capacity bow shackle with a safety bolt and a fixed nut. The Sling Shackle BN is an excellent choice for heavy lifting projects due to the shape of the shackle crown. Compared to the standard Green Pin® Heavy Duty Shackles, Sling Shackles have an increased bow radius to improve your sling's resistance to wear and tear and enable you to use a lighter wire rope to lift the same heavy load. This means that by using the Green Pin® Sling Shackle BN you can save on wire rope costs (however, the Green Pin® Power Sling shackle offers even bigger savings). The shackle also offers a double safety (split pin and safety bolt) which prevents accidental unscrewing of the pin. Of course, galvanization of the Green Pin® Sling Shackle BN ensures long-term durability. A wide range of certifications is also available: Green Pin® Sling Shackles BN of 75 tons and higher include a Lloyd's proofload test certificate for example. The Green Pin® Sling Shackle BN is available in a range with a working load limit from 7 up to 1550 tons.

Certification on request: 2.1, 2.2, 3.1, MTCb, LROS, MPIb, USb

... *Read more*

Material: Bow and pin alloy steel, quenched and tempered
Marking: CE-marked
Temperature range: -20°C up to +200°C
Finish: Shackle bow painted silver, pin painted green (7 up to 55 ton shackles are hot dipped galvanized)

Safety factor: 5:1
Grade: 8

© October 2026 - All Rights Reserved

LAM-É ST-PIERRE | Lifting Solutions Group
Axel Johnson International

Sling Shackle BN Van Beest Green Pin® P-6033

Blueprint



Technical data

Part code	WLL (metric) tonnes	a in	b in	c in	d in	e in	f in	g in	h in	i in	j in	k in	l in	Weight lb
11.34SLGPF0007	7	0.87	0.87	1.81	0.75	1.26	3.78	2.52	6.02	4.53	4.33	0.75	1.61	4.34
11.34SLGPF0012	12.5	1.1	1.1	2.4	0.98	1.73	4.72	3.23	7.76	5.94	5.75	0.94	2.13	9.41
11.34SLGPF0018	18	1.38	1.38	2.72	1.18	2.13	5.83	4.02	9.41	6.73	7.09	1.14	2.52	15.1
11.34SLGPF0030	30	1.57	1.65	3.54	1.38	2.72	6.5	4.96	10.98	8.15	7.87	1.34	3.11	27.56
11.34SLGPF0040	40	2.17	2.01	4.29	1.77	3.31	7.83	5.51	13.03	9.92	9.25	1.5	3.82	44.75
11.34SLGPF0055	55	2.36	2.24	4.53	2.17	3.54	9.45	6.3	15.31	11.57	10.63	1.77	3.94	67.02
11.34SLGPF0075	75	2.68	2.76	4.96	2.13	4.33	11.42	7.28	18.62	12.48	13.03	1.57	4.72	108.03
11.34SLGPF0125	125	3.35	3.15	6.14	3.35	5.39	14.41	8.66	22.95	16.26	15.35	1.57	5.91	209.44
11.34SLGPF0150	150	3.7	3.74	7.13	3.5	5.79	15.39	9.96	25.51	17.52	17.68	1.97	6.69	275.58
11.34SLGPF0200	200	4.33	4.13	7.91	3.94	6.22	18.94	11.02	29.88	18.9	19.69	1.97	8.07	418.88
11.34SLGPF0250	250	4.96	4.72	9.02	4.33	7.05	21.34	11.81	33.86	21.06	21.73	2.36	9.45	582.02
11.34SLGPF0300	300	5.35	5.28	9.69	5.28	7.68	23.66	13.78	37.24	23.23	24.41	2.76	10.43	793.66
11.34SLGPF0400	400	6.3	6.3	11.61	5.71	9.09	22.68	14.57	39.17	27.05	27.95	3.15	12.6	1,285.3
11.34SLGPF0500	500	6.69	7.09	12.99	6.3	10.35	26.81	17.72	45.71	30	33.46	3.54	13.39	1,900.39
11.34SLGPF0600	600	7.48	7.87	14.17	6.69	11.38	29.17	19.29	49.76	32.56	36.61	3.94	14.57	2,500.04
11.34SLGPF0700	700	7.87	8.46	15.43	7.48	12.4	29.57	21.26	50.55	34.61	35.47	3.94	15.75	2,998.29
11.34SLGPF0800	800	8.58	9.06	16.54	7.87	13.46	33.5	21.81	56.14	37.09	37.28	4.33	16.54	3,703.77
11.34SLGPF0900	900	9.53	10.04	18.35	8.66	14.49	33.5	22.83	58.58	40.28	40.28	4.72	17.32	3,637.63
11.34SLGPF1000	1,000	10.24	10.63	19.29	9.45	15.71	33.5	24.17	60.31	43.43	43.58	4.72	18.11	6,547.73
11.34SLGPF1250	1,250	11.22	11.81	20.08	10.24	17.8	36.65	25.59	65.59	48.31	46.54	5.91	20.87	8,157.11
11.34SLGPF1550	1,550	11.22	12.6	21.65	11.02	19.02	37.4	26.77	67.32	51.18	49.33	5.91	22.05	8,818.5

© October 2026 - All Rights Reserved