




Eye Hook Crosby S-1316, Type SHUR-LOC

Product information

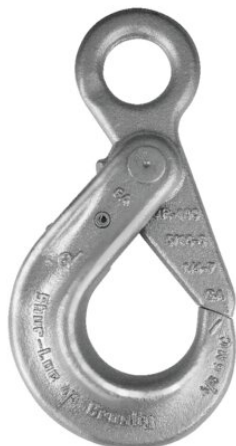

- 25% stronger than Grade 80
- Individually Proof tested to 2-1/2 times the Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
- Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Eye style is designed with "Engineered Flat" to connect to S-1325 chain coupler.
- Suitable for use with Grade 100 and Grade 80 chain.
- The SHUR-LOCK hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926. 1431 (g) (1)(i)(A) and 1926. 1501(g)(4)(iv)(B).
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles [... Read more](#)

Material: Forged Alloy steel - Quenched and Tempered.

Warning: Not to be heat-treated.


Safety factor: 4:1

Grade: 10



Eye Hook Crosby S-1316, Type SHUR-LOC

Blueprint



Technical data

Part code	Chain diameter mm	WLL (metric) tonnes	A in	C in	D in	E in	F in	H in	J in	L in	AA in	Weight lb
11.161022896	6	1.45	0.78	3.94	0.79	2.6	0.67	0.31	0.63	1.16	1.5	0.86
11.161022914	7-8	2.6	1.08	5.31	1.1	3.5	0.87	0.39	0.81	1.48	2.01	1.81
11.161022923	10	4	1.3	6.57	1.17	4.41	1.1	0.51	0.94	1.83	2.5	3.4
11.161022932	13	6.8	1.65	8.23	1.67	5.47	1.26	0.67	1.16	2.22	3	6
11.161022941	16	10.3	2.2	10.08	2.04	6.57	1.5	0.87	1.5	2.65	3.5	15.06
11.161022942	18-20	16	2.52	10.79	2.22	7.76	2.01	0.87	2.03	3.52	-	18.98
11.161022943	22	20	2.87	12.48	2.45	8.74	2.27	0.98	2.2	3.83	-	28
11.161022944	26	27.1	3.15	14.61	3.21	9.88	2.46	1.26	2.68	4.09	-	49.49