



**LAM-É  
ST-PIERRE**

**Lifting Solutions Group**  
Axel Johnson International

## **Steel Wire Rope 6x36WS-IWRC**

---




## Steel Wire Rope 6x36WS-IWRC

### Product information



Galvanized steel cable construction 6x36ws + steel core for general use. Available in cross-laid right or left-handed.

... [Read more](#)

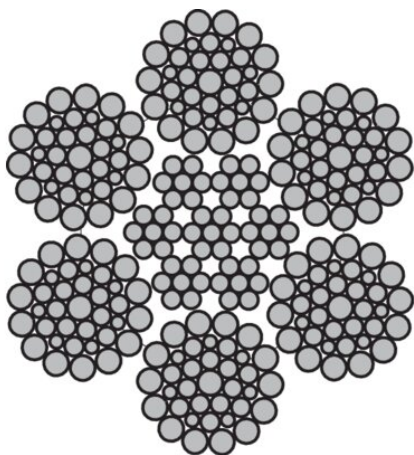

**Rope construction:** 6x36WS-IWRC.

**Material:** Steel

**Marking:** According to standard

**Standard:** EN 12385-4

**Fill factor:** 0.59

**RCN:** 09

Slings




Winch rope



Stay rope



Overhead cranes



Tower crane



Container crane



Mobile port crane



Offshore crane



Loading crane



Crawler crane



Piling crane





## Steel Wire Rope 6x36WS-IWRC

### Technical data

Part code	Rope diameter	Rope diameter inch	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
-	6.4	1/4	1,960	Bright	sZ	30.25	-	A-2	-
-	7.9	5/16	1,960	Bright	sZ	46.88	-	A-2	-
-	9.5	3/8	1,960	Galvanized	sZ	67.17	-	Dry	-
-	12.7	1/2	1,960	Bright	sZ	118.32	-	A-2	-
-	12.7	1/2	1,960	Galvanized	sZ	118.32	-	Dry	-
-	14.3	9/16	1,960	Bright	zS	149.46	-	A-2	-
-	14.3	9/16	1,960	Galvanized	sZ	710.83	-	Dry	-
-	15.9	5/8	1,960	Bright	sZ	183.27	-	A-2	-
-	15.9	5/8	1,960	Galvanized	sZ	183.27	-	Dry	-
-	19	3/4	1,960	Bright	sZ	261.56	-	A-2	-
-	19	3/4	1,960	Galvanized	sZ	261.56	-	Dry	-
-	22.2	7/8	1,960	Bright	sZ	354.08	-	A-2	-
-	22.2	7/8	1,960	Galvanized	sZ	354.08	-	Dry	-
-	28.6	1-1/8	1,960	Galvanized	sZ	520.44	-	Dry	-
-	31.7	1-1/4	1,960	Galvanized	sZ	1,014.19	-	Dry	-
-	38.1	1-1/2	1,960	Bright	sZ	1,014.19	-	A-2	-
-	44.4	1-3/4	1,960	Bright	sZ	1,361.16	-	A-2	-