




LAM-É  
ST-PIERRE

Lifting Solutions Group  
Axel Johnson International

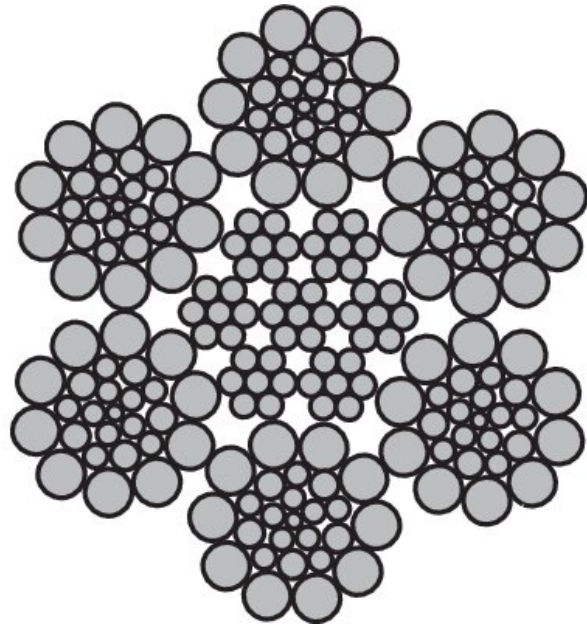

## Steel Wire Rope 6x26-IWRC

### Product information



**Typical applications:** Winches, cranes.

**ISO 4309 Rope Category No:** All Diameters RCN.06

**Rope construction:** 6x26-IWRC

**Marking:** According to standard

**Finish:** Bright.

**Standard:** EN 12385-4

**Fill factor:** 0.58

**RCN:** 06

Part code	Rope diameter mm	Rope diameter inch	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
-	6.4	1/4	1,960	Bright	sZ	30.24	-	A-2	-
-	11.1	7/16	1,960	Galvanized	sZ	81.66	-	Dry	-
-	12.7	1/2	1,960	Bright	sZ	118.32	-	A-2	-
-	15.9	5/8	1,960	Bright	sZ	183.26	-	A-2	-
-	19	3/4	1,960	Galvanized	sZ	235.75	-	Dry	-
-	19	3/4	1,960	Bright	sZ	261.55	-	A-2	-
-	22.2	7/8	1,960	Bright	sZ	354.07	-	A-2	-
-	25.4	1	1,960	Bright	sZ	459.94	-	A-2	-
101104134070329	41.3	-	1,960	Bright	sZ	145	-	SupplierStandard	790