




Verope Steel Wire Rope Veropro 8

Product information

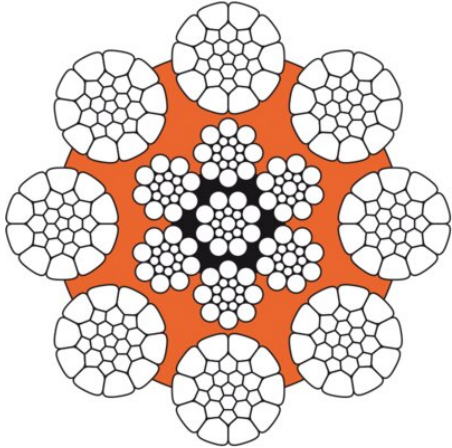

Wire rope construction: veropro 8 is a 8-strand, non rotation-resistant rope with compacted outer strands and a rope core covered with a plastic layer.

Features:


- Very high breaking strength.
- Very stabile rope construction with very good fatigue properties.
- A plastic layer between inner and outer strands prevents inner wear and protects the core from corrosion.
- Very high resistance against flattening and wear.
- Specially suitable for multilayer spooling (Lang Lay).

ISO 4309

Rope Category No: Up to 42mm **RCN.09**, 43-48mm **RCN.11**, > 48mm **RCN.13** ... [Read more](#)

Marking: According to standard
Standard: EN 12385-4
Warning: veropro 8 may not be used with a swivel.

Fill factor: 0.666
RCN: 09
Tolerance Ø: +2% to +4%

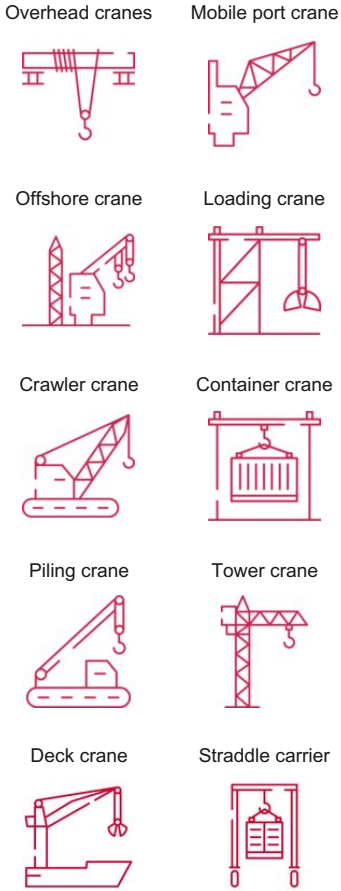



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G18VP8080E	8	1,770	Galvanized	zZ	52.1	33	SupplierStandard	0.63
01.G23VP8080E	8	1,770	Galvanized	zS	52.1	33	SupplierStandard	0.63
01.G13VP8080E	8	1,770	Galvanized	sZ	52.1	33	SupplierStandard	0.63
01.G28VP8080E	8	1,770	Galvanized	sS	52.1	33	SupplierStandard	0.63
01.B18VP8080E	8	1,770	Bright	zZ	52.1	33	SupplierStandard	0.63
01.B23VP8080E	8	1,770	Bright	zS	52.1	33	SupplierStandard	0.63
01.B13VP8080E	8	1,770	Bright	sZ	52.1	33	SupplierStandard	0.63
01.B28VP8080E	8	1,770	Bright	sS	52.1	33	SupplierStandard	0.63
01.G18VP8080G	8	1,960	Galvanized	zZ	57.7	33	SupplierStandard	0.63
01.G23VP8080G	8	1,960	Galvanized	zS	57.7	33	SupplierStandard	0.63
01.G13VP8080G	8	1,960	Galvanized	sZ	57.7	33	SupplierStandard	0.63
01.G28VP8080G	8	1,960	Galvanized	sS	57.7	33	SupplierStandard	0.63
01.B18VP8080G	8	1,960	Bright	zZ	57.7	33	SupplierStandard	0.63
01.B23VP8080G	8	1,960	Bright	zS	57.7	33	SupplierStandard	0.63
01.B13VP8080G	8	1,960	Bright	sZ	57.7	33	SupplierStandard	0.63
01.B28VP8080G	8	1,960	Bright	sS	57.7	33	SupplierStandard	0.63
01.G18VP8080H	8	2,160	Galvanized	zZ	60.6	33	SupplierStandard	0.63
01.G23VP8080H	8	2,160	Galvanized	zS	60.6	33	SupplierStandard	0.63
01.G13VP8080H	8	2,160	Galvanized	sZ	60.6	33	SupplierStandard	0.63
01.G28VP8080H	8	2,160	Galvanized	sS	60.6	33	SupplierStandard	0.63
01.B18VP8080H	8	2,160	Bright	zZ	60.6	33	SupplierStandard	0.63
01.B23VP8080H	8	2,160	Bright	zS	60.6	33	SupplierStandard	0.63
01.B13VP8080H	8	2,160	Bright	sZ	60.6	33	SupplierStandard	0.63
01.B28VP8080H	8	2,160	Bright	sS	60.6	33	SupplierStandard	0.63
-	8.5	1,960	Galvanized	sZ	65.1	37.8	SupplierStandard	0.72
-	8.5	1,960	Galvanized	zS	65.1	37.8	SupplierStandard	0.72
01.G13VP8090E	9	1,770	Galvanized	sZ	66	42	SupplierStandard	0.78
01.G18VP8090E	9	1,770	Galvanized	zZ	66	42	SupplierStandard	0.8
01.G23VP8090E	9	1,770	Galvanized	zS	66	42	SupplierStandard	0.8
01.G28VP8090E	9	1,770	Galvanized	sS	66	42	SupplierStandard	0.8
01.B18VP8090E	9	1,770	Bright	zZ	66	42	SupplierStandard	0.8



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B23VP8090E	9	1,770	Bright	zS	66	42	SupplierStandard	0.8
01.B13VP8090E	9	1,770	Bright	sZ	66	42	SupplierStandard	0.8
01.B28VP8090E	9	1,770	Bright	sS	66	42	SupplierStandard	0.8
01.G18VP8090G	9	1,960	Galvanized	zZ	73	42	SupplierStandard	0.8
01.G23VP8090G	9	1,960	Galvanized	zS	73	42	SupplierStandard	0.8
01.G13VP8090G	9	1,960	Galvanized	sZ	73	42	SupplierStandard	0.8
01.G28VP8090G	9	1,960	Galvanized	sS	73	42	SupplierStandard	0.8
01.B18VP8090G	9	1,960	Bright	zZ	73	42	SupplierStandard	0.8
01.B23VP8090G	9	1,960	Bright	zS	73	42	SupplierStandard	0.8
01.B13VP8090G	9	1,960	Bright	sZ	73	42	SupplierStandard	0.8
01.B28VP8090G	9	1,960	Bright	sS	73	42	SupplierStandard	0.8
01.G18VP8090H	9	2,160	Galvanized	zZ	76.7	42	SupplierStandard	0.8
01.G23VP8090H	9	2,160	Galvanized	zS	76.7	42	SupplierStandard	0.8
01.G13VP8090H	9	2,160	Galvanized	sZ	76.7	42	SupplierStandard	0.8
01.G28VP8090H	9	2,160	Galvanized	sS	76.7	42	SupplierStandard	0.8
01.B18VP8090H	9	2,160	Bright	zZ	76.7	42	SupplierStandard	0.8
01.B23VP8090H	9	2,160	Bright	zS	76.7	42	SupplierStandard	0.8
01.B13VP8090H	9	2,160	Bright	sZ	76.7	42	SupplierStandard	0.8
01.B28VP8090H	9	2,160	Bright	sS	76.7	42	SupplierStandard	0.8
-	9	2,160	Others_Special	sZ	76.7	42	A-1	0.8
01.G18VP8100E	10	1,770	Galvanized	zZ	81.5	52	SupplierStandard	0.99
01.G23VP8100E	10	1,770	Galvanized	zS	81.5	52	SupplierStandard	0.99
01.G13VP8100E	10	1,770	Galvanized	sZ	81.5	52	SupplierStandard	0.99
01.G28VP8100E	10	1,770	Galvanized	sS	81.5	52	SupplierStandard	0.99
01.B18VP8100E	10	1,770	Bright	zZ	81.5	52	SupplierStandard	0.99
01.B23VP8100E	10	1,770	Bright	zS	81.5	52	SupplierStandard	0.99
01.B13VP8100E	10	1,770	Bright	sZ	81.5	52	SupplierStandard	0.99
01.B28VP8100E	10	1,770	Bright	sS	81.5	52	SupplierStandard	0.99
01.G18VP8100G	10	1,960	Galvanized	zZ	90.1	52	SupplierStandard	0.99
01.G23VP8100G	10	1,960	Galvanized	zS	90.1	52	SupplierStandard	0.99
01.G13VP8100G	10	1,960	Galvanized	sZ	90.1	52	SupplierStandard	0.99



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G28VP8100G	10	1,960	Galvanized	sS	90.1	52	SupplierStandard	0.99
01.B18VP8100G	10	1,960	Bright	zZ	90.1	52	SupplierStandard	0.99
01.B23VP8100G	10	1,960	Bright	zS	90.1	52	SupplierStandard	0.99
01.B13VP8100G	10	1,960	Bright	sZ	90.1	52	SupplierStandard	0.99
01.B28VP8100G	10	1,960	Bright	sS	90.1	52	SupplierStandard	0.99
01.G18VP8100H	10	2,160	Galvanized	zZ	94.7	52	SupplierStandard	0.99
01.G23VP8100H	10	2,160	Galvanized	zS	94.7	52	SupplierStandard	0.99
01.G13VP8100H	10	2,160	Galvanized	sZ	94.7	52	SupplierStandard	0.99
01.G28VP8100H	10	2,160	Galvanized	sS	94.7	52	SupplierStandard	0.99
01.B18VP8100H	10	2,160	Bright	zZ	94.7	52	SupplierStandard	0.99
01.B23VP8100H	10	2,160	Bright	zS	94.7	52	SupplierStandard	0.99
01.B13VP8100H	10	2,160	Bright	sZ	94.7	52	SupplierStandard	0.99
01.B28VP8100H	10	2,160	Bright	sS	94.7	52	SupplierStandard	0.99
01.G18VP8110E	11	1,770	Galvanized	zZ	98.6	63	SupplierStandard	1.2
01.G23VP8110E	11	1,770	Galvanized	zS	98.6	63	SupplierStandard	1.2
01.G13VP8110E	11	1,770	Galvanized	sZ	98.6	63	SupplierStandard	1.2
01.G28VP8110E	11	1,770	Galvanized	sS	98.6	63	SupplierStandard	1.2
01.B18VP8110E	11	1,770	Bright	zZ	98.6	63	SupplierStandard	1.2
01.B23VP8110E	11	1,770	Bright	zS	98.6	63	SupplierStandard	1.2
01.B13VP8110E	11	1,770	Bright	sZ	98.6	63	SupplierStandard	1.2
01.B28VP8110E	11	1,770	Bright	sS	98.6	63	SupplierStandard	1.2
01.G18VP8110G	11	1,960	Galvanized	zZ	109.1	63	SupplierStandard	1.2
01.G23VP8110G	11	1,960	Galvanized	zS	109.1	63	SupplierStandard	1.2
01.G13VP8110G	11	1,960	Galvanized	sZ	109.1	63	SupplierStandard	1.2
01.G28VP8110G	11	1,960	Galvanized	sS	109.1	63	SupplierStandard	1.2
01.B18VP8110G	11	1,960	Bright	zZ	109.1	63	SupplierStandard	1.2
01.B23VP8110G	11	1,960	Bright	zS	109.1	63	SupplierStandard	1.2
01.B13VP8110G	11	1,960	Bright	sZ	109.1	63	SupplierStandard	1.2
01.B28VP8110G	11	1,960	Bright	sS	109.1	63	SupplierStandard	1.2
01.G18VP8110H	11	2,160	Galvanized	zZ	114.6	63	SupplierStandard	1.2
01.G23VP8110H	11	2,160	Galvanized	zS	114.6	63	SupplierStandard	1.2



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G13VP8110H	11	2,160	Galvanized	sZ	114.6	63	SupplierStandard	1.2
01.G28VP8110H	11	2,160	Galvanized	sS	114.6	63	SupplierStandard	1.2
01.B18VP8110H	11	2,160	Bright	zZ	114.6	63	SupplierStandard	1.2
01.B23VP8110H	11	2,160	Bright	zS	114.6	63	SupplierStandard	1.2
01.B13VP8110H	11	2,160	Bright	sZ	114.6	63	SupplierStandard	1.2
01.B28VP8110H	11	2,160	Bright	sS	114.6	63	SupplierStandard	1.2
01.G18VP8120E	12	1,770	Galvanized	zZ	117.3	75	SupplierStandard	1.43
01.G23VP8120E	12	1,770	Galvanized	zS	117.3	75	SupplierStandard	1.43
01.G13VP8120E	12	1,770	Galvanized	sZ	117.3	75	SupplierStandard	1.43
01.G28VP8120E	12	1,770	Galvanized	sS	117.3	75	SupplierStandard	1.43
01.B18VP8120E	12	1,770	Bright	zZ	117.3	75	SupplierStandard	1.43
01.B23VP8120E	12	1,770	Bright	zS	117.3	75	SupplierStandard	1.43
01.B13VP8120E	12	1,770	Bright	sZ	117.3	75	SupplierStandard	1.43
01.B28VP8120E	12	1,770	Bright	sS	117.3	75	SupplierStandard	1.43
01.G18VP8120G	12	1,960	Galvanized	zZ	129.8	75	SupplierStandard	1.43
01.G23VP8120G	12	1,960	Galvanized	zS	129.8	75	SupplierStandard	1.43
01.G13VP8120G	12	1,960	Galvanized	sZ	129.8	75	SupplierStandard	1.43
01.G28VP8120G	12	1,960	Galvanized	sS	129.8	75	SupplierStandard	1.43
01.B18VP8120G	12	1,960	Bright	zZ	129.8	75	SupplierStandard	1.43
01.B23VP8120G	12	1,960	Bright	zS	129.8	75	SupplierStandard	1.43
01.B13VP8120G	12	1,960	Bright	sZ	129.8	75	SupplierStandard	1.43
01.B28VP8120G	12	1,960	Bright	sS	129.8	75	SupplierStandard	1.43
-	12	1,960	Others_Special	sZ	129.8	75	A-1	1.43
01.G18VP8120H	12	2,160	Galvanized	zZ	136.3	75	SupplierStandard	1.43
01.G23VP8120H	12	2,160	Galvanized	zS	136.3	75	SupplierStandard	1.43
01.G13VP8120H	12	2,160	Galvanized	sZ	136.3	75	SupplierStandard	1.43
01.G28VP8120H	12	2,160	Galvanized	sS	136.3	75	SupplierStandard	1.43
01.B18VP8120H	12	2,160	Bright	zZ	136.3	75	SupplierStandard	1.43
01.B23VP8120H	12	2,160	Bright	zS	136.3	75	SupplierStandard	1.43
01.B13VP8120H	12	2,160	Bright	sZ	136.3	75	SupplierStandard	1.43
01.B28VP8120H	12	2,160	Bright	sS	136.3	75	SupplierStandard	1.43



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G18VP8127E	12.7	1,770	Galvanized	zZ	131.4	85	SupplierStandard	1.6
01.G23VP8127E	12.7	1,770	Galvanized	zS	131.4	85	SupplierStandard	1.6
01.G13VP8127E	12.7	1,770	Galvanized	sZ	131.4	85	SupplierStandard	1.6
01.G28VP8127E	12.7	1,770	Galvanized	sS	131.4	85	SupplierStandard	1.6
01.B18VP8127E	12.7	1,770	Bright	zZ	131.4	85	SupplierStandard	1.6
01.B23VP8127E	12.7	1,770	Bright	zS	131.4	85	SupplierStandard	1.6
01.B13VP8127E	12.7	1,770	Bright	sZ	131.4	85	SupplierStandard	1.6
01.B28VP8127E	12.7	1,770	Bright	sS	131.4	85	SupplierStandard	1.6
01.G18VP8127G	12.7	1,960	Galvanized	zZ	145.4	85	SupplierStandard	1.6
01.G23VP8127G	12.7	1,960	Galvanized	zS	145.4	85	SupplierStandard	1.6
01.G13VP8127G	12.7	1,960	Galvanized	sZ	145.4	85	SupplierStandard	1.6
01.G28VP8127G	12.7	1,960	Galvanized	sS	145.4	85	SupplierStandard	1.6
01.B18VP8127G	12.7	1,960	Bright	zZ	145.4	85	SupplierStandard	1.6
01.B23VP8127G	12.7	1,960	Bright	zS	145.4	85	SupplierStandard	1.6
01.B13VP8127G	12.7	1,960	Bright	sZ	145.4	85	SupplierStandard	1.6
01.B28VP8127G	12.7	1,960	Bright	sS	145.4	85	SupplierStandard	1.6
01.G18VP8127H	12.7	2,160	Galvanized	zZ	152.7	85	SupplierStandard	1.6
01.G23VP8127H	12.7	2,160	Galvanized	zS	152.7	85	SupplierStandard	1.6
01.G13VP8127H	12.7	2,160	Galvanized	sZ	152.7	85	SupplierStandard	1.6
01.G28VP8127H	12.7	2,160	Galvanized	sS	152.7	85	SupplierStandard	1.6
01.B18VP8127H	12.7	2,160	Bright	zZ	152.7	85	SupplierStandard	1.6
01.B23VP8127H	12.7	2,160	Bright	zS	152.7	85	SupplierStandard	1.6
01.B13VP8127H	12.7	2,160	Bright	sZ	152.7	85	SupplierStandard	1.6
01.B28VP8127H	12.7	2,160	Bright	sS	152.7	85	SupplierStandard	1.6
01.G18VP8130E	13	1,770	Galvanized	zZ	137.7	88	SupplierStandard	1.68
01.G23VP8130E	13	1,770	Galvanized	zS	137.7	88	SupplierStandard	1.68
01.G13VP8130E	13	1,770	Galvanized	sZ	137.7	88	SupplierStandard	1.68
01.G28VP8130E	13	1,770	Galvanized	sS	137.7	88	SupplierStandard	1.68
01.B18VP8130E	13	1,770	Bright	zZ	137.7	88	SupplierStandard	1.68
01.B23VP8130E	13	1,770	Bright	zS	137.7	88	SupplierStandard	1.68
01.B13VP8130E	13	1,770	Bright	sZ	137.7	88	SupplierStandard	1.68



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B28VP8130E	13	1,770	Bright	sS	137.7	88	SupplierStandard	1.68
01.G18VP8130G	13	1,960	Galvanized	zZ	152.3	88	SupplierStandard	1.68
01.G23VP8130G	13	1,960	Galvanized	zS	152.3	88	SupplierStandard	1.68
01.G13VP8130G	13	1,960	Galvanized	sZ	152.3	88	SupplierStandard	1.68
01.G28VP8130G	13	1,960	Galvanized	sS	152.3	88	SupplierStandard	1.68
01.B18VP8130G	13	1,960	Bright	zZ	152.3	88	SupplierStandard	1.68
01.B23VP8130G	13	1,960	Bright	zS	152.3	88	SupplierStandard	1.68
01.B13VP8130G	13	1,960	Bright	sZ	152.3	88	SupplierStandard	1.68
01.B28VP8130G	13	1,960	Bright	sS	152.3	88	SupplierStandard	1.68
-	13	1,960	Others_Special	sZ	152.3	86	A-1	1.68
01.G18VP8130H	13	2,160	Galvanized	zZ	160	88	SupplierStandard	1.68
01.G23VP8130H	13	2,160	Galvanized	zS	160	88	SupplierStandard	1.68
01.G13VP8130H	13	2,160	Galvanized	sZ	160	88	SupplierStandard	1.68
01.G28VP8130H	13	2,160	Galvanized	sS	160	88	SupplierStandard	1.68
01.B18VP8130H	13	2,160	Bright	zZ	160	88	SupplierStandard	1.68
01.B23VP8130H	13	2,160	Bright	zS	160	88	SupplierStandard	1.68
01.B13VP8130H	13	2,160	Bright	sZ	160	88	SupplierStandard	1.68
01.B28VP8130H	13	2,160	Bright	sS	160	88	SupplierStandard	1.68
01.G18VP8140E	14	1,770	Galvanized	zZ	159.7	103	SupplierStandard	1.94
01.G23VP8140E	14	1,770	Galvanized	zS	159.7	103	SupplierStandard	1.94
01.G13VP8140E	14	1,770	Galvanized	sZ	159.7	103	SupplierStandard	1.94
01.G28VP8140E	14	1,770	Galvanized	sS	159.7	103	SupplierStandard	1.94
01.B18VP8140E	14	1,770	Bright	zZ	159.7	103	SupplierStandard	1.94
01.B23VP8140E	14	1,770	Bright	zS	159.7	103	SupplierStandard	1.94
01.B13VP8140E	14	1,770	Bright	sZ	159.7	103	SupplierStandard	1.94
01.B28VP8140E	14	1,770	Bright	sS	159.7	103	SupplierStandard	1.94
01.G18VP8140G	14	1,960	Galvanized	zZ	176.7	103	SupplierStandard	1.94
01.G23VP8140G	14	1,960	Galvanized	zS	176.7	103	SupplierStandard	1.94
01.G13VP8140G	14	1,960	Galvanized	sZ	176.7	103	SupplierStandard	1.94
01.G28VP8140G	14	1,960	Galvanized	sS	176.7	103	SupplierStandard	1.94
01.B18VP8140G	14	1,960	Bright	zZ	176.7	103	SupplierStandard	1.94



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B23VP8140G	14	1,960	Bright	zS	176.7	103	SupplierStandard	1.94
01.B13VP8140G	14	1,960	Bright	sZ	176.7	103	SupplierStandard	1.94
01.B28VP8140G	14	1,960	Bright	sS	176.7	103	SupplierStandard	1.94
01.G18VP8140H	14	2,160	Galvanized	zZ	185.6	103	SupplierStandard	1.94
01.G23VP8140H	14	2,160	Galvanized	zS	185.6	103	SupplierStandard	1.94
01.G13VP8140H	14	2,160	Galvanized	sZ	185.6	103	SupplierStandard	1.94
01.G28VP8140H	14	2,160	Galvanized	sS	185.6	103	SupplierStandard	1.94
01.B18VP8140H	14	2,160	Bright	zZ	185.6	103	SupplierStandard	1.94
01.B23VP8140H	14	2,160	Bright	zS	185.6	103	SupplierStandard	1.94
01.B13VP8140H	14	2,160	Bright	sZ	185.6	103	SupplierStandard	1.94
01.B28VP8140H	14	2,160	Bright	sS	185.6	103	SupplierStandard	1.94
01.G18VP8150E	15	1,770	Galvanized	zZ	183.3	118	SupplierStandard	2.23
01.G23VP8150E	15	1,770	Galvanized	zS	183.3	118	SupplierStandard	2.23
01.G13VP8150E	15	1,770	Galvanized	sZ	183.3	118	SupplierStandard	2.23
01.G28VP8150E	15	1,770	Galvanized	sS	183.3	118	SupplierStandard	2.23
01.B18VP8150E	15	1,770	Bright	zZ	183.3	118	SupplierStandard	2.23
01.B23VP8150E	15	1,770	Bright	zS	183.3	118	SupplierStandard	2.23
01.B13VP8150E	15	1,770	Bright	sZ	183.3	118	SupplierStandard	2.23
01.B28VP8150E	15	1,770	Bright	sS	183.3	118	SupplierStandard	2.23
01.G18VP8150G	15	1,960	Galvanized	zZ	202.8	118	SupplierStandard	2.23
01.G23VP8150G	15	1,960	Galvanized	zS	202.8	118	SupplierStandard	2.23
01.G13VP8150G	15	1,960	Galvanized	sZ	202.8	118	SupplierStandard	2.23
01.G28VP8150G	15	1,960	Galvanized	sS	202.8	118	SupplierStandard	2.23
01.B18VP8150G	15	1,960	Bright	zZ	202.8	118	SupplierStandard	2.23
01.B23VP8150G	15	1,960	Bright	zS	202.8	118	SupplierStandard	2.23
01.B13VP8150G	15	1,960	Bright	sZ	202.8	118	SupplierStandard	2.23
01.B28VP8150G	15	1,960	Bright	sS	202.8	118	SupplierStandard	2.23
01.G18VP8150H	15	2,160	Galvanized	zZ	213	118	SupplierStandard	2.23
01.G23VP8150H	15	2,160	Galvanized	zS	213	118	SupplierStandard	2.23
01.G13VP8150H	15	2,160	Galvanized	sZ	213	118	SupplierStandard	2.23
01.G28VP8150H	15	2,160	Galvanized	sS	213	118	SupplierStandard	2.23



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B18VP8150H	15	2,160	Bright	zZ	213	118	SupplierStandard	2.23
01.B23VP8150H	15	2,160	Bright	zS	213	118	SupplierStandard	2.23
01.B13VP8150H	15	2,160	Bright	sZ	213	118	SupplierStandard	2.23
01.B28VP8150H	15	2,160	Bright	sS	213	118	SupplierStandard	2.23
-	15	2,160	Others_Special	zS	213	118	A-1	2.23
01.G18VP8160E	16	1,770	Galvanized	zZ	208.6	134	SupplierStandard	2.54
01.G23VP8160E	16	1,770	Galvanized	zS	208.6	134	SupplierStandard	2.54
01.G13VP8160E	16	1,770	Galvanized	sZ	208.6	134	SupplierStandard	2.54
01.G28VP8160E	16	1,770	Galvanized	sS	208.6	134	SupplierStandard	2.54
01.B18VP8160E	16	1,770	Bright	zZ	208.6	134	SupplierStandard	2.54
01.B23VP8160E	16	1,770	Bright	zS	208.6	134	SupplierStandard	2.54
01.B13VP8160E	16	1,770	Bright	sZ	208.6	134	SupplierStandard	2.54
01.B28VP8160E	16	1,770	Bright	sS	208.6	134	SupplierStandard	2.54
01.G18VP8160G	16	1,960	Galvanized	zZ	230.7	134	SupplierStandard	2.54
01.G23VP8160G	16	1,960	Galvanized	zS	230.7	134	SupplierStandard	2.54
01.G13VP8160G	16	1,960	Galvanized	sZ	230.7	134	SupplierStandard	2.54
01.G28VP8160G	16	1,960	Galvanized	sS	230.7	134	SupplierStandard	2.54
01.B18VP8160G	16	1,960	Bright	zZ	230.7	134	SupplierStandard	2.54
01.B23VP8160G	16	1,960	Bright	zS	230.7	134	SupplierStandard	2.54
01.B13VP8160G	16	1,960	Bright	sZ	230.7	134	SupplierStandard	2.54
01.B28VP8160G	16	1,960	Bright	sS	230.7	134	SupplierStandard	2.54
01.G18VP8160H	16	2,160	Galvanized	zZ	242.4	134	SupplierStandard	2.54
01.G23VP8160H	16	2,160	Galvanized	zS	242.4	134	SupplierStandard	2.54
01.G13VP8160H	16	2,160	Galvanized	sZ	242.4	134	SupplierStandard	2.54
01.G28VP8160H	16	2,160	Galvanized	sS	242.4	134	SupplierStandard	2.54
01.B18VP8160H	16	2,160	Bright	zZ	242.4	134	SupplierStandard	2.54
01.B23VP8160H	16	2,160	Bright	zS	242.4	134	SupplierStandard	2.54
01.B13VP8160H	16	2,160	Bright	sZ	242.4	134	SupplierStandard	2.54
01.B28VP8160H	16	2,160	Bright	sS	242.4	134	SupplierStandard	2.54
01.G18VP8170E	17	1,770	Galvanized	zZ	235.5	151	SupplierStandard	2.87
01.G23VP8170E	17	1,770	Galvanized	zS	235.5	151	SupplierStandard	2.87



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G13VP8170E	17	1,770	Galvanized	sZ	235.5	151	SupplierStandard	2.87
01.G28VP8170E	17	1,770	Galvanized	sS	235.5	151	SupplierStandard	2.87
01.B18VP8170E	17	1,770	Bright	zZ	235.5	151	SupplierStandard	2.87
01.B23VP8170E	17	1,770	Bright	zS	235.5	151	SupplierStandard	2.87
01.B13VP8170E	17	1,770	Bright	sZ	235.5	151	SupplierStandard	2.87
01.B28VP8170E	17	1,770	Bright	sS	235.5	151	SupplierStandard	2.87
01.G18VP8170G	17	1,960	Galvanized	zZ	260.5	151	SupplierStandard	2.87
01.G23VP8170G	17	1,960	Galvanized	zS	260.5	151	SupplierStandard	2.87
01.G13VP8170G	17	1,960	Galvanized	sZ	260.5	151	SupplierStandard	2.87
01.G28VP8170G	17	1,960	Galvanized	sS	260.5	151	SupplierStandard	2.87
01.B18VP8170G	17	1,960	Bright	zZ	260.5	151	SupplierStandard	2.87
01.B23VP8170G	17	1,960	Bright	zS	260.5	151	SupplierStandard	2.87
01.B13VP8170G	17	1,960	Bright	sZ	260.5	151	SupplierStandard	2.87
01.B28VP8170G	17	1,960	Bright	sS	260.5	151	SupplierStandard	2.87
01.G18VP8170H	17	2,160	Galvanized	zZ	273.6	151	SupplierStandard	2.87
01.G23VP8170H	17	2,160	Galvanized	zS	273.6	151	SupplierStandard	2.87
01.G13VP8170H	17	2,160	Galvanized	sZ	273.6	151	SupplierStandard	2.87
01.G28VP8170H	17	2,160	Galvanized	sS	273.6	151	SupplierStandard	2.87
01.B18VP8170H	17	2,160	Bright	zZ	273.6	151	SupplierStandard	2.87
01.B23VP8170H	17	2,160	Bright	zS	273.6	151	SupplierStandard	2.87
01.B13VP8170H	17	2,160	Bright	sZ	273.6	151	SupplierStandard	2.87
01.B28VP8170H	17	2,160	Bright	sS	273.6	151	SupplierStandard	2.87
01.G18VP8180E	18	1,770	Galvanized	zZ	264	169	SupplierStandard	3.23
01.G23VP8180E	18	1,770	Galvanized	zS	264	169	SupplierStandard	3.23
01.G13VP8180E	18	1,770	Galvanized	sZ	264	169	SupplierStandard	3.23
01.G28VP8180E	18	1,770	Galvanized	sS	264	169	SupplierStandard	3.23
01.B18VP8180E	18	1,770	Bright	zZ	264	169	SupplierStandard	3.23
01.B23VP8180E	18	1,770	Bright	zS	264	169	SupplierStandard	3.23
01.B13VP8180E	18	1,770	Bright	sZ	264	169	SupplierStandard	3.23
01.B28VP8180E	18	1,770	Bright	sS	264	169	SupplierStandard	3.23
01.G18VP8180G	18	1,960	Galvanized	zZ	292	169	SupplierStandard	3.23



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G23VP8180G	18	1,960	Galvanized	zS	292	169	SupplierStandard	3.23
01.G13VP8180G	18	1,960	Galvanized	sZ	292	169	SupplierStandard	3.23
01.G28VP8180G	18	1,960	Galvanized	sS	292	169	SupplierStandard	3.23
01.B18VP8180G	18	1,960	Bright	zZ	292	169	SupplierStandard	3.23
01.B23VP8180G	18	1,960	Bright	zS	292	169	SupplierStandard	3.23
01.B13VP8180G	18	1,960	Bright	sZ	292	169	SupplierStandard	3.23
01.B28VP8180G	18	1,960	Bright	sS	292	169	SupplierStandard	3.23
01.G18VP8180H	18	2,160	Galvanized	zZ	306.8	169	SupplierStandard	3.23
01.G23VP8180H	18	2,160	Galvanized	zS	306.8	169	SupplierStandard	3.23
01.G13VP8180H	18	2,160	Galvanized	sZ	306.8	169	SupplierStandard	3.23
01.G28VP8180H	18	2,160	Galvanized	sS	306.8	169	SupplierStandard	3.23
01.B18VP8180H	18	2,160	Bright	zZ	306.8	169	SupplierStandard	3.23
01.B23VP8180H	18	2,160	Bright	zS	306.8	169	SupplierStandard	3.23
01.B13VP8180H	18	2,160	Bright	sZ	306.8	169	SupplierStandard	3.23
01.B28VP8180H	18	2,160	Bright	sS	306.8	169	SupplierStandard	3.23
01.G18VP8190E	19	1,770	Galvanized	zZ	294.2	189	SupplierStandard	3.58
01.G23VP8190E	19	1,770	Galvanized	zS	294.2	189	SupplierStandard	3.58
01.G13VP8190E	19	1,770	Galvanized	sZ	294.2	189	SupplierStandard	3.58
01.G28VP8190E	19	1,770	Galvanized	sS	294.2	189	SupplierStandard	3.58
01.B18VP8190E	19	1,770	Bright	zZ	294.2	189	SupplierStandard	3.58
01.B23VP8190E	19	1,770	Bright	zS	294.2	189	SupplierStandard	3.58
01.B13VP8190E	19	1,770	Bright	sZ	294.2	189	SupplierStandard	3.58
01.B28VP8190E	19	1,770	Bright	sS	294.2	189	SupplierStandard	3.58
01.G18VP8190G	19	1,960	Galvanized	zZ	325.4	189	SupplierStandard	3.58
01.G23VP8190G	19	1,960	Galvanized	zS	325.4	189	SupplierStandard	3.58
01.G13VP8190G	19	1,960	Galvanized	sZ	325.4	189	SupplierStandard	3.58
01.G28VP8190G	19	1,960	Galvanized	sS	325.4	189	SupplierStandard	3.58
01.B18VP8190G	19	1,960	Bright	zZ	325.4	189	SupplierStandard	3.58
01.B23VP8190G	19	1,960	Bright	zS	325.4	189	SupplierStandard	3.58
01.B13VP8190G	19	1,960	Bright	sZ	325.4	189	SupplierStandard	3.58
01.B28VP8190G	19	1,960	Bright	sS	325.4	189	SupplierStandard	3.58



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G18VP8190H	19	2,160	Galvanized	zZ	341.8	189	SupplierStandard	3.58
01.G23VP8190H	19	2,160	Galvanized	zS	341.8	189	SupplierStandard	3.58
01.G13VP8190H	19	2,160	Galvanized	sZ	341.8	189	SupplierStandard	3.58
01.G28VP8190H	19	2,160	Galvanized	sS	341.8	189	SupplierStandard	3.58
01.B18VP8190H	19	2,160	Bright	zZ	341.8	189	SupplierStandard	3.58
01.B23VP8190H	19	2,160	Bright	zS	341.8	189	SupplierStandard	3.58
01.B13VP8190H	19	2,160	Bright	sZ	341.8	189	SupplierStandard	3.58
01.B28VP8190H	19	2,160	Bright	sS	341.8	189	SupplierStandard	3.58
01.G18VP8200E	20	1,770	Galvanized	zZ	325.9	209	SupplierStandard	3.97
01.G23VP8200E	20	1,770	Galvanized	zS	325.9	209	SupplierStandard	3.97
01.G13VP8200E	20	1,770	Galvanized	sZ	325.9	209	SupplierStandard	3.97
01.G28VP8200E	20	1,770	Galvanized	sS	325.9	209	SupplierStandard	3.97
01.B18VP8200E	20	1,770	Bright	zZ	325.9	209	SupplierStandard	3.97
01.B23VP8200E	20	1,770	Bright	zS	325.9	209	SupplierStandard	3.97
01.B13VP8200E	20	1,770	Bright	sZ	325.9	209	SupplierStandard	3.97
01.B28VP8200E	20	1,770	Bright	sS	325.9	209	SupplierStandard	3.97
01.G18VP8200G	20	1,960	Galvanized	zZ	360.5	209	SupplierStandard	3.97
01.G23VP8200G	20	1,960	Galvanized	zS	360.5	209	SupplierStandard	3.97
01.G13VP8200G	20	1,960	Galvanized	sZ	360.5	209	SupplierStandard	3.97
01.G28VP8200G	20	1,960	Galvanized	sS	360.5	209	SupplierStandard	3.97
01.B18VP8200G	20	1,960	Bright	zZ	360.5	209	SupplierStandard	3.97
01.B23VP8200G	20	1,960	Bright	zS	360.5	209	SupplierStandard	3.97
01.B13VP8200G	20	1,960	Bright	sZ	360.5	209	SupplierStandard	3.97
01.B28VP8200G	20	1,960	Bright	sS	360.5	209	SupplierStandard	3.97
01.G18VP8200H	20	2,160	Galvanized	zZ	378.7	209	SupplierStandard	3.97
01.G23VP8200H	20	2,160	Galvanized	zS	378.7	209	SupplierStandard	3.97
01.G13VP8200H	20	2,160	Galvanized	sZ	378.7	209	SupplierStandard	3.97
01.G28VP8200H	20	2,160	Galvanized	sS	378.7	209	SupplierStandard	3.97
01.B18VP8200H	20	2,160	Bright	zZ	378.7	209	SupplierStandard	3.97
01.B23VP8200H	20	2,160	Bright	zS	378.7	209	SupplierStandard	3.97
01.B13VP8200H	20	2,160	Bright	sZ	378.7	209	SupplierStandard	3.97



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B28VP8200H	20	2,160	Bright	sS	378.7	209	SupplierStandard	3.97
01.G18VP8210E	21	1,770	Galvanized	zZ	359.3	231	SupplierStandard	4.37
01.G23VP8210E	21	1,770	Galvanized	zS	359.3	231	SupplierStandard	4.37
01.G13VP8210E	21	1,770	Galvanized	sZ	359.3	231	SupplierStandard	4.37
01.G28VP8210E	21	1,770	Galvanized	sS	359.3	231	SupplierStandard	4.37
01.B18VP8210E	21	1,770	Bright	zZ	359.3	231	SupplierStandard	4.37
01.B23VP8210E	21	1,770	Bright	zS	359.3	231	SupplierStandard	4.37
01.B13VP8210E	21	1,770	Bright	sZ	359.3	231	SupplierStandard	4.37
01.B28VP8210E	21	1,770	Bright	sS	359.3	231	SupplierStandard	4.37
01.G18VP8210G	21	1,960	Galvanized	zZ	397.5	231	SupplierStandard	4.37
01.G23VP8210G	21	1,960	Galvanized	zS	397.5	231	SupplierStandard	4.37
01.G13VP8210G	21	1,960	Galvanized	sZ	397.5	231	SupplierStandard	4.37
01.G28VP8210G	21	1,960	Galvanized	sS	397.5	231	SupplierStandard	4.37
01.B18VP8210G	21	1,960	Bright	zZ	397.5	231	SupplierStandard	4.37
01.B23VP8210G	21	1,960	Bright	zS	397.5	231	SupplierStandard	4.37
01.B13VP8210G	21	1,960	Bright	sZ	397.5	231	SupplierStandard	4.37
01.B28VP8210G	21	1,960	Bright	sS	397.5	231	SupplierStandard	4.37
01.G18VP8210H	21	2,160	Galvanized	zZ	417.5	231	SupplierStandard	4.37
01.G23VP8210H	21	2,160	Galvanized	zS	417.5	231	SupplierStandard	4.37
01.G13VP8210H	21	2,160	Galvanized	sZ	417.5	231	SupplierStandard	4.37
01.G28VP8210H	21	2,160	Galvanized	sS	417.5	231	SupplierStandard	4.37
01.B18VP8210H	21	2,160	Bright	zZ	417.5	231	SupplierStandard	4.37
01.B23VP8210H	21	2,160	Bright	zS	417.5	231	SupplierStandard	4.37
01.B13VP8210H	21	2,160	Bright	sZ	417.5	231	SupplierStandard	4.37
01.B28VP8210H	21	2,160	Bright	sS	417.5	231	SupplierStandard	4.37
01.G18VP8220E	22	1,770	Galvanized	zZ	394.4	253	SupplierStandard	4.8
01.G23VP8220E	22	1,770	Galvanized	zS	394.4	253	SupplierStandard	4.8
01.G13VP8220E	22	1,770	Galvanized	sZ	394.4	253	SupplierStandard	4.8
01.G28VP8220E	22	1,770	Galvanized	sS	394.4	253	SupplierStandard	4.8
01.B18VP8220E	22	1,770	Bright	zZ	394.4	253	SupplierStandard	4.8
01.B23VP8220E	22	1,770	Bright	zS	394.4	253	SupplierStandard	4.8



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B13VP8220E	22	1,770	Bright	sZ	394.4	253	SupplierStandard	4.8
01.B28VP8220E	22	1,770	Bright	sS	394.4	253	SupplierStandard	4.8
01.G18VP8220G	22	1,960	Galvanized	zZ	436.2	253	SupplierStandard	4.8
01.G23VP8220G	22	1,960	Galvanized	zS	436.2	253	SupplierStandard	4.8
01.G13VP8220G	22	1,960	Galvanized	sZ	436.2	253	SupplierStandard	4.8
01.G28VP8220G	22	1,960	Galvanized	sS	436.2	253	SupplierStandard	4.8
01.B18VP8220G	22	1,960	Bright	zZ	436.2	253	SupplierStandard	4.8
01.B23VP8220G	22	1,960	Bright	zS	436.2	253	SupplierStandard	4.8
01.B13VP8220G	22	1,960	Bright	sZ	436.2	253	SupplierStandard	4.8
01.B28VP8220G	22	1,960	Bright	sS	436.2	253	SupplierStandard	4.8
01.G18VP8220H	22	2,160	Galvanized	zZ	458.3	253	SupplierStandard	4.8
01.G23VP8220H	22	2,160	Galvanized	zS	458.3	253	SupplierStandard	4.8
01.G13VP8220H	22	2,160	Galvanized	sZ	458.3	253	SupplierStandard	4.8
01.G28VP8220H	22	2,160	Galvanized	sS	458.3	253	SupplierStandard	4.8
01.B18VP8220H	22	2,160	Bright	zZ	458.3	253	SupplierStandard	4.8
01.B23VP8220H	22	2,160	Bright	zS	458.3	253	SupplierStandard	4.8
01.B13VP8220H	22	2,160	Bright	sZ	458.3	253	SupplierStandard	4.8
01.B28VP8220H	22	2,160	Bright	sS	458.3	253	SupplierStandard	4.8
01.G18VP8224E	22.4	1,770	Galvanized	zZ	408.9	264	SupplierStandard	4.98
01.G23VP8224E	22.4	1,770	Galvanized	zS	408.9	264	SupplierStandard	4.98
01.G13VP8224E	22.4	1,770	Galvanized	sZ	408.9	264	SupplierStandard	4.98
01.G28VP8224E	22.4	1,770	Galvanized	sS	408.9	264	SupplierStandard	4.98
01.B18VP8224E	22.4	1,770	Bright	zZ	408.9	264	SupplierStandard	4.98
01.B23VP8224E	22.4	1,770	Bright	zS	408.9	264	SupplierStandard	4.98
01.B13VP8224E	22.4	1,770	Bright	sZ	408.9	264	SupplierStandard	4.98
01.B28VP8224E	22.4	1,770	Bright	sS	408.9	264	SupplierStandard	4.98
01.G18VP8224G	22.4	1,960	Galvanized	zZ	452.2	264	SupplierStandard	4.98
01.G23VP8224G	22.4	1,960	Galvanized	zS	452.2	264	SupplierStandard	4.98
01.G13VP8224G	22.4	1,960	Galvanized	sZ	452.2	264	SupplierStandard	4.98
01.G28VP8224G	22.4	1,960	Galvanized	sS	452.2	264	SupplierStandard	4.98
01.B18VP8224G	22.4	1,960	Bright	zZ	452.2	264	SupplierStandard	4.98



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B23VP8224G	22.4	1,960	Bright	zS	452.2	264	SupplierStandard	4.98
01.B13VP8224G	22.4	1,960	Bright	sZ	452.2	264	SupplierStandard	4.98
01.B28VP8224G	22.4	1,960	Bright	sS	452.2	264	SupplierStandard	4.98
01.G18VP8224H	22.4	2,160	Galvanized	zZ	475.1	264	SupplierStandard	4.98
01.G23VP8224H	22.4	2,160	Galvanized	zS	475.1	264	SupplierStandard	4.98
01.G13VP8224H	22.4	2,160	Galvanized	sZ	475.1	264	SupplierStandard	4.98
01.G28VP8224H	22.4	2,160	Galvanized	sS	475.1	264	SupplierStandard	4.98
01.B18VP8224H	22.4	2,160	Bright	zZ	475.1	264	SupplierStandard	4.98
01.B23VP8224H	22.4	2,160	Bright	zS	475.1	264	SupplierStandard	4.98
01.B13VP8224H	22.4	2,160	Bright	sZ	475.1	264	SupplierStandard	4.98
01.B28VP8224H	22.4	2,160	Bright	sS	475.1	264	SupplierStandard	4.98
01.G18VP8230E	23	1,770	Galvanized	zZ	431	277	SupplierStandard	5.25
01.G23VP8230E	23	1,770	Galvanized	zS	431	277	SupplierStandard	5.25
01.G13VP8230E	23	1,770	Galvanized	sZ	431	277	SupplierStandard	5.25
01.G28VP8230E	23	1,770	Galvanized	sS	431	277	SupplierStandard	5.25
01.B18VP8230E	23	1,770	Bright	zZ	431	277	SupplierStandard	5.25
01.B23VP8230E	23	1,770	Bright	zS	431	277	SupplierStandard	5.25
01.B13VP8230E	23	1,770	Bright	sZ	431	277	SupplierStandard	5.25
01.B28VP8230E	23	1,770	Bright	sS	431	277	SupplierStandard	5.25
01.G18VP8230G	23	1,960	Galvanized	zZ	476.8	277	SupplierStandard	5.25
01.G23VP8230G	23	1,960	Galvanized	zS	476.8	277	SupplierStandard	5.25
01.G13VP8230G	23	1,960	Galvanized	sZ	476.8	277	SupplierStandard	5.25
01.G28VP8230G	23	1,960	Galvanized	sS	476.8	277	SupplierStandard	5.25
01.B18VP8230G	23	1,960	Bright	zZ	476.8	277	SupplierStandard	5.25
01.B23VP8230G	23	1,960	Bright	zS	476.8	277	SupplierStandard	5.25
01.B13VP8230G	23	1,960	Bright	sZ	476.8	277	SupplierStandard	5.25
01.B28VP8230G	23	1,960	Bright	sS	476.8	277	SupplierStandard	5.25
01.G18VP8230H	23	2,160	Galvanized	zZ	500.9	277	SupplierStandard	5.25
01.G23VP8230H	23	2,160	Galvanized	zS	500.9	277	SupplierStandard	5.25
01.G13VP8230H	23	2,160	Galvanized	sZ	500.9	277	SupplierStandard	5.25
01.G28VP8230H	23	2,160	Galvanized	sS	500.9	277	SupplierStandard	5.25



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B18VP8230H	23	2,160	Bright	zZ	500.9	277	SupplierStandard	5.25
01.B23VP8230H	23	2,160	Bright	zS	500.9	277	SupplierStandard	5.25
01.B13VP8230H	23	2,160	Bright	sZ	500.9	277	SupplierStandard	5.25
01.B28VP8230H	23	2,160	Bright	sS	500.9	277	SupplierStandard	5.25
01.G18VP8240E	24	1,770	Galvanized	zZ	469.3	301	SupplierStandard	5.71
01.G23VP8240E	24	1,770	Galvanized	zS	469.3	301	SupplierStandard	5.71
01.G13VP8240E	24	1,770	Galvanized	sZ	469.3	301	SupplierStandard	5.71
01.G28VP8240E	24	1,770	Galvanized	sS	469.3	301	SupplierStandard	5.71
01.B18VP8240E	24	1,770	Bright	zZ	469.3	301	SupplierStandard	5.71
01.B23VP8240E	24	1,770	Bright	zS	469.3	301	SupplierStandard	5.71
01.B13VP8240E	24	1,770	Bright	sZ	469.3	301	SupplierStandard	5.71
01.B28VP8240E	24	1,770	Bright	sS	469.3	301	SupplierStandard	5.71
01.G18VP8240G	24	1,960	Galvanized	zZ	519.1	301	SupplierStandard	5.71
01.G23VP8240G	24	1,960	Galvanized	zS	519.1	301	SupplierStandard	5.71
01.G13VP8240G	24	1,960	Galvanized	sZ	519.1	301	SupplierStandard	5.71
01.G28VP8240G	24	1,960	Galvanized	sS	519.1	301	SupplierStandard	5.71
01.B18VP8240G	24	1,960	Bright	zZ	519.1	301	SupplierStandard	5.71
01.B23VP8240G	24	1,960	Bright	zS	519.1	301	SupplierStandard	5.71
01.B13VP8240G	24	1,960	Bright	sZ	519.1	301	SupplierStandard	5.71
01.B28VP8240G	24	1,960	Bright	sS	519.1	301	SupplierStandard	5.71
01.G18VP8240H	24	2,160	Galvanized	zZ	545.4	301	SupplierStandard	5.71
01.G23VP8240H	24	2,160	Galvanized	zS	545.4	301	SupplierStandard	5.71
01.G13VP8240H	24	2,160	Galvanized	sZ	545.4	301	SupplierStandard	5.71
01.G28VP8240H	24	2,160	Galvanized	sS	545.4	301	SupplierStandard	5.71
01.B18VP8240H	24	2,160	Bright	zZ	545.4	301	SupplierStandard	5.71
01.B23VP8240H	24	2,160	Bright	zS	545.4	301	SupplierStandard	5.71
01.B13VP8240H	24	2,160	Bright	sZ	545.4	301	SupplierStandard	5.71
01.B28VP8240H	24	2,160	Bright	sS	545.4	301	SupplierStandard	5.71
01.G18VP8250E	25	1,770	Galvanized	zZ	509.3	327	SupplierStandard	6.2
01.G23VP8250E	25	1,770	Galvanized	zS	509.3	327	SupplierStandard	6.2
01.G13VP8250E	25	1,770	Galvanized	sZ	509.3	327	SupplierStandard	6.2



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G28VP8250E	25	1,770	Galvanized	sS	509.3	327	SupplierStandard	6.2
01.B18VP8250E	25	1,770	Bright	zZ	509.3	327	SupplierStandard	6.2
01.B23VP8250E	25	1,770	Bright	zS	509.3	327	SupplierStandard	6.2
01.B13VP8250E	25	1,770	Bright	sZ	509.3	327	SupplierStandard	6.2
01.B28VP8250E	25	1,770	Bright	sS	509.3	327	SupplierStandard	6.2
01.G18VP8250G	25	1,960	Galvanized	zZ	563.3	327	SupplierStandard	6.2
01.G23VP8250G	25	1,960	Galvanized	zS	563.3	327	SupplierStandard	6.2
01.G13VP8250G	25	1,960	Galvanized	sZ	563.3	327	SupplierStandard	6.2
01.G28VP8250G	25	1,960	Galvanized	sS	563.3	327	SupplierStandard	6.2
01.B18VP8250G	25	1,960	Bright	zZ	563.3	327	SupplierStandard	6.2
01.B23VP8250G	25	1,960	Bright	zS	563.3	327	SupplierStandard	6.2
01.B13VP8250G	25	1,960	Bright	sZ	563.3	327	SupplierStandard	6.2
01.B28VP8250G	25	1,960	Bright	sS	563.3	327	SupplierStandard	6.2
01.G18VP8250H	25	2,160	Galvanized	zZ	591.8	327	SupplierStandard	6.2
01.G23VP8250H	25	2,160	Galvanized	zS	591.8	327	SupplierStandard	6.2
01.G13VP8250H	25	2,160	Galvanized	sZ	591.8	327	SupplierStandard	6.2
01.G28VP8250H	25	2,160	Galvanized	sS	591.8	327	SupplierStandard	6.2
01.B18VP8250H	25	2,160	Bright	zZ	591.8	327	SupplierStandard	6.2
01.B23VP8250H	25	2,160	Bright	zS	591.8	327	SupplierStandard	6.2
01.B13VP8250H	25	2,160	Bright	sZ	591.8	327	SupplierStandard	6.2
01.B28VP8250H	25	2,160	Bright	sS	591.8	327	SupplierStandard	6.2
01.G18VP8254E	25.4	1,770	Galvanized	zZ	525.7	339	SupplierStandard	6.4
01.G23VP8254E	25.4	1,770	Galvanized	zS	525.7	339	SupplierStandard	6.4
01.G13VP8254E	25.4	1,770	Galvanized	sZ	525.7	339	SupplierStandard	6.4
01.G28VP8254E	25.4	1,770	Galvanized	sS	525.7	339	SupplierStandard	6.4
01.B18VP8254E	25.4	1,770	Bright	zZ	525.7	339	SupplierStandard	6.4
01.B23VP8254E	25.4	1,770	Bright	zS	525.7	339	SupplierStandard	6.4
01.B13VP8254E	25.4	1,770	Bright	sZ	525.7	339	SupplierStandard	6.4
01.B28VP8254E	25.4	1,770	Bright	sS	525.7	339	SupplierStandard	6.4
01.G18VP8254G	25.4	1,960	Galvanized	zZ	581.5	339	SupplierStandard	6.4
01.G23VP8254G	25.4	1,960	Galvanized	zS	581.5	339	SupplierStandard	6.4



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G13VP8254G	25.4	1,960	Galvanized	sZ	581.5	339	SupplierStandard	6.4
01.G28VP8254G	25.4	1,960	Galvanized	sS	581.5	339	SupplierStandard	6.4
01.B18VP8254G	25.4	1,960	Bright	zZ	581.5	339	SupplierStandard	6.4
01.B23VP8254G	25.4	1,960	Bright	zS	581.5	339	SupplierStandard	6.4
01.B13VP8254G	25.4	1,960	Bright	sZ	581.5	339	SupplierStandard	6.4
01.B28VP8254G	25.4	1,960	Bright	sS	581.5	339	SupplierStandard	6.4
01.G18VP8254H	25.4	2,160	Galvanized	zZ	610.8	339	SupplierStandard	6.4
01.G23VP8254H	25.4	2,160	Galvanized	zS	610.8	339	SupplierStandard	6.4
01.G13VP8254H	25.4	2,160	Galvanized	sZ	610.8	339	SupplierStandard	6.4
01.G28VP8254H	25.4	2,160	Galvanized	sS	610.8	339	SupplierStandard	6.4
01.B18VP8254H	25.4	2,160	Bright	zZ	610.8	339	SupplierStandard	6.4
01.B23VP8254H	25.4	2,160	Bright	zS	610.8	339	SupplierStandard	6.4
01.B13VP8254H	25.4	2,160	Bright	sZ	610.8	339	SupplierStandard	6.4
01.B28VP8254H	25.4	2,160	Bright	sS	610.8	339	SupplierStandard	6.4
01.G18VP8260E	26	1,770	Galvanized	zZ	550.8	354	SupplierStandard	6.7
01.G23VP8260E	26	1,770	Galvanized	zS	550.8	354	SupplierStandard	6.7
01.G13VP8260E	26	1,770	Galvanized	sZ	550.8	354	SupplierStandard	6.7
01.G28VP8260E	26	1,770	Galvanized	sS	550.8	354	SupplierStandard	6.7
01.B18VP8260E	26	1,770	Bright	zZ	550.8	354	SupplierStandard	6.7
01.B23VP8260E	26	1,770	Bright	zS	550.8	354	SupplierStandard	6.7
01.B13VP8260E	26	1,770	Bright	sZ	550.8	354	SupplierStandard	6.7
01.B28VP8260E	26	1,770	Bright	sS	550.8	354	SupplierStandard	6.7
01.G18VP8260G	26	1,960	Galvanized	zZ	609.3	354	SupplierStandard	6.7
01.G23VP8260G	26	1,960	Galvanized	zS	609.3	354	SupplierStandard	6.7
01.G13VP8260G	26	1,960	Galvanized	sZ	609.3	354	SupplierStandard	6.7
01.G28VP8260G	26	1,960	Galvanized	sS	609.3	354	SupplierStandard	6.7
01.B18VP8260G	26	1,960	Bright	zZ	609.3	354	SupplierStandard	6.7
01.B23VP8260G	26	1,960	Bright	zS	609.3	354	SupplierStandard	6.7
01.B13VP8260G	26	1,960	Bright	sZ	609.3	354	SupplierStandard	6.7
01.B28VP8260G	26	1,960	Bright	sS	609.3	354	SupplierStandard	6.7
01.G18VP8260H	26	2,160	Galvanized	zZ	640	354	SupplierStandard	6.7



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G23VP8260H	26	2,160	Galvanized	zS	640	354	SupplierStandard	6.7
01.G13VP8260H	26	2,160	Galvanized	sZ	640	354	SupplierStandard	6.7
01.G28VP8260H	26	2,160	Galvanized	sS	640	354	SupplierStandard	6.7
01.B18VP8260H	26	2,160	Bright	zZ	640	354	SupplierStandard	6.7
01.B23VP8260H	26	2,160	Bright	zS	640	354	SupplierStandard	6.7
01.B13VP8260H	26	2,160	Bright	sZ	640	354	SupplierStandard	6.7
01.B28VP8260H	26	2,160	Bright	sS	640	354	SupplierStandard	6.7
01.G18VP8270E	27	1,770	Galvanized	zZ	594	381	SupplierStandard	7.23
01.G23VP8270E	27	1,770	Galvanized	zS	594	381	SupplierStandard	7.23
01.G13VP8270E	27	1,770	Galvanized	sZ	594	381	SupplierStandard	7.23
01.G28VP8270E	27	1,770	Galvanized	sS	594	381	SupplierStandard	7.23
01.B18VP8270E	27	1,770	Bright	zZ	594	381	SupplierStandard	7.23
01.B23VP8270E	27	1,770	Bright	zS	594	381	SupplierStandard	7.23
01.B13VP8270E	27	1,770	Bright	sZ	594	381	SupplierStandard	7.23
01.B28VP8270E	27	1,770	Bright	sS	594	381	SupplierStandard	7.23
01.G18VP8270G	27	1,960	Galvanized	zZ	657	381	SupplierStandard	7.23
01.G23VP8270G	27	1,960	Galvanized	zS	657	381	SupplierStandard	7.23
01.G13VP8270G	27	1,960	Galvanized	sZ	657	381	SupplierStandard	7.23
01.G28VP8270G	27	1,960	Galvanized	sS	657	381	SupplierStandard	7.23
01.B18VP8270G	27	1,960	Bright	zZ	657	381	SupplierStandard	7.23
01.B23VP8270G	27	1,960	Bright	zS	657	381	SupplierStandard	7.23
01.B13VP8270G	27	1,960	Bright	sZ	657	381	SupplierStandard	7.23
01.B28VP8270G	27	1,960	Bright	sS	657	381	SupplierStandard	7.23
01.G18VP8270H	27	2,160	Galvanized	zZ	690.2	381	SupplierStandard	7.23
01.G23VP8270H	27	2,160	Galvanized	zS	690.2	381	SupplierStandard	7.23
01.G13VP8270H	27	2,160	Galvanized	sZ	690.2	381	SupplierStandard	7.23
01.G28VP8270H	27	2,160	Galvanized	sS	690.2	381	SupplierStandard	7.23
01.B18VP8270H	27	2,160	Bright	zZ	690.2	381	SupplierStandard	7.23
01.B23VP8270H	27	2,160	Bright	zS	690.2	381	SupplierStandard	7.23
01.B13VP8270H	27	2,160	Bright	sZ	690.2	381	SupplierStandard	7.23
01.B28VP8270H	27	2,160	Bright	sS	690.2	381	SupplierStandard	7.23



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G18VP8280E	28	1,770	Galvanized	zZ	638.8	410	SupplierStandard	7.78
01.G23VP8280E	28	1,770	Galvanized	zS	638.8	410	SupplierStandard	7.78
01.G13VP8280E	28	1,770	Galvanized	sZ	638.8	410	SupplierStandard	7.78
01.G28VP8280E	28	1,770	Galvanized	sS	638.8	410	SupplierStandard	7.78
01.B18VP8280E	28	1,770	Bright	zZ	638.8	410	SupplierStandard	7.78
01.B23VP8280E	28	1,770	Bright	zS	638.8	410	SupplierStandard	7.78
01.B13VP8280E	28	1,770	Bright	sZ	638.8	410	SupplierStandard	7.78
01.B28VP8280E	28	1,770	Bright	sS	638.8	410	SupplierStandard	7.78
01.G18VP8280G	28	1,960	Galvanized	zZ	706.6	410	SupplierStandard	7.78
01.G23VP8280G	28	1,960	Galvanized	zS	706.6	410	SupplierStandard	7.78
01.G13VP8280G	28	1,960	Galvanized	sZ	706.6	410	SupplierStandard	7.78
01.G28VP8280G	28	1,960	Galvanized	sS	706.6	410	SupplierStandard	7.78
01.B18VP8280G	28	1,960	Bright	zZ	706.6	410	SupplierStandard	7.78
01.B23VP8280G	28	1,960	Bright	zS	706.6	410	SupplierStandard	7.78
01.B13VP8280G	28	1,960	Bright	sZ	706.6	410	SupplierStandard	7.78
01.B28VP8280G	28	1,960	Bright	sS	706.6	410	SupplierStandard	7.78
01.G18VP8280H	28	2,160	Galvanized	zZ	742.3	410	SupplierStandard	7.78
01.G23VP8280H	28	2,160	Galvanized	zS	742.3	410	SupplierStandard	7.78
01.G13VP8280H	28	2,160	Galvanized	sZ	742.3	410	SupplierStandard	7.78
01.G28VP8280H	28	2,160	Galvanized	sS	742.3	410	SupplierStandard	7.78
01.B18VP8280H	28	2,160	Bright	zZ	742.3	410	SupplierStandard	7.78
01.B23VP8280H	28	2,160	Bright	zS	742.3	410	SupplierStandard	7.78
01.B13VP8280H	28	2,160	Bright	sZ	742.3	410	SupplierStandard	7.78
01.B28VP8280H	28	2,160	Bright	sS	742.3	410	SupplierStandard	7.78
01.G18VP8286E	28.6	1,770	Galvanized	zZ	666.5	430	SupplierStandard	8.11
01.G23VP8286E	28.6	1,770	Galvanized	zS	666.5	430	SupplierStandard	8.11
01.G13VP8286E	28.6	1,770	Galvanized	sZ	666.5	430	SupplierStandard	8.11
01.G28VP8286E	28.6	1,770	Galvanized	sS	666.5	430	SupplierStandard	8.11
01.B18VP8286E	28.6	1,770	Bright	zZ	666.5	430	SupplierStandard	8.11
01.B23VP8286E	28.6	1,770	Bright	zS	666.5	430	SupplierStandard	8.11
01.B13VP8286E	28.6	1,770	Bright	sZ	666.5	430	SupplierStandard	8.11



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B28VP8286E	28.6	1,770	Bright	sS	666.5	430	SupplierStandard	8.11
01.G18VP8286G	28.6	1,960	Galvanized	zZ	737.2	430	SupplierStandard	8.11
01.G23VP8286G	28.6	1,960	Galvanized	zS	737.2	430	SupplierStandard	8.11
01.G13VP8286G	28.6	1,960	Galvanized	sZ	737.2	430	SupplierStandard	8.11
01.G28VP8286G	28.6	1,960	Galvanized	sS	737.2	430	SupplierStandard	8.11
01.B18VP8286G	28.6	1,960	Bright	zZ	737.2	430	SupplierStandard	8.11
01.B23VP8286G	28.6	1,960	Bright	zS	737.2	430	SupplierStandard	8.11
01.B13VP8286G	28.6	1,960	Bright	sZ	737.2	430	SupplierStandard	8.11
01.B28VP8286G	28.6	1,960	Bright	sS	737.2	430	SupplierStandard	8.11
01.G18VP8286H	28.6	2,160	Galvanized	zZ	774.5	430	SupplierStandard	8.11
01.G23VP8286H	28.6	2,160	Galvanized	zS	774.5	430	SupplierStandard	8.11
01.G13VP8286H	28.6	2,160	Galvanized	sZ	774.5	430	SupplierStandard	8.11
01.G28VP8286H	28.6	2,160	Galvanized	sS	774.5	430	SupplierStandard	8.11
01.B18VP8286H	28.6	2,160	Bright	zZ	774.5	430	SupplierStandard	8.11
01.B23VP8286H	28.6	2,160	Bright	zS	774.5	430	SupplierStandard	8.11
01.B13VP8286H	28.6	2,160	Bright	sZ	774.5	430	SupplierStandard	8.11
01.B28VP8286H	28.6	2,160	Bright	sS	774.5	430	SupplierStandard	8.11
01.G18VP8290E	29	1,770	Galvanized	zZ	685.3	440	SupplierStandard	8.34
01.G23VP8290E	29	1,770	Galvanized	zS	685.3	440	SupplierStandard	8.34
01.G13VP8290E	29	1,770	Galvanized	sZ	685.3	440	SupplierStandard	8.34
01.G28VP8290E	29	1,770	Galvanized	sS	685.3	440	SupplierStandard	8.34
01.B18VP8290E	29	1,770	Bright	zZ	685.3	440	SupplierStandard	8.34
01.B23VP8290E	29	1,770	Bright	zS	685.3	440	SupplierStandard	8.34
01.B13VP8290E	29	1,770	Bright	sZ	685.3	440	SupplierStandard	8.34
01.B28VP8290E	29	1,770	Bright	sS	685.3	440	SupplierStandard	8.34
01.G18VP8290G	29	1,960	Galvanized	zZ	758	440	SupplierStandard	8.34
01.G23VP8290G	29	1,960	Galvanized	zS	758	440	SupplierStandard	8.34
01.G13VP8290G	29	1,960	Galvanized	sZ	758	440	SupplierStandard	8.34
01.G28VP8290G	29	1,960	Galvanized	sS	758	440	SupplierStandard	8.34
01.B18VP8290G	29	1,960	Bright	zZ	758	440	SupplierStandard	8.34
01.B23VP8290G	29	1,960	Bright	zS	758	440	SupplierStandard	8.34



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B13VP8290G	29	1,960	Bright	sZ	758	440	SupplierStandard	8.34
01.B28VP8290G	29	1,960	Bright	sS	758	440	SupplierStandard	8.34
01.G18VP8290H	29	2,160	Galvanized	zZ	796.3	440	SupplierStandard	8.34
01.G23VP8290H	29	2,160	Galvanized	zS	796.3	440	SupplierStandard	8.34
01.G13VP8290H	29	2,160	Galvanized	sZ	796.3	440	SupplierStandard	8.34
01.G28VP8290H	29	2,160	Galvanized	sS	796.3	440	SupplierStandard	8.34
01.B18VP8290H	29	2,160	Bright	zZ	796.3	440	SupplierStandard	8.34
01.B23VP8290H	29	2,160	Bright	zS	796.3	440	SupplierStandard	8.34
01.B13VP8290H	29	2,160	Bright	sZ	796.3	440	SupplierStandard	8.34
01.B28VP8290H	29	2,160	Bright	sS	796.3	440	SupplierStandard	8.34
01.G18VP8300E	30	1,770	Galvanized	zZ	733.4	471	SupplierStandard	8.93
01.G23VP8300E	30	1,770	Galvanized	zS	733.4	471	SupplierStandard	8.93
01.G13VP8300E	30	1,770	Galvanized	sZ	733.4	471	SupplierStandard	8.93
01.G28VP8300E	30	1,770	Galvanized	sS	733.4	471	SupplierStandard	8.93
01.B18VP8300E	30	1,770	Bright	zZ	733.4	471	SupplierStandard	8.93
01.B23VP8300E	30	1,770	Bright	zS	733.4	471	SupplierStandard	8.93
01.B13VP8300E	30	1,770	Bright	sZ	733.4	471	SupplierStandard	8.93
01.B28VP8300E	30	1,770	Bright	sS	733.4	471	SupplierStandard	8.93
01.G18VP8300G	30	1,960	Galvanized	zZ	811.1	471	SupplierStandard	8.93
01.G23VP8300G	30	1,960	Galvanized	zS	811.1	471	SupplierStandard	8.93
01.G13VP8300G	30	1,960	Galvanized	sZ	811.1	471	SupplierStandard	8.93
01.G28VP8300G	30	1,960	Galvanized	sS	811.1	471	SupplierStandard	8.93
01.B18VP8300G	30	1,960	Bright	zZ	811.1	471	SupplierStandard	8.93
01.B23VP8300G	30	1,960	Bright	zS	811.1	471	SupplierStandard	8.93
01.B13VP8300G	30	1,960	Bright	sZ	811.1	471	SupplierStandard	8.93
01.B28VP8300G	30	1,960	Bright	sS	811.1	471	SupplierStandard	8.93
01.G18VP8300H	30	2,160	Galvanized	zZ	852.1	471	SupplierStandard	8.93
01.G23VP8300H	30	2,160	Galvanized	zS	852.1	471	SupplierStandard	8.93
01.G13VP8300H	30	2,160	Galvanized	sZ	852.1	471	SupplierStandard	8.93
01.G28VP8300H	30	2,160	Galvanized	sS	852.1	471	SupplierStandard	8.93
01.B18VP8300H	30	2,160	Bright	zZ	852.1	471	SupplierStandard	8.93



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B23VP8300H	30	2,160	Bright	zS	852.1	471	SupplierStandard	8.93
01.B13VP8300H	30	2,160	Bright	sZ	852.1	471	SupplierStandard	8.93
01.B28VP8300H	30	2,160	Bright	sS	852.1	471	SupplierStandard	8.93
01.G18VP8310E	31	1,770	Galvanized	zZ	783.1	503	SupplierStandard	9.53
01.G23VP8310E	31	1,770	Galvanized	zS	783.1	503	SupplierStandard	9.53
01.G13VP8310E	31	1,770	Galvanized	sZ	783.1	503	SupplierStandard	9.53
01.G28VP8310E	31	1,770	Galvanized	sS	783.1	503	SupplierStandard	9.53
01.B18VP8310E	31	1,770	Bright	zZ	783.1	503	SupplierStandard	9.53
01.B23VP8310E	31	1,770	Bright	zS	783.1	503	SupplierStandard	9.53
01.B13VP8310E	31	1,770	Bright	sZ	783.1	503	SupplierStandard	9.53
01.B28VP8310E	31	1,770	Bright	sS	783.1	503	SupplierStandard	9.53
01.G18VP8310G	31	1,960	Galvanized	zZ	866.1	503	SupplierStandard	9.53
01.G23VP8310G	31	1,960	Galvanized	zS	866.1	503	SupplierStandard	9.53
01.G13VP8310G	31	1,960	Galvanized	sZ	866.1	503	SupplierStandard	9.53
01.G28VP8310G	31	1,960	Galvanized	sS	866.1	503	SupplierStandard	9.53
01.B18VP8310G	31	1,960	Bright	zZ	866.1	503	SupplierStandard	9.53
01.B23VP8310G	31	1,960	Bright	zS	866.1	503	SupplierStandard	9.53
01.B13VP8310G	31	1,960	Bright	sZ	866.1	503	SupplierStandard	9.53
01.B28VP8310G	31	1,960	Bright	sS	866.1	503	SupplierStandard	9.53
01.G18VP8310H	31	2,160	Galvanized	zZ	909.9	503	SupplierStandard	9.53
01.G23VP8310H	31	2,160	Galvanized	zS	909.9	503	SupplierStandard	9.53
01.G13VP8310H	31	2,160	Galvanized	sZ	909.9	503	SupplierStandard	9.53
01.G28VP8310H	31	2,160	Galvanized	sS	909.9	503	SupplierStandard	9.53
01.B18VP8310H	31	2,160	Bright	zZ	909.9	503	SupplierStandard	9.53
01.B23VP8310H	31	2,160	Bright	zS	909.9	503	SupplierStandard	9.53
01.B13VP8310H	31	2,160	Bright	sZ	909.9	503	SupplierStandard	9.53
01.B28VP8310H	31	2,160	Bright	sS	909.9	503	SupplierStandard	9.53
01.G18VP8320E	32	1,770	Galvanized	zZ	834.4	536	SupplierStandard	10.15
01.G23VP8320E	32	1,770	Galvanized	zS	834.4	536	SupplierStandard	10.15
01.G13VP8320E	32	1,770	Galvanized	sZ	834.4	536	SupplierStandard	10.15
01.G28VP8320E	32	1,770	Galvanized	sS	834.4	536	SupplierStandard	10.15



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B18VP8320E	32	1,770	Bright	zZ	834.4	536	SupplierStandard	10.15
01.B23VP8320E	32	1,770	Bright	zS	834.4	536	SupplierStandard	10.15
01.B13VP8320E	32	1,770	Bright	sZ	834.4	536	SupplierStandard	10.15
01.B28VP8320E	32	1,770	Bright	sS	834.4	536	SupplierStandard	10.15
01.G18VP8320G	32	1,960	Galvanized	zZ	922.9	536	SupplierStandard	10.15
01.G23VP8320G	32	1,960	Galvanized	zS	922.9	536	SupplierStandard	10.15
01.G13VP8320G	32	1,960	Galvanized	sZ	922.9	536	SupplierStandard	10.15
01.G28VP8320G	32	1,960	Galvanized	sS	922.9	536	SupplierStandard	10.15
01.B18VP8320G	32	1,960	Bright	zZ	922.9	536	SupplierStandard	10.15
01.B23VP8320G	32	1,960	Bright	zS	922.9	536	SupplierStandard	10.15
01.B13VP8320G	32	1,960	Bright	sZ	922.9	536	SupplierStandard	10.15
01.B28VP8320G	32	1,960	Bright	sS	922.9	536	SupplierStandard	10.15
01.G18VP8320H	32	2,160	Galvanized	zZ	969.5	536	SupplierStandard	10.15
01.G23VP8320H	32	2,160	Galvanized	zS	969.5	536	SupplierStandard	10.15
01.G13VP8320H	32	2,160	Galvanized	sZ	969.5	536	SupplierStandard	10.15
01.G28VP8320H	32	2,160	Galvanized	sS	969.5	536	SupplierStandard	10.15
01.B18VP8320H	32	2,160	Bright	zZ	969.5	536	SupplierStandard	10.15
01.B23VP8320H	32	2,160	Bright	zS	969.5	536	SupplierStandard	10.15
01.B13VP8320H	32	2,160	Bright	sZ	969.5	536	SupplierStandard	10.15
01.B28VP8320H	32	2,160	Bright	sS	969.5	536	SupplierStandard	10.15
01.G18VP8330E	33	1,770	Galvanized	zZ	887.4	570	SupplierStandard	10.8
01.G23VP8330E	33	1,770	Galvanized	zS	887.4	570	SupplierStandard	10.8
01.G13VP8330E	33	1,770	Galvanized	sZ	887.4	570	SupplierStandard	10.8
01.G28VP8330E	33	1,770	Galvanized	sS	887.4	570	SupplierStandard	10.8
01.B18VP8330E	33	1,770	Bright	zZ	887.4	570	SupplierStandard	10.8
01.B23VP8330E	33	1,770	Bright	zS	887.4	570	SupplierStandard	10.8
01.B13VP8330E	33	1,770	Bright	sZ	887.4	570	SupplierStandard	10.8
01.B28VP8330E	33	1,770	Bright	sS	887.4	570	SupplierStandard	10.8
01.G18VP8330G	33	1,960	Galvanized	zZ	981.5	570	SupplierStandard	10.8
01.G23VP8330G	33	1,960	Galvanized	zS	981.5	570	SupplierStandard	10.8
01.G13VP8330G	33	1,960	Galvanized	sZ	981.5	570	SupplierStandard	10.8



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G28VP8330G	33	1,960	Galvanized	sS	981.5	570	SupplierStandard	10.8
01.B18VP8330G	33	1,960	Bright	zZ	981.5	570	SupplierStandard	10.8
01.B23VP8330G	33	1,960	Bright	zS	981.5	570	SupplierStandard	10.8
01.B13VP8330G	33	1,960	Bright	sZ	981.5	570	SupplierStandard	10.8
01.B28VP8330G	33	1,960	Bright	sS	981.5	570	SupplierStandard	10.8
01.G18VP8330H	33	2,160	Galvanized	zZ	1,031	570	SupplierStandard	10.8
01.G23VP8330H	33	2,160	Galvanized	zS	1,031	570	SupplierStandard	10.8
01.G13VP8330H	33	2,160	Galvanized	sZ	1,031	570	SupplierStandard	10.8
01.G28VP8330H	33	2,160	Galvanized	sS	1,031	570	SupplierStandard	10.8
01.B18VP8330H	33	2,160	Bright	zZ	1,031	570	SupplierStandard	10.8
01.B23VP8330H	33	2,160	Bright	zS	1,031	570	SupplierStandard	10.8
01.B13VP8330H	33	2,160	Bright	sZ	1,031	570	SupplierStandard	10.8
01.B28VP8330H	33	2,160	Bright	sS	1,031	570	SupplierStandard	10.8
01.G18VP8340E	34	1,770	Galvanized	zZ	941.9	605	SupplierStandard	11.46
01.G23VP8340E	34	1,770	Galvanized	zS	941.9	605	SupplierStandard	11.46
01.G13VP8340E	34	1,770	Galvanized	sZ	941.9	605	SupplierStandard	11.46
01.G28VP8340E	34	1,770	Galvanized	sS	941.9	605	SupplierStandard	11.46
01.B18VP8340E	34	1,770	Bright	zZ	941.9	605	SupplierStandard	11.46
01.B23VP8340E	34	1,770	Bright	zS	941.9	605	SupplierStandard	11.46
01.B13VP8340E	34	1,770	Bright	sZ	941.9	605	SupplierStandard	11.46
01.B28VP8340E	34	1,770	Bright	sS	941.9	605	SupplierStandard	11.46
01.G18VP8340G	34	1,960	Galvanized	zZ	1,042	605	SupplierStandard	11.46
01.G23VP8340G	34	1,960	Galvanized	zS	1,042	605	SupplierStandard	11.46
01.G13VP8340G	34	1,960	Galvanized	sZ	1,042	605	SupplierStandard	11.46
01.G28VP8340G	34	1,960	Galvanized	sS	1,042	605	SupplierStandard	11.46
01.B18VP8340G	34	1,960	Bright	zZ	1,042	605	SupplierStandard	11.46
01.B23VP8340G	34	1,960	Bright	zS	1,042	605	SupplierStandard	11.46
01.B13VP8340G	34	1,960	Bright	sZ	1,042	605	SupplierStandard	11.46
01.B28VP8340G	34	1,960	Bright	sS	1,042	605	SupplierStandard	11.46
01.G18VP8340H	34	2,160	Galvanized	zZ	1,095	605	SupplierStandard	11.46
01.G23VP8340H	34	2,160	Galvanized	zS	1,095	605	SupplierStandard	11.46



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G13VP8340H	34	2,160	Galvanized	sZ	1,095	605	SupplierStandard	11.46
01.G28VP8340H	34	2,160	Galvanized	sS	1,095	605	SupplierStandard	11.46
01.B18VP8340H	34	2,160	Bright	zZ	1,095	605	SupplierStandard	11.46
01.B23VP8340H	34	2,160	Bright	zS	1,095	605	SupplierStandard	11.46
01.B13VP8340H	34	2,160	Bright	sZ	1,095	605	SupplierStandard	11.46
01.B28VP8340H	34	2,160	Bright	sS	1,095	605	SupplierStandard	11.46
01.G18VP8350E	35	1,770	Galvanized	zZ	998.2	641	SupplierStandard	12.15
01.G23VP8350E	35	1,770	Galvanized	zS	998.2	641	SupplierStandard	12.15
01.G13VP8350E	35	1,770	Galvanized	sZ	998.2	641	SupplierStandard	12.15
01.G28VP8350E	35	1,770	Galvanized	sS	998.2	641	SupplierStandard	12.15
01.B18VP8350E	35	1,770	Bright	zZ	998.2	641	SupplierStandard	12.15
01.B23VP8350E	35	1,770	Bright	zS	998.2	641	SupplierStandard	12.15
01.B13VP8350E	35	1,770	Bright	sZ	998.2	641	SupplierStandard	12.15
01.B28VP8350E	35	1,770	Bright	sS	998.2	641	SupplierStandard	12.15
01.G18VP8350G	35	1,960	Galvanized	zZ	1,104	641	SupplierStandard	12.15
01.G23VP8350G	35	1,960	Galvanized	zS	1,104	641	SupplierStandard	12.15
01.G13VP8350G	35	1,960	Galvanized	sZ	1,104	641	SupplierStandard	12.15
01.G28VP8350G	35	1,960	Galvanized	sS	1,104	641	SupplierStandard	12.15
01.B18VP8350G	35	1,960	Bright	zZ	1,104	641	SupplierStandard	12.15
01.B23VP8350G	35	1,960	Bright	zS	1,104	641	SupplierStandard	12.15
01.B13VP8350G	35	1,960	Bright	sZ	1,104	641	SupplierStandard	12.15
01.B28VP8350G	35	1,960	Bright	sS	1,104	641	SupplierStandard	12.15
01.G18VP8350H	35	2,160	Galvanized	zZ	1,160	641	SupplierStandard	12.15
01.G23VP8350H	35	2,160	Galvanized	zS	1,160	641	SupplierStandard	12.15
01.G13VP8350H	35	2,160	Galvanized	sZ	1,160	641	SupplierStandard	12.15
01.G28VP8350H	35	2,160	Galvanized	sS	1,160	641	SupplierStandard	12.15
01.B18VP8350H	35	2,160	Bright	zZ	1,160	641	SupplierStandard	12.15
01.B23VP8350H	35	2,160	Bright	zS	1,160	641	SupplierStandard	12.15
01.B13VP8350H	35	2,160	Bright	sZ	1,160	641	SupplierStandard	12.15
01.B28VP8350H	35	2,160	Bright	sS	1,160	641	SupplierStandard	12.15
01.G18VP8360E	36	1,770	Galvanized	zZ	1,056	678	SupplierStandard	12.85



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G23VP8360E	36	1,770	Galvanized	zS	1,056	678	SupplierStandard	12.85
01.G13VP8360E	36	1,770	Galvanized	sZ	1,056	678	SupplierStandard	12.85
01.G28VP8360E	36	1,770	Galvanized	sS	1,056	678	SupplierStandard	12.85
01.B18VP8360E	36	1,770	Bright	zZ	1,056	678	SupplierStandard	12.85
01.B23VP8360E	36	1,770	Bright	zS	1,056	678	SupplierStandard	12.85
01.B13VP8360E	36	1,770	Bright	sZ	1,056	678	SupplierStandard	12.85
01.B28VP8360E	36	1,770	Bright	sS	1,056	678	SupplierStandard	12.85
01.G18VP8360G	36	1,960	Galvanized	zZ	1,168	678	SupplierStandard	12.85
01.G23VP8360G	36	1,960	Galvanized	zS	1,168	678	SupplierStandard	12.85
01.G13VP8360G	36	1,960	Galvanized	sZ	1,168	678	SupplierStandard	12.85
01.G28VP8360G	36	1,960	Galvanized	sS	1,168	678	SupplierStandard	12.85
01.B18VP8360G	36	1,960	Bright	zZ	1,168	678	SupplierStandard	12.85
01.B23VP8360G	36	1,960	Bright	zS	1,168	678	SupplierStandard	12.85
01.B13VP8360G	36	1,960	Bright	sZ	1,168	678	SupplierStandard	12.85
01.B28VP8360G	36	1,960	Bright	sS	1,168	678	SupplierStandard	12.85
01.G18VP8360H	36	2,160	Galvanized	zZ	1,227	678	SupplierStandard	12.85
01.G23VP8360H	36	2,160	Galvanized	zS	1,227	678	SupplierStandard	12.85
01.G13VP8360H	36	2,160	Galvanized	sZ	1,227	678	SupplierStandard	12.85
01.G28VP8360H	36	2,160	Galvanized	sS	1,227	678	SupplierStandard	12.85
01.B18VP8360H	36	2,160	Bright	zZ	1,227	678	SupplierStandard	12.85
01.B23VP8360H	36	2,160	Bright	zS	1,227	678	SupplierStandard	12.85
01.B13VP8360H	36	2,160	Bright	sZ	1,227	678	SupplierStandard	12.85
01.B28VP8360H	36	2,160	Bright	sS	1,227	678	SupplierStandard	12.85
01.G18VP8380E	38	1,770	Galvanized	zZ	1,177	755	SupplierStandard	14.32
01.G23VP8380E	38	1,770	Galvanized	zS	1,177	755	SupplierStandard	14.32
01.G13VP8380E	38	1,770	Galvanized	sZ	1,177	755	SupplierStandard	14.32
01.G28VP8380E	38	1,770	Galvanized	sS	1,177	755	SupplierStandard	14.32
01.B18VP8380E	38	1,770	Bright	zZ	1,177	755	SupplierStandard	14.32
01.B23VP8380E	38	1,770	Bright	zS	1,177	755	SupplierStandard	14.32
01.B13VP8380E	38	1,770	Bright	sZ	1,177	755	SupplierStandard	14.32
01.B28VP8380E	38	1,770	Bright	sS	1,177	755	SupplierStandard	14.32



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G18VP8380G	38	1,960	Galvanized	zZ	1,301	755	SupplierStandard	14.32
01.G23VP8380G	38	1,960	Galvanized	zS	1,301	755	SupplierStandard	14.32
01.G13VP8380G	38	1,960	Galvanized	sZ	1,301	755	SupplierStandard	14.32
01.G28VP8380G	38	1,960	Galvanized	sS	1,301	755	SupplierStandard	14.32
01.B18VP8380G	38	1,960	Bright	zZ	1,301	755	SupplierStandard	14.32
01.B23VP8380G	38	1,960	Bright	zS	1,301	755	SupplierStandard	14.32
01.B13VP8380G	38	1,960	Bright	sZ	1,301	755	SupplierStandard	14.32
01.B28VP8380G	38	1,960	Bright	sS	1,301	755	SupplierStandard	14.32
01.G18VP8380H	38	2,160	Galvanized	zZ	1,367	755	SupplierStandard	14.32
01.G23VP8380H	38	2,160	Galvanized	zS	1,367	755	SupplierStandard	14.32
01.G13VP8380H	38	2,160	Galvanized	sZ	1,367	755	SupplierStandard	14.32
01.G28VP8380H	38	2,160	Galvanized	sS	1,367	755	SupplierStandard	14.32
01.B18VP8380H	38	2,160	Bright	zZ	1,367	755	SupplierStandard	14.32
01.B23VP8380H	38	2,160	Bright	zS	1,367	755	SupplierStandard	14.32
01.B13VP8380H	38	2,160	Bright	sZ	1,367	755	SupplierStandard	14.32
01.B28VP8380H	38	2,160	Bright	sS	1,367	755	SupplierStandard	14.32
01.G18VP8400E	40	1,770	Galvanized	zZ	1,304	837	SupplierStandard	15.87
01.G23VP8400E	40	1,770	Galvanized	zS	1,304	837	SupplierStandard	15.87
01.G13VP8400E	40	1,770	Galvanized	sZ	1,304	837	SupplierStandard	15.87
01.G28VP8400E	40	1,770	Galvanized	sS	1,304	837	SupplierStandard	15.87
01.B18VP8400E	40	1,770	Bright	zZ	1,304	837	SupplierStandard	15.87
01.B23VP8400E	40	1,770	Bright	zS	1,304	837	SupplierStandard	15.87
01.B13VP8400E	40	1,770	Bright	sZ	1,304	837	SupplierStandard	15.87
01.B28VP8400E	40	1,770	Bright	sS	1,304	837	SupplierStandard	15.87
01.G18VP8400G	40	1,960	Galvanized	zZ	1,442	837	SupplierStandard	15.87
01.G23VP8400G	40	1,960	Galvanized	zS	1,442	837	SupplierStandard	15.87
01.G13VP8400G	40	1,960	Galvanized	sZ	1,442	837	SupplierStandard	15.87
01.G28VP8400G	40	1,960	Galvanized	sS	1,442	837	SupplierStandard	15.87
01.B18VP8400G	40	1,960	Bright	zZ	1,442	837	SupplierStandard	15.87
01.B23VP8400G	40	1,960	Bright	zS	1,442	837	SupplierStandard	15.87
01.B13VP8400G	40	1,960	Bright	sZ	1,442	837	SupplierStandard	15.87



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B28VP8400G	40	1,960	Bright	sS	1,442	837	SupplierStandard	15.87
01.G18VP8400H	40	2,160	Galvanized	zZ	1,515	837	SupplierStandard	15.87
01.G23VP8400H	40	2,160	Galvanized	zS	1,515	837	SupplierStandard	15.87
01.G13VP8400H	40	2,160	Galvanized	sZ	1,515	837	SupplierStandard	15.87
01.G28VP8400H	40	2,160	Galvanized	sS	1,515	837	SupplierStandard	15.87
01.B18VP8400H	40	2,160	Bright	zZ	1,515	837	SupplierStandard	15.87
01.B23VP8400H	40	2,160	Bright	zS	1,515	837	SupplierStandard	15.87
01.B13VP8400H	40	2,160	Bright	sZ	1,515	837	SupplierStandard	15.87
01.B28VP8400H	40	2,160	Bright	sS	1,515	837	SupplierStandard	15.87
01.G18VP8413E	41.3	1,770	Galvanized	zZ	1,390	897	SupplierStandard	16.92
01.G23VP8413E	41.3	1,770	Galvanized	zS	1,390	897	SupplierStandard	16.92
01.G13VP8413E	41.3	1,770	Galvanized	sZ	1,390	897	SupplierStandard	16.92
01.G28VP8413E	41.3	1,770	Galvanized	sS	1,390	897	SupplierStandard	16.92
01.B18VP8413E	41.3	1,770	Bright	zZ	1,390	897	SupplierStandard	16.92
01.B23VP8413E	41.3	1,770	Bright	zS	1,390	897	SupplierStandard	16.92
01.B13VP8413E	41.3	1,770	Bright	sZ	1,390	897	SupplierStandard	16.92
01.B28VP8413E	41.3	1,770	Bright	sS	1,390	897	SupplierStandard	16.92
01.G18VP8413G	41.3	1,960	Galvanized	zZ	1,537	897	SupplierStandard	16.92
01.G23VP8413G	41.3	1,960	Galvanized	zS	1,537	897	SupplierStandard	16.92
01.G13VP8413G	41.3	1,960	Galvanized	sZ	1,537	897	SupplierStandard	16.92
01.G28VP8413G	41.3	1,960	Galvanized	sS	1,537	897	SupplierStandard	16.92
01.B18VP8413G	41.3	1,960	Bright	zZ	1,537	897	SupplierStandard	16.92
01.B23VP8413G	41.3	1,960	Bright	zS	1,537	897	SupplierStandard	16.92
01.B13VP8413G	41.3	1,960	Bright	sZ	1,537	897	SupplierStandard	16.92
01.B28VP8413G	41.3	1,960	Bright	sS	1,537	897	SupplierStandard	16.92
01.G18VP8413H	41.3	2,160	Galvanized	zZ	1,615	897	SupplierStandard	16.92
01.G23VP8413H	41.3	2,160	Galvanized	zS	1,615	897	SupplierStandard	16.92
01.G13VP8413H	41.3	2,160	Galvanized	sZ	1,615	897	SupplierStandard	16.92
01.G28VP8413H	41.3	2,160	Galvanized	sS	1,615	897	SupplierStandard	16.92
01.B18VP8413H	41.3	2,160	Bright	zZ	1,615	897	SupplierStandard	16.92
01.B23VP8413H	41.3	2,160	Bright	zS	1,615	897	SupplierStandard	16.92



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B13VP8413H	41.3	2,160	Bright	sZ	1,615	897	SupplierStandard	16.92
01.B28VP8413H	41.3	2,160	Bright	sS	1,615	897	SupplierStandard	16.92
01.G18VP8420E	42	1,770	Galvanized	zZ	1,437	923	SupplierStandard	17.49
01.G23VP8420E	42	1,770	Galvanized	zS	1,437	923	SupplierStandard	17.49
01.G13VP8420E	42	1,770	Galvanized	sZ	1,437	923	SupplierStandard	17.49
01.G28VP8420E	42	1,770	Galvanized	sS	1,437	923	SupplierStandard	17.49
01.B18VP8420E	42	1,770	Bright	zZ	1,437	923	SupplierStandard	17.49
01.B23VP8420E	42	1,770	Bright	zS	1,437	923	SupplierStandard	17.49
01.B13VP8420E	42	1,770	Bright	sZ	1,437	923	SupplierStandard	17.49
01.B28VP8420E	42	1,770	Bright	sS	1,437	923	SupplierStandard	17.49
01.G18VP8420G	42	1,960	Galvanized	zZ	1,590	923	SupplierStandard	17.49
01.G23VP8420G	42	1,960	Galvanized	zS	1,590	923	SupplierStandard	17.49
01.G13VP8420G	42	1,960	Galvanized	sZ	1,590	923	SupplierStandard	17.49
01.G28VP8420G	42	1,960	Galvanized	sS	1,590	923	SupplierStandard	17.49
01.B18VP8420G	42	1,960	Bright	zZ	1,590	923	SupplierStandard	17.49
01.B23VP8420G	42	1,960	Bright	zS	1,590	923	SupplierStandard	17.49
01.B13VP8420G	42	1,960	Bright	sZ	1,590	923	SupplierStandard	17.49
01.B28VP8420G	42	1,960	Bright	sS	1,590	923	SupplierStandard	17.49
01.G18VP8420H	42	2,160	Galvanized	zZ	1,670	923	SupplierStandard	17.49
01.G23VP8420H	42	2,160	Galvanized	zS	1,670	923	SupplierStandard	17.49
01.G13VP8420H	42	2,160	Galvanized	sZ	1,670	923	SupplierStandard	17.49
01.G28VP8420H	42	2,160	Galvanized	sS	1,670	923	SupplierStandard	17.49
01.B18VP8420H	42	2,160	Bright	zZ	1,670	923	SupplierStandard	17.49
01.B23VP8420H	42	2,160	Bright	zS	1,670	923	SupplierStandard	17.49
01.B13VP8420H	42	2,160	Bright	sZ	1,670	923	SupplierStandard	17.49
01.B28VP8420H	42	2,160	Bright	sS	1,670	923	SupplierStandard	17.49
01.G18VP8440E	44	1,770	Galvanized	zZ	1,578	1,013	SupplierStandard	19.2
01.G23VP8440E	44	1,770	Galvanized	zS	1,578	1,013	SupplierStandard	19.2
01.G13VP8440E	44	1,770	Galvanized	sZ	1,578	1,013	SupplierStandard	19.2
01.G28VP8440E	44	1,770	Galvanized	sS	1,578	1,013	SupplierStandard	19.2
01.B18VP8440E	44	1,770	Bright	zZ	1,578	1,013	SupplierStandard	19.2



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B23VP8440E	44	1,770	Bright	zS	1,578	1,013	SupplierStandard	19.2
01.B13VP8440E	44	1,770	Bright	sZ	1,578	1,013	SupplierStandard	19.2
01.B28VP8440E	44	1,770	Bright	sS	1,578	1,013	SupplierStandard	19.2
01.G18VP8440G	44	1,960	Galvanized	zZ	1,745	1,013	SupplierStandard	19.2
01.G23VP8440G	44	1,960	Galvanized	zS	1,745	1,013	SupplierStandard	19.2
01.G13VP8440G	44	1,960	Galvanized	sZ	1,745	1,013	SupplierStandard	19.2
01.G28VP8440G	44	1,960	Galvanized	sS	1,745	1,013	SupplierStandard	19.2
01.B18VP8440G	44	1,960	Bright	zZ	1,745	1,013	SupplierStandard	19.2
01.B23VP8440G	44	1,960	Bright	zS	1,745	1,013	SupplierStandard	19.2
01.B13VP8440G	44	1,960	Bright	sZ	1,745	1,013	SupplierStandard	19.2
01.B28VP8440G	44	1,960	Bright	sS	1,745	1,013	SupplierStandard	19.2
01.G18VP8440H	44	2,160	Galvanized	zZ	1,833	1,013	SupplierStandard	19.2
01.G23VP8440H	44	2,160	Galvanized	zS	1,833	1,013	SupplierStandard	19.2
01.G13VP8440H	44	2,160	Galvanized	sZ	1,833	1,013	SupplierStandard	19.2
01.G28VP8440H	44	2,160	Galvanized	sS	1,833	1,013	SupplierStandard	19.2
01.B18VP8440H	44	2,160	Bright	zZ	1,833	1,013	SupplierStandard	19.2
01.B23VP8440H	44	2,160	Bright	zS	1,833	1,013	SupplierStandard	19.2
01.B13VP8440H	44	2,160	Bright	sZ	1,833	1,013	SupplierStandard	19.2
01.B28VP8440H	44	2,160	Bright	sS	1,833	1,013	SupplierStandard	19.2
01.G18VP8450E	45	1,770	Galvanized	zZ	1,650	1,059	SupplierStandard	20.08
01.G23VP8450E	45	1,770	Galvanized	zS	1,650	1,059	SupplierStandard	20.08
01.G13VP8450E	45	1,770	Galvanized	sZ	1,650	1,059	SupplierStandard	20.08
01.G28VP8450E	45	1,770	Galvanized	sS	1,650	1,059	SupplierStandard	20.08
01.B18VP8450E	45	1,770	Bright	zZ	1,650	1,059	SupplierStandard	20.08
01.B23VP8450E	45	1,770	Bright	zS	1,650	1,059	SupplierStandard	20.08
01.B13VP8450E	45	1,770	Bright	sZ	1,650	1,059	SupplierStandard	20.08
01.B28VP8450E	45	1,770	Bright	sS	1,650	1,059	SupplierStandard	20.08
01.G18VP8450G	45	1,960	Galvanized	zZ	1,825	1,059	SupplierStandard	20.08
01.G23VP8450G	45	1,960	Galvanized	zS	1,825	1,059	SupplierStandard	20.08
01.G13VP8450G	45	1,960	Galvanized	sZ	1,825	1,059	SupplierStandard	20.08
01.G28VP8450G	45	1,960	Galvanized	sS	1,825	1,059	SupplierStandard	20.08



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B18VP8450G	45	1,960	Bright	zZ	1,825	1,059	SupplierStandard	20.08
01.B23VP8450G	45	1,960	Bright	zS	1,825	1,059	SupplierStandard	20.08
01.B13VP8450G	45	1,960	Bright	sZ	1,825	1,059	SupplierStandard	20.08
01.B28VP8450G	45	1,960	Bright	sS	1,825	1,059	SupplierStandard	20.08
01.G18VP8450H	45	2,160	Galvanized	zZ	1,917	1,059	SupplierStandard	20.08
01.G23VP8450H	45	2,160	Galvanized	zS	1,917	1,059	SupplierStandard	20.08
01.G13VP8450H	45	2,160	Galvanized	sZ	1,917	1,059	SupplierStandard	20.08
01.G28VP8450H	45	2,160	Galvanized	sS	1,917	1,059	SupplierStandard	20.08
01.B18VP8450H	45	2,160	Bright	zZ	1,917	1,059	SupplierStandard	20.08
01.B23VP8450H	45	2,160	Bright	zS	1,917	1,059	SupplierStandard	20.08
01.B13VP8450H	45	2,160	Bright	sZ	1,917	1,059	SupplierStandard	20.08
01.B28VP8450H	45	2,160	Bright	sS	1,917	1,059	SupplierStandard	20.08
01.G18VP8460E	46	1,770	Galvanized	zZ	1,724	1,107	SupplierStandard	20.99
01.G23VP8460E	46	1,770	Galvanized	zS	1,724	1,107	SupplierStandard	20.99
01.G13VP8460E	46	1,770	Galvanized	sZ	1,724	1,107	SupplierStandard	20.99
01.G28VP8460E	46	1,770	Galvanized	sS	1,724	1,107	SupplierStandard	20.99
01.B18VP8460E	46	1,770	Bright	zZ	1,724	1,107	SupplierStandard	20.99
01.B23VP8460E	46	1,770	Bright	zS	1,724	1,107	SupplierStandard	20.99
01.B13VP8460E	46	1,770	Bright	sZ	1,724	1,107	SupplierStandard	20.99
01.B28VP8460E	46	1,770	Bright	sS	1,724	1,107	SupplierStandard	20.99
01.G18VP8460G	46	1,960	Galvanized	zZ	1,907	1,107	SupplierStandard	20.99
01.G23VP8460G	46	1,960	Galvanized	zS	1,907	1,107	SupplierStandard	20.99
01.G13VP8460G	46	1,960	Galvanized	sZ	1,907	1,107	SupplierStandard	20.99
01.G28VP8460G	46	1,960	Galvanized	sS	1,907	1,107	SupplierStandard	20.99
01.B18VP8460G	46	1,960	Bright	zZ	1,907	1,107	SupplierStandard	20.99
01.B23VP8460G	46	1,960	Bright	zS	1,907	1,107	SupplierStandard	20.99
01.B13VP8460G	46	1,960	Bright	sZ	1,907	1,107	SupplierStandard	20.99
01.B28VP8460G	46	1,960	Bright	sS	1,907	1,107	SupplierStandard	20.99
01.G18VP8460H	46	2,160	Galvanized	zZ	2,003	1,107	SupplierStandard	20.99
01.G23VP8460H	46	2,160	Galvanized	zS	2,003	1,107	SupplierStandard	20.99
01.G13VP8460H	46	2,160	Galvanized	sZ	2,003	1,107	SupplierStandard	20.99



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G28VP8460H	46	2,160	Galvanized	sS	2,003	1,107	SupplierStandard	20.99
01.B18VP8460H	46	2,160	Bright	zZ	2,003	1,107	SupplierStandard	20.99
01.B23VP8460H	46	2,160	Bright	zS	2,003	1,107	SupplierStandard	20.99
01.B13VP8460H	46	2,160	Bright	sZ	2,003	1,107	SupplierStandard	20.99
01.B28VP8460H	46	2,160	Bright	sS	2,003	1,107	SupplierStandard	20.99
01.G18VP8475E	47.5	1,770	Galvanized	zZ	1,838	1,187	SupplierStandard	22.38
01.G23VP8475E	47.5	1,770	Galvanized	zS	1,838	1,187	SupplierStandard	22.38
01.G13VP8475E	47.5	1,770	Galvanized	sZ	1,838	1,187	SupplierStandard	22.38
01.G28VP8475E	47.5	1,770	Galvanized	sS	1,838	1,187	SupplierStandard	22.38
01.B18VP8475E	47.5	1,770	Bright	zZ	1,838	1,187	SupplierStandard	22.38
01.B23VP8475E	47.5	1,770	Bright	zS	1,838	1,187	SupplierStandard	22.38
01.B13VP8475E	47.5	1,770	Bright	sZ	1,838	1,187	SupplierStandard	22.38
01.B28VP8475E	47.5	1,770	Bright	sS	1,838	1,187	SupplierStandard	22.38
01.G18VP8475G	47.5	1,960	Galvanized	zZ	2,034	1,187	SupplierStandard	22.38
01.G23VP8475G	47.5	1,960	Galvanized	zS	2,034	1,187	SupplierStandard	22.38
01.G13VP8475G	47.5	1,960	Galvanized	sZ	2,034	1,187	SupplierStandard	22.38
01.G28VP8475G	47.5	1,960	Galvanized	sS	2,034	1,187	SupplierStandard	22.38
01.B18VP8475G	47.5	1,960	Bright	zZ	2,034	1,187	SupplierStandard	22.38
01.B23VP8475G	47.5	1,960	Bright	zS	2,034	1,187	SupplierStandard	22.38
01.B13VP8475G	47.5	1,960	Bright	sZ	2,034	1,187	SupplierStandard	22.38
01.B28VP8475G	47.5	1,960	Bright	sS	2,034	1,187	SupplierStandard	22.38
01.G18VP8475H	47.5	2,160	Galvanized	zZ	2,136	1,187	SupplierStandard	22.38
01.G23VP8475H	47.5	2,160	Galvanized	zS	2,136	1,187	SupplierStandard	22.38
01.G13VP8475H	47.5	2,160	Galvanized	sZ	2,136	1,187	SupplierStandard	22.38
01.G28VP8475H	47.5	2,160	Galvanized	sS	2,136	1,187	SupplierStandard	22.38
01.B18VP8475H	47.5	2,160	Bright	zZ	2,136	1,187	SupplierStandard	22.38
01.B23VP8475H	47.5	2,160	Bright	zS	2,136	1,187	SupplierStandard	22.38
01.B13VP8475H	47.5	2,160	Bright	sZ	2,136	1,187	SupplierStandard	22.38
01.B28VP8475H	47.5	2,160	Bright	sS	2,136	1,187	SupplierStandard	22.38
01.G18VP8480E	48	1,770	Galvanized	zZ	1,877	1,205	SupplierStandard	22.85
01.G23VP8480E	48	1,770	Galvanized	zS	1,877	1,205	SupplierStandard	22.85



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G13VP8480E	48	1,770	Galvanized	sZ	1,877	1,205	SupplierStandard	22.85
01.G28VP8480E	48	1,770	Galvanized	sS	1,877	1,205	SupplierStandard	22.85
01.B18VP8480E	48	1,770	Bright	zZ	1,877	1,205	SupplierStandard	22.85
01.B23VP8480E	48	1,770	Bright	zS	1,877	1,205	SupplierStandard	22.85
01.B13VP8480E	48	1,770	Bright	sZ	1,877	1,205	SupplierStandard	22.85
01.B28VP8480E	48	1,770	Bright	sS	1,877	1,205	SupplierStandard	22.85
01.G18VP8480G	48	1,960	Galvanized	zZ	2,077	1,205	SupplierStandard	22.85
01.G23VP8480G	48	1,960	Galvanized	zS	2,077	1,205	SupplierStandard	22.85
01.G13VP8480G	48	1,960	Galvanized	sZ	2,077	1,205	SupplierStandard	22.85
01.G28VP8480G	48	1,960	Galvanized	sS	2,077	1,205	SupplierStandard	22.85
01.B18VP8480G	48	1,960	Bright	zZ	2,077	1,205	SupplierStandard	22.85
01.B23VP8480G	48	1,960	Bright	zS	2,077	1,205	SupplierStandard	22.85
01.B13VP8480G	48	1,960	Bright	sZ	2,077	1,205	SupplierStandard	22.85
01.B28VP8480G	48	1,960	Bright	sS	2,077	1,205	SupplierStandard	22.85
01.G18VP8480H	48	2,160	Galvanized	zZ	2,181	1,205	SupplierStandard	22.85
01.G23VP8480H	48	2,160	Galvanized	zS	2,181	1,205	SupplierStandard	22.85
01.G13VP8480H	48	2,160	Galvanized	sZ	2,181	1,205	SupplierStandard	22.85
01.G28VP8480H	48	2,160	Galvanized	sS	2,181	1,205	SupplierStandard	22.85
01.B18VP8480H	48	2,160	Bright	zZ	2,181	1,205	SupplierStandard	22.85
01.B23VP8480H	48	2,160	Bright	zS	2,181	1,205	SupplierStandard	22.85
01.B13VP8480H	48	2,160	Bright	sZ	2,181	1,205	SupplierStandard	22.85
01.B28VP8480H	48	2,160	Bright	sS	2,181	1,205	SupplierStandard	22.85
01.G18VP8500E	50	1,770	Galvanized	zZ	2,037	1,308	SupplierStandard	24.79
01.G23VP8500E	50	1,770	Galvanized	zS	2,037	1,308	SupplierStandard	24.79
01.G13VP8500E	50	1,770	Galvanized	sZ	2,037	1,308	SupplierStandard	24.79
01.G28VP8500E	50	1,770	Galvanized	sS	2,037	1,308	SupplierStandard	24.79
01.B18VP8500E	50	1,770	Bright	zZ	2,037	1,308	SupplierStandard	24.79
01.B23VP8500E	50	1,770	Bright	zS	2,037	1,308	SupplierStandard	24.79
01.B13VP8500E	50	1,770	Bright	sZ	2,037	1,308	SupplierStandard	24.79
01.B28VP8500E	50	1,770	Bright	sS	2,037	1,308	SupplierStandard	24.79
01.G18VP8500G	50	1,960	Galvanized	zZ	2,253	1,308	SupplierStandard	24.79



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G23VP8500G	50	1,960	Galvanized	zS	2,253	1,308	SupplierStandard	24.79
01.G13VP8500G	50	1,960	Galvanized	sZ	2,253	1,308	SupplierStandard	24.79
01.G28VP8500G	50	1,960	Galvanized	sS	2,253	1,308	SupplierStandard	24.79
01.B18VP8500G	50	1,960	Bright	zZ	2,253	1,308	SupplierStandard	24.79
01.B23VP8500G	50	1,960	Bright	zS	2,253	1,308	SupplierStandard	24.79
01.B13VP8500G	50	1,960	Bright	sZ	2,253	1,308	SupplierStandard	24.79
01.B28VP8500G	50	1,960	Bright	sS	2,253	1,308	SupplierStandard	24.79
01.G18VP8500H	50	2,160	Galvanized	zZ	2,367	1,308	SupplierStandard	24.79
01.G23VP8500H	50	2,160	Galvanized	zS	2,367	1,308	SupplierStandard	24.79
01.G13VP8500H	50	2,160	Galvanized	sZ	2,367	1,308	SupplierStandard	24.79
01.G28VP8500H	50	2,160	Galvanized	sS	2,367	1,308	SupplierStandard	24.79
01.B18VP8500H	50	2,160	Bright	zZ	2,367	1,308	SupplierStandard	24.79
01.B23VP8500H	50	2,160	Bright	zS	2,367	1,308	SupplierStandard	24.79
01.B13VP8500H	50	2,160	Bright	sZ	2,367	1,308	SupplierStandard	24.79
01.B28VP8500H	50	2,160	Bright	sS	2,367	1,308	SupplierStandard	24.79
01.G18VP8520E	52	1,770	Galvanized	zZ	2,203	1,414	SupplierStandard	26.82
01.G23VP8520E	52	1,770	Galvanized	zS	2,203	1,414	SupplierStandard	26.82
01.G13VP8520E	52	1,770	Galvanized	sZ	2,203	1,414	SupplierStandard	26.82
01.G28VP8520E	52	1,770	Galvanized	sS	2,203	1,414	SupplierStandard	26.82
01.B18VP8520E	52	1,770	Bright	zZ	2,203	1,414	SupplierStandard	26.82
01.B23VP8520E	52	1,770	Bright	zS	2,203	1,414	SupplierStandard	26.82
01.B13VP8520E	52	1,770	Bright	sZ	2,203	1,414	SupplierStandard	26.82
01.B28VP8520E	52	1,770	Bright	sS	2,203	1,414	SupplierStandard	26.82
01.G18VP8520G	52	1,960	Galvanized	zZ	2,437	1,414	SupplierStandard	26.82
01.G23VP8520G	52	1,960	Galvanized	zS	2,437	1,414	SupplierStandard	26.82
01.G13VP8520G	52	1,960	Galvanized	sZ	2,437	1,414	SupplierStandard	26.82
01.G28VP8520G	52	1,960	Galvanized	sS	2,437	1,414	SupplierStandard	26.82
01.B18VP8520G	52	1,960	Bright	zZ	2,437	1,414	SupplierStandard	26.82
01.B23VP8520G	52	1,960	Bright	zS	2,437	1,414	SupplierStandard	26.82
01.B13VP8520G	52	1,960	Bright	sZ	2,437	1,414	SupplierStandard	26.82
01.B28VP8520G	52	1,960	Bright	sS	2,437	1,414	SupplierStandard	26.82



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.G18VP8520H	52	2,160	Galvanized	zZ	2,560	1,414	SupplierStandard	26.82
01.G23VP8520H	52	2,160	Galvanized	zS	2,560	1,414	SupplierStandard	26.82
01.G13VP8520H	52	2,160	Galvanized	sZ	2,560	1,414	SupplierStandard	26.82
01.G28VP8520H	52	2,160	Galvanized	sS	2,560	1,414	SupplierStandard	26.82
01.B18VP8520H	52	2,160	Bright	zZ	2,560	1,414	SupplierStandard	26.82
01.B23VP8520H	52	2,160	Bright	zS	2,560	1,414	SupplierStandard	26.82
01.B13VP8520H	52	2,160	Bright	sZ	2,560	1,414	SupplierStandard	26.82
01.B28VP8520H	52	2,160	Bright	sS	2,560	1,414	SupplierStandard	26.82
01.G18VP8540E	54	1,770	Galvanized	zZ	2,376	1,525	SupplierStandard	28.92
01.G23VP8540E	54	1,770	Galvanized	zS	2,376	1,525	SupplierStandard	28.92
01.G13VP8540E	54	1,770	Galvanized	sZ	2,376	1,525	SupplierStandard	28.92
01.G28VP8540E	54	1,770	Galvanized	sS	2,376	1,525	SupplierStandard	28.92
01.B18VP8540E	54	1,770	Bright	zZ	2,376	1,525	SupplierStandard	28.92
01.B23VP8540E	54	1,770	Bright	zS	2,376	1,525	SupplierStandard	28.92
01.B13VP8540E	54	1,770	Bright	sZ	2,376	1,525	SupplierStandard	28.92
01.B28VP8540E	54	1,770	Bright	sS	2,376	1,525	SupplierStandard	28.92
01.G18VP8540G	54	1,960	Galvanized	zZ	2,628	1,525	SupplierStandard	28.92
01.G23VP8540G	54	1,960	Galvanized	zS	2,628	1,525	SupplierStandard	28.92
01.G13VP8540G	54	1,960	Galvanized	sZ	2,628	1,525	SupplierStandard	28.92
01.G28VP8540G	54	1,960	Galvanized	sS	2,628	1,525	SupplierStandard	28.92
01.B18VP8540G	54	1,960	Bright	zZ	2,628	1,525	SupplierStandard	28.92
01.B23VP8540G	54	1,960	Bright	zS	2,628	1,525	SupplierStandard	28.92
01.B13VP8540G	54	1,960	Bright	sZ	2,628	1,525	SupplierStandard	28.92
01.B28VP8540G	54	1,960	Bright	sS	2,628	1,525	SupplierStandard	28.92
01.G18VP8540H	54	2,160	Galvanized	zZ	2,761	1,525	SupplierStandard	28.92
01.G23VP8540H	54	2,160	Galvanized	zS	2,761	1,525	SupplierStandard	28.92
01.G13VP8540H	54	2,160	Galvanized	sZ	2,761	1,525	SupplierStandard	28.92
01.G28VP8540H	54	2,160	Galvanized	sS	2,761	1,525	SupplierStandard	28.92
01.B18VP8540H	54	2,160	Bright	zZ	2,761	1,525	SupplierStandard	28.92
01.B23VP8540H	54	2,160	Bright	zS	2,761	1,525	SupplierStandard	28.92
01.B13VP8540H	54	2,160	Bright	sZ	2,761	1,525	SupplierStandard	28.92



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B28VP8540H	54	2,160	Bright	sS	2,761	1,525	SupplierStandard	28.92
01.G18VP8560E	56	1,770	Galvanized	zZ	2,555	1,640	SupplierStandard	31.1
01.G23VP8560E	56	1,770	Galvanized	zS	2,555	1,640	SupplierStandard	31.1
01.G13VP8560E	56	1,770	Galvanized	sZ	2,555	1,640	SupplierStandard	31.1
01.G28VP8560E	56	1,770	Galvanized	sS	2,555	1,640	SupplierStandard	31.1
01.B18VP8560E	56	1,770	Bright	zZ	2,555	1,640	SupplierStandard	31.1
01.B23VP8560E	56	1,770	Bright	zS	2,555	1,640	SupplierStandard	31.1
01.B13VP8560E	56	1,770	Bright	sZ	2,555	1,640	SupplierStandard	31.1
01.B28VP8560E	56	1,770	Bright	sS	2,555	1,640	SupplierStandard	31.1
01.G18VP8560G	56	1,960	Galvanized	zZ	2,826	1,640	SupplierStandard	31.1
01.G23VP8560G	56	1,960	Galvanized	zS	2,826	1,640	SupplierStandard	31.1
01.G13VP8560G	56	1,960	Galvanized	sZ	2,826	1,640	SupplierStandard	31.1
01.G28VP8560G	56	1,960	Galvanized	sS	2,826	1,640	SupplierStandard	31.1
01.B18VP8560G	56	1,960	Bright	zZ	2,826	1,640	SupplierStandard	31.1
01.B23VP8560G	56	1,960	Bright	zS	2,826	1,640	SupplierStandard	31.1
01.B13VP8560G	56	1,960	Bright	sZ	2,826	1,640	SupplierStandard	31.1
01.B28VP8560G	56	1,960	Bright	sS	2,826	1,640	SupplierStandard	31.1
01.G18VP8580E	58	1,770	Galvanized	zZ	2,741	1,760	SupplierStandard	33.36
01.G23VP8580E	58	1,770	Galvanized	zS	2,741	1,760	SupplierStandard	33.36
01.G13VP8580E	58	1,770	Galvanized	sZ	2,741	1,760	SupplierStandard	33.36
01.G28VP8580E	58	1,770	Galvanized	sS	2,741	1,760	SupplierStandard	33.36
01.B18VP8580E	58	1,770	Bright	zZ	2,741	1,760	SupplierStandard	33.36
01.B23VP8580E	58	1,770	Bright	zS	2,741	1,760	SupplierStandard	33.36
01.B13VP8580E	58	1,770	Bright	sZ	2,741	1,760	SupplierStandard	33.36
01.B28VP8580E	58	1,770	Bright	sS	2,741	1,760	SupplierStandard	33.36
01.G18VP8580G	58	1,960	Galvanized	zZ	3,032	1,760	SupplierStandard	33.36
01.G23VP8580G	58	1,960	Galvanized	zS	3,032	1,760	SupplierStandard	33.36
01.G13VP8580G	58	1,960	Galvanized	sZ	3,032	1,760	SupplierStandard	33.36
01.G28VP8580G	58	1,960	Galvanized	sS	3,032	1,760	SupplierStandard	33.36
01.B18VP8580G	58	1,960	Bright	zZ	3,032	1,760	SupplierStandard	33.36
01.B23VP8580G	58	1,960	Bright	zS	3,032	1,760	SupplierStandard	33.36



Verope Steel Wire Rope Veropro 8

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight lb
01.B13VP8580G	58	1,960	Bright	sZ	3,032	1,760	SupplierStandard	33.36
01.B28VP8580G	58	1,960	Bright	sS	3,032	1,760	SupplierStandard	33.36
01.G18VP8600E	60	1,770	Galvanized	zZ	2,933	1,883	SupplierStandard	35.7
01.G23VP8600E	60	1,770	Galvanized	zS	2,933	1,883	SupplierStandard	35.7
01.G13VP8600E	60	1,770	Galvanized	sZ	2,933	1,883	SupplierStandard	35.7
01.G28VP8600E	60	1,770	Galvanized	sS	2,933	1,883	SupplierStandard	35.7
01.B18VP8600E	60	1,770	Bright	zZ	2,933	1,883	SupplierStandard	35.7
01.B23VP8600E	60	1,770	Bright	zS	2,933	1,883	SupplierStandard	35.7
01.B13VP8600E	60	1,770	Bright	sZ	2,933	1,883	SupplierStandard	35.7
01.B28VP8600E	60	1,770	Bright	sS	2,933	1,883	SupplierStandard	35.7
01.G18VP8600G	60	1,960	Galvanized	zZ	3,245	1,883	SupplierStandard	35.7
01.G23VP8600G	60	1,960	Galvanized	zS	3,245	1,883	SupplierStandard	35.7
01.G13VP8600G	60	1,960	Galvanized	sZ	3,245	1,883	SupplierStandard	35.7
01.G28VP8600G	60	1,960	Galvanized	sS	3,245	1,883	SupplierStandard	35.7
01.B18VP8600G	60	1,960	Bright	zZ	3,245	1,883	SupplierStandard	35.7
01.B23VP8600G	60	1,960	Bright	zS	3,245	1,883	SupplierStandard	35.7
01.B13VP8600G	60	1,960	Bright	sZ	3,245	1,883	SupplierStandard	35.7
01.B28VP8600G	60	1,960	Bright	sS	3,245	1,883	SupplierStandard	35.7