




## Verope Steel Wire Rope Verotop P

### Product information

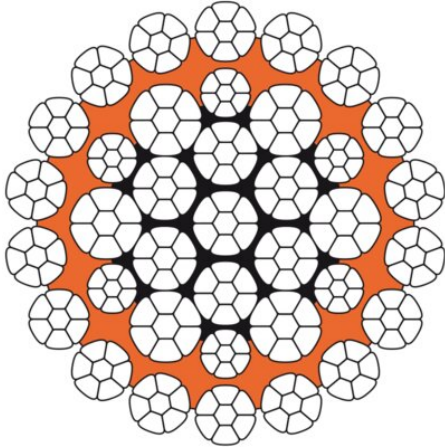

**Wire rope construction:** Verotop P is a rotation-resistant rope with compacted strands and a rope core covered with a plastic layer.

#### Features:

- Very high breaking strength.
- Provides a very stable rope structure and achieves excellent bending fatigue results.
- Offers excellent crushing and very good abrasion resistance.
- Possesses perfect spooling behavior on multilayer drum.

**ISO 4309 Rope Category No:** All Diameters **RCN.23-3.**

... [Read more](#)

Offshore crane



Piling crane



Mobile port crane



**Marking:** According to standard

**Standard:** EN 12385-4

**Note:** verotop P can be used either with or without swivel.

**Fill factor:** 0.73

**RCN:** 23-3

**Tolerance Ø:** +2% to +4%



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G38VPP160G	16	1,960	Galvanized	zZ	241.7	147	SupplierStandard	2.76
01.B38VPP160G	16	1,960	Bright	zZ	241.7	147	SupplierStandard	2.76
01.B48VPP160G	16	1,960	Bright	sS	241.7	147	SupplierStandard	2.76
01.G48VPP160G	16	1,960	Galvanized	sS	241.7	147	SupplierStandard	2.76
01.B43VPP160G	16	1,960	Bright	zS	241.7	147	SupplierStandard	2.76
01.G43VPP160G	16	1,960	Galvanized	zS	241.7	147	SupplierStandard	2.76
01.B33VPP160G	16	1,960	Bright	sZ	241.7	147	SupplierStandard	2.76
01.G33VPP160G	16	1,960	Galvanized	sZ	241.7	147	SupplierStandard	2.76
01.G38VPP160H	16	2,160	Galvanized	zZ	252.7	147	SupplierStandard	2.76
01.B38VPP160H	16	2,160	Bright	zZ	252.7	147	SupplierStandard	2.76
01.B48VPP160H	16	2,160	Bright	sS	252.7	147	SupplierStandard	2.76
01.G48VPP160H	16	2,160	Galvanized	sS	252.7	147	SupplierStandard	2.76
01.B43VPP160H	16	2,160	Bright	zS	252.7	147	SupplierStandard	2.76
01.G43VPP160H	16	2,160	Galvanized	zS	252.7	147	SupplierStandard	2.76
01.B33VPP160H	16	2,160	Bright	sZ	252.7	147	SupplierStandard	2.76
01.G33VPP160H	16	2,160	Galvanized	sZ	252.7	147	SupplierStandard	2.76
01.G38VPP170G	17	1,960	Galvanized	zZ	272.8	166	SupplierStandard	3.11
01.B38VPP170G	17	1,960	Bright	zZ	272.8	166	SupplierStandard	3.11
01.B48VPP170G	17	1,960	Bright	sS	272.8	166	SupplierStandard	3.11
01.G48VPP170G	17	1,960	Galvanized	sS	272.8	166	SupplierStandard	3.11
01.B43VPP170G	17	1,960	Bright	zS	272.8	166	SupplierStandard	3.11
01.G43VPP170G	17	1,960	Galvanized	zS	272.8	166	SupplierStandard	3.11
01.B33VPP170G	17	1,960	Bright	sZ	272.8	166	SupplierStandard	3.11
01.G33VPP170G	17	1,960	Galvanized	sZ	272.8	166	SupplierStandard	3.11
01.G38VPP170H	17	2,160	Galvanized	zZ	285.3	166	SupplierStandard	3.11
01.B38VPP170H	17	2,160	Bright	zZ	285.3	166	SupplierStandard	3.11
01.B48VPP170H	17	2,160	Bright	sS	285.3	166	SupplierStandard	3.11
01.G48VPP170H	17	2,160	Galvanized	sS	285.3	166	SupplierStandard	3.11
01.B43VPP170H	17	2,160	Bright	zS	285.3	166	SupplierStandard	3.11
01.G43VPP170H	17	2,160	Galvanized	zS	285.3	166	SupplierStandard	3.11
01.B33VPP170H	17	2,160	Bright	sZ	285.3	166	SupplierStandard	3.11



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G33VPP170H	17	2,160	Galvanized	sZ	285.3	166	SupplierStandard	3.11
01.G38VPP180G	18	1,960	Galvanized	zZ	305.8	186	SupplierStandard	3.48
01.B38VPP180G	18	1,960	Bright	zZ	305.8	186	SupplierStandard	3.48
01.B48VPP180G	18	1,960	Bright	sS	305.8	186	SupplierStandard	3.48
01.G48VPP180G	18	1,960	Galvanized	sS	305.8	186	SupplierStandard	3.48
01.B43VPP180G	18	1,960	Bright	zS	305.8	186	SupplierStandard	3.48
01.G43VPP180G	18	1,960	Galvanized	zS	305.8	186	SupplierStandard	3.48
01.B33VPP180G	18	1,960	Bright	sZ	305.8	186	SupplierStandard	3.48
01.G33VPP180G	18	1,960	Galvanized	sZ	305.8	186	SupplierStandard	3.48
01.G38VPP180H	18	2,160	Galvanized	zZ	319.8	186	SupplierStandard	3.48
01.B38VPP180H	18	2,160	Bright	zZ	319.8	186	SupplierStandard	3.48
01.B48VPP180H	18	2,160	Bright	sS	319.8	186	SupplierStandard	3.48
01.G48VPP180H	18	2,160	Galvanized	sS	319.8	186	SupplierStandard	3.48
01.B43VPP180H	18	2,160	Bright	zS	319.8	186	SupplierStandard	3.48
01.G43VPP180H	18	2,160	Galvanized	zS	319.8	186	SupplierStandard	3.48
01.B33VPP180H	18	2,160	Bright	sZ	319.8	186	SupplierStandard	3.48
01.G33VPP180H	18	2,160	Galvanized	sZ	319.8	186	SupplierStandard	3.48
01.G38VPP190G	19	1,960	Galvanized	zZ	340.8	207	SupplierStandard	3.88
01.B38VPP190G	19	1,960	Bright	zZ	340.8	207	SupplierStandard	3.88
01.B48VPP190G	19	1,960	Bright	sS	340.8	207	SupplierStandard	3.88
01.G48VPP190G	19	1,960	Galvanized	sS	340.8	207	SupplierStandard	3.88
01.B43VPP190G	19	1,960	Bright	zS	340.8	207	SupplierStandard	3.88
01.G43VPP190G	19	1,960	Galvanized	zS	340.8	207	SupplierStandard	3.88
01.B33VPP190G	19	1,960	Bright	sZ	340.8	207	SupplierStandard	3.88
01.G33VPP190G	19	1,960	Galvanized	sZ	340.8	207	SupplierStandard	3.88
01.G38VPP190H	19	2,160	Galvanized	zZ	356.3	207	SupplierStandard	3.88
01.B38VPP190H	19	2,160	Bright	zZ	356.3	207	SupplierStandard	3.88
01.B48VPP190H	19	2,160	Bright	sS	356.3	207	SupplierStandard	3.88
01.G48VPP190H	19	2,160	Galvanized	sS	356.3	207	SupplierStandard	3.88
01.B43VPP190H	19	2,160	Bright	zS	356.3	207	SupplierStandard	3.88
01.G43VPP190H	19	2,160	Galvanized	zS	356.3	207	SupplierStandard	3.88



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B33VPP190H	19	2,160	Bright	sZ	356.3	207	SupplierStandard	3.88
01.G33VPP190H	19	2,160	Galvanized	sZ	356.3	207	SupplierStandard	3.88
01.G38VPP200G	20	1,960	Galvanized	zZ	377.6	229	SupplierStandard	4.3
01.B38VPP200G	20	1,960	Bright	zZ	377.6	229	SupplierStandard	4.3
01.B48VPP200G	20	1,960	Bright	sS	377.6	229	SupplierStandard	4.3
01.G48VPP200G	20	1,960	Galvanized	sS	377.6	229	SupplierStandard	4.3
01.B43VPP200G	20	1,960	Bright	zS	377.6	229	SupplierStandard	4.3
01.G43VPP200G	20	1,960	Galvanized	zS	377.6	229	SupplierStandard	4.3
01.B33VPP200G	20	1,960	Bright	sZ	377.6	229	SupplierStandard	4.3
01.G33VPP200G	20	1,960	Galvanized	sZ	377.6	229	SupplierStandard	4.3
01.G38VPP200H	20	2,160	Galvanized	zZ	394.8	229	SupplierStandard	4.3
01.B38VPP200H	20	2,160	Bright	zZ	394.8	229	SupplierStandard	4.3
01.B48VPP200H	20	2,160	Bright	sS	394.8	229	SupplierStandard	4.3
01.G48VPP200H	20	2,160	Galvanized	sS	394.8	229	SupplierStandard	4.3
01.B43VPP200H	20	2,160	Bright	zS	394.8	229	SupplierStandard	4.3
01.G43VPP200H	20	2,160	Galvanized	zS	394.8	229	SupplierStandard	4.3
01.B33VPP200H	20	2,160	Bright	sZ	394.8	229	SupplierStandard	4.3
01.G33VPP200H	20	2,160	Galvanized	sZ	394.8	229	SupplierStandard	4.3
01.G38VPP210G	21	1,960	Galvanized	zZ	416.3	253	SupplierStandard	4.74
01.B38VPP210G	21	1,960	Bright	zZ	416.3	253	SupplierStandard	4.74
01.B48VPP210G	21	1,960	Bright	sS	416.3	253	SupplierStandard	4.74
01.G48VPP210G	21	1,960	Galvanized	sS	416.3	253	SupplierStandard	4.74
01.B43VPP210G	21	1,960	Bright	zS	416.3	253	SupplierStandard	4.74
01.G43VPP210G	21	1,960	Galvanized	zS	416.3	253	SupplierStandard	4.74
01.B33VPP210G	21	1,960	Bright	sZ	416.3	253	SupplierStandard	4.74
01.G33VPP210G	21	1,960	Galvanized	sZ	416.3	253	SupplierStandard	4.74
01.G38VPP210H	21	2,160	Galvanized	zZ	435.3	253	SupplierStandard	4.74
01.B38VPP210H	21	2,160	Bright	zZ	435.3	253	SupplierStandard	4.74
01.B48VPP210H	21	2,160	Bright	sS	435.3	253	SupplierStandard	4.74
01.G48VPP210H	21	2,160	Galvanized	sS	435.3	253	SupplierStandard	4.74
01.B43VPP210H	21	2,160	Bright	zS	435.3	253	SupplierStandard	4.74



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G43VPP210H	21	2,160	Galvanized	zS	435.3	253	SupplierStandard	4.74
01.B33VPP210H	21	2,160	Bright	sZ	435.3	253	SupplierStandard	4.74
01.G33VPP210H	21	2,160	Galvanized	sZ	435.3	253	SupplierStandard	4.74
01.G38VPP220G	22	1,960	Galvanized	zZ	456.9	277	SupplierStandard	5.2
01.B38VPP220G	22	1,960	Bright	zZ	456.9	277	SupplierStandard	5.2
01.B48VPP220G	22	1,960	Bright	sS	456.9	277	SupplierStandard	5.2
01.G48VPP220G	22	1,960	Galvanized	sS	456.9	277	SupplierStandard	5.2
01.B43VPP220G	22	1,960	Bright	zS	456.9	277	SupplierStandard	5.2
01.G43VPP220G	22	1,960	Galvanized	zS	456.9	277	SupplierStandard	5.2
01.B33VPP220G	22	1,960	Bright	sZ	456.9	277	SupplierStandard	5.2
01.G33VPP220G	22	1,960	Galvanized	sZ	456.9	277	SupplierStandard	5.2
01.G38VPP220H	22	2,160	Galvanized	zZ	477.7	277	SupplierStandard	5.2
01.B38VPP220H	22	2,160	Bright	zZ	477.7	277	SupplierStandard	5.2
01.B48VPP220H	22	2,160	Bright	sS	477.7	277	SupplierStandard	5.2
01.G48VPP220H	22	2,160	Galvanized	sS	477.7	277	SupplierStandard	5.2
01.B43VPP220H	22	2,160	Bright	zS	477.7	277	SupplierStandard	5.2
01.G43VPP220H	22	2,160	Galvanized	zS	477.7	277	SupplierStandard	5.2
01.B33VPP220H	22	2,160	Bright	sZ	477.7	277	SupplierStandard	5.2
01.G33VPP220H	22	2,160	Galvanized	sZ	477.7	277	SupplierStandard	5.2
01.G38VPP224G	22.4	1,960	Galvanized	zZ	473.6	283	SupplierStandard	5.29
01.B38VPP224G	22.4	1,960	Bright	zZ	473.6	283	SupplierStandard	5.29
01.B48VPP224G	22.4	1,960	Bright	sS	473.6	283	SupplierStandard	5.29
01.G48VPP224G	22.4	1,960	Galvanized	sS	473.6	283	SupplierStandard	5.29
01.B43VPP224G	22.4	1,960	Bright	zS	473.6	283	SupplierStandard	5.29
01.G43VPP224G	22.4	1,960	Galvanized	zS	473.6	283	SupplierStandard	5.29
01.B33VPP224G	22.4	1,960	Bright	sZ	473.6	283	SupplierStandard	5.29
01.G33VPP224G	22.4	1,960	Galvanized	sZ	473.6	283	SupplierStandard	5.29
01.G38VPP224H	22.4	2,160	Galvanized	zZ	495.3	283	SupplierStandard	5.29
01.B38VPP224H	22.4	2,160	Bright	zZ	495.3	283	SupplierStandard	5.29
01.B48VPP224H	22.4	2,160	Bright	sS	495.3	283	SupplierStandard	5.29
01.G48VPP224H	22.4	2,160	Galvanized	sS	495.3	283	SupplierStandard	5.29



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B43VPP224H	22.4	2,160	Bright	zS	495.3	283	SupplierStandard	5.29
01.G43VPP224H	22.4	2,160	Galvanized	zS	495.3	283	SupplierStandard	5.29
01.B33VPP224H	22.4	2,160	Bright	sZ	495.3	283	SupplierStandard	5.29
01.G33VPP224H	22.4	2,160	Galvanized	sZ	495.3	283	SupplierStandard	5.29
01.G38VPP230G	23	1,960	Galvanized	zZ	499.3	303	SupplierStandard	5.69
01.B38VPP230G	23	1,960	Bright	zZ	499.3	303	SupplierStandard	5.69
01.B48VPP230G	23	1,960	Bright	sS	499.3	303	SupplierStandard	5.69
01.G48VPP230G	23	1,960	Galvanized	sS	499.3	303	SupplierStandard	5.69
01.B43VPP230G	23	1,960	Bright	zS	499.3	303	SupplierStandard	5.69
01.G43VPP230G	23	1,960	Galvanized	zS	499.3	303	SupplierStandard	5.69
01.B33VPP230G	23	1,960	Bright	sZ	499.3	303	SupplierStandard	5.69
01.G33VPP230G	23	1,960	Galvanized	sZ	499.3	303	SupplierStandard	5.69
01.G38VPP230H	23	2,160	Galvanized	zZ	522.2	303	SupplierStandard	5.69
01.B38VPP230H	23	2,160	Bright	zZ	522.2	303	SupplierStandard	5.69
01.B48VPP230H	23	2,160	Bright	sS	522.2	303	SupplierStandard	5.69
01.G48VPP230H	23	2,160	Galvanized	sS	522.2	303	SupplierStandard	5.69
01.B43VPP230H	23	2,160	Bright	zS	522.2	303	SupplierStandard	5.69
01.G43VPP230H	23	2,160	Galvanized	zS	522.2	303	SupplierStandard	5.69
01.B33VPP230H	23	2,160	Bright	sZ	522.2	303	SupplierStandard	5.69
01.G33VPP230H	23	2,160	Galvanized	sZ	522.2	303	SupplierStandard	5.69
01.G38VPP240G	24	1,960	Galvanized	zZ	543.7	330	SupplierStandard	6.19
01.B38VPP240G	24	1,960	Bright	zZ	543.7	330	SupplierStandard	6.19
01.B48VPP240G	24	1,960	Bright	sS	543.7	330	SupplierStandard	6.19
01.G48VPP240G	24	1,960	Galvanized	sS	543.7	330	SupplierStandard	6.19
01.B43VPP240G	24	1,960	Bright	zS	543.7	330	SupplierStandard	6.19
01.G43VPP240G	24	1,960	Galvanized	zS	543.7	330	SupplierStandard	6.19
01.B33VPP240G	24	1,960	Bright	sZ	543.7	330	SupplierStandard	6.19
01.G33VPP240G	24	1,960	Galvanized	sZ	543.7	330	SupplierStandard	6.19
01.G38VPP240H	24	2,160	Galvanized	zZ	568.6	330	SupplierStandard	6.19
01.B38VPP240H	24	2,160	Bright	zZ	568.6	330	SupplierStandard	6.19
01.B48VPP240H	24	2,160	Bright	sS	568.6	330	SupplierStandard	6.19



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G48VPP240H	24	2,160	Galvanized	sS	568.6	330	SupplierStandard	6.19
01.B43VPP240H	24	2,160	Bright	zS	568.6	330	SupplierStandard	6.19
01.G43VPP240H	24	2,160	Galvanized	zS	568.6	330	SupplierStandard	6.19
01.B33VPP240H	24	2,160	Bright	sZ	568.6	330	SupplierStandard	6.19
01.G33VPP240H	24	2,160	Galvanized	sZ	568.6	330	SupplierStandard	6.19
01.G38VPP250G	25	1,960	Galvanized	zZ	590	358	SupplierStandard	6.72
01.B38VPP250G	25	1,960	Bright	zZ	590	358	SupplierStandard	6.72
01.B48VPP250G	25	1,960	Bright	sS	590	358	SupplierStandard	6.72
01.G48VPP250G	25	1,960	Galvanized	sS	590	358	SupplierStandard	6.72
01.B43VPP250G	25	1,960	Bright	zS	590	358	SupplierStandard	6.72
01.G43VPP250G	25	1,960	Galvanized	zS	590	358	SupplierStandard	6.72
01.B33VPP250G	25	1,960	Bright	sZ	590	358	SupplierStandard	6.72
01.G33VPP250G	25	1,960	Galvanized	sZ	590	358	SupplierStandard	6.72
01.G38VPP250H	25	2,160	Galvanized	zZ	616.9	358	SupplierStandard	6.72
01.B38VPP250H	25	2,160	Bright	zZ	616.9	358	SupplierStandard	6.72
01.B48VPP250H	25	2,160	Bright	sS	616.9	358	SupplierStandard	6.72
01.G48VPP250H	25	2,160	Galvanized	sS	616.9	358	SupplierStandard	6.72
01.B43VPP250H	25	2,160	Bright	zS	616.9	358	SupplierStandard	6.72
01.G43VPP250H	25	2,160	Galvanized	zS	616.9	358	SupplierStandard	6.72
01.B33VPP250H	25	2,160	Bright	sZ	616.9	358	SupplierStandard	6.72
01.G33VPP250H	25	2,160	Galvanized	sZ	616.9	358	SupplierStandard	6.72
01.G38VPP254G	25.4	1,960	Galvanized	zZ	609	370	SupplierStandard	6.92
01.B38VPP254G	25.4	1,960	Bright	zZ	609	370	SupplierStandard	6.92
01.B48VPP254G	25.4	1,960	Bright	sS	609	370	SupplierStandard	6.92
01.G48VPP254G	25.4	1,960	Galvanized	sS	609	370	SupplierStandard	6.92
01.B43VPP254G	25.4	1,960	Bright	zS	609	370	SupplierStandard	6.92
01.G43VPP254G	25.4	1,960	Galvanized	zS	609	370	SupplierStandard	6.92
01.B33VPP254G	25.4	1,960	Bright	sZ	609	370	SupplierStandard	6.92
01.G33VPP254G	25.4	1,960	Galvanized	sZ	609	370	SupplierStandard	6.92
01.G38VPP254H	25.4	2,160	Galvanized	zZ	636.8	370	SupplierStandard	6.92
01.B38VPP254H	25.4	2,160	Bright	zZ	636.8	370	SupplierStandard	6.92



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B48VPP254H	25.4	2,160	Bright	sS	636.8	370	SupplierStandard	6.92
01.G48VPP254H	25.4	2,160	Galvanized	sS	636.8	370	SupplierStandard	6.92
01.B43VPP254H	25.4	2,160	Bright	zS	636.8	370	SupplierStandard	6.92
01.G43VPP254H	25.4	2,160	Galvanized	zS	636.8	370	SupplierStandard	6.92
01.B33VPP254H	25.4	2,160	Bright	sZ	636.8	370	SupplierStandard	6.92
01.G33VPP254H	25.4	2,160	Galvanized	sZ	636.8	370	SupplierStandard	6.92
01.G38VPP260G	26	1,960	Galvanized	zZ	638.1	388	SupplierStandard	7.25
01.B38VPP260G	26	1,960	Bright	zZ	638.1	388	SupplierStandard	7.25
01.B48VPP260G	26	1,960	Bright	sS	638.1	388	SupplierStandard	7.25
01.G48VPP260G	26	1,960	Galvanized	sS	638.1	388	SupplierStandard	7.25
01.B43VPP260G	26	1,960	Bright	zS	638.1	388	SupplierStandard	7.25
01.G43VPP260G	26	1,960	Galvanized	zS	638.1	388	SupplierStandard	7.25
01.B33VPP260G	26	1,960	Bright	sZ	638.1	388	SupplierStandard	7.25
01.G33VPP260G	26	1,960	Galvanized	sZ	638.1	388	SupplierStandard	7.25
01.G38VPP260H	26	2,160	Galvanized	zZ	667.3	388	SupplierStandard	7.25
01.B38VPP260H	26	2,160	Bright	zZ	667.3	388	SupplierStandard	7.25
01.B48VPP260H	26	2,160	Bright	sS	667.3	388	SupplierStandard	7.25
01.G48VPP260H	26	2,160	Galvanized	sS	667.3	388	SupplierStandard	7.25
01.B43VPP260H	26	2,160	Bright	zS	667.3	388	SupplierStandard	7.25
01.G43VPP260H	26	2,160	Galvanized	zS	667.3	388	SupplierStandard	7.25
01.B33VPP260H	26	2,160	Bright	sZ	667.3	388	SupplierStandard	7.25
01.G33VPP260H	26	2,160	Galvanized	sZ	667.3	388	SupplierStandard	7.25
01.G38VPP270G	27	1,960	Galvanized	zZ	688.1	418	SupplierStandard	7.83
01.B38VPP270G	27	1,960	Bright	zZ	688.1	418	SupplierStandard	7.83
01.B48VPP270G	27	1,960	Bright	sS	688.1	418	SupplierStandard	7.83
01.G48VPP270G	27	1,960	Galvanized	sS	688.1	418	SupplierStandard	7.83
01.B43VPP270G	27	1,960	Bright	zS	688.1	418	SupplierStandard	7.83
01.G43VPP270G	27	1,960	Galvanized	zS	688.1	418	SupplierStandard	7.83
01.B33VPP270G	27	1,960	Bright	sZ	688.1	418	SupplierStandard	7.83
01.G33VPP270G	27	1,960	Galvanized	sZ	688.1	418	SupplierStandard	7.83
01.G38VPP270H	27	2,160	Galvanized	zZ	719.6	418	SupplierStandard	7.83



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B38VPP270H	27	2,160	Bright	zZ	719.6	418	SupplierStandard	7.83
01.B48VPP270H	27	2,160	Bright	sS	719.6	418	SupplierStandard	7.83
01.G48VPP270H	27	2,160	Galvanized	sS	719.6	418	SupplierStandard	7.83
01.B43VPP270H	27	2,160	Bright	zS	719.6	418	SupplierStandard	7.83
01.G43VPP270H	27	2,160	Galvanized	zS	719.6	418	SupplierStandard	7.83
01.B33VPP270H	27	2,160	Bright	sZ	719.6	418	SupplierStandard	7.83
01.G33VPP270H	27	2,160	Galvanized	sZ	719.6	418	SupplierStandard	7.83
01.G38VPP280G	28	1,960	Galvanized	zZ	740.1	449	SupplierStandard	8.42
01.B38VPP280G	28	1,960	Bright	zZ	740.1	449	SupplierStandard	8.42
01.B48VPP280G	28	1,960	Bright	sS	740.1	449	SupplierStandard	8.42
01.G48VPP280G	28	1,960	Galvanized	sS	740.1	449	SupplierStandard	8.42
01.B43VPP280G	28	1,960	Bright	zS	740.1	449	SupplierStandard	8.42
01.G43VPP280G	28	1,960	Galvanized	zS	740.1	449	SupplierStandard	8.42
01.B33VPP280G	28	1,960	Bright	sZ	740.1	449	SupplierStandard	8.42
01.G33VPP280G	28	1,960	Galvanized	sZ	740.1	449	SupplierStandard	8.42
01.G38VPP280H	28	2,160	Galvanized	zZ	773.9	449	SupplierStandard	8.42
01.B38VPP280H	28	2,160	Bright	zZ	773.9	449	SupplierStandard	8.42
01.B48VPP280H	28	2,160	Bright	sS	773.9	449	SupplierStandard	8.42
01.G48VPP280H	28	2,160	Galvanized	sS	773.9	449	SupplierStandard	8.42
01.B43VPP280H	28	2,160	Bright	zS	773.9	449	SupplierStandard	8.42
01.G43VPP280H	28	2,160	Galvanized	zS	773.9	449	SupplierStandard	8.42
01.B33VPP280H	28	2,160	Bright	sZ	773.9	449	SupplierStandard	8.42
01.G33VPP280H	28	2,160	Galvanized	sZ	773.9	449	SupplierStandard	8.42
01.G38VPP286G	28.6	1,960	Galvanized	zZ	772.1	469	SupplierStandard	8.8
01.B38VPP286G	28.6	1,960	Bright	zZ	772.1	469	SupplierStandard	8.8
01.B48VPP286G	28.6	1,960	Bright	sS	772.1	469	SupplierStandard	8.8
01.G48VPP286G	28.6	1,960	Galvanized	sS	772.1	469	SupplierStandard	8.8
01.B43VPP286G	28.6	1,960	Bright	zS	772.1	469	SupplierStandard	8.8
01.G43VPP286G	28.6	1,960	Galvanized	zS	772.1	469	SupplierStandard	8.8
01.B33VPP286G	28.6	1,960	Bright	sZ	772.1	469	SupplierStandard	8.8
01.G33VPP286G	28.6	1,960	Galvanized	sZ	772.1	469	SupplierStandard	8.8



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G38VPP286H	28.6	2,160	Galvanized	zZ	807.4	469	SupplierStandard	8.8
01.B38VPP286H	28.6	2,160	Bright	zZ	807.4	469	SupplierStandard	8.8
01.B48VPP286H	28.6	2,160	Bright	sS	807.4	469	SupplierStandard	8.8
01.G48VPP286H	28.6	2,160	Galvanized	sS	807.4	469	SupplierStandard	8.8
01.B43VPP286H	28.6	2,160	Bright	zS	807.4	469	SupplierStandard	8.8
01.G43VPP286H	28.6	2,160	Galvanized	zS	807.4	469	SupplierStandard	8.8
01.B33VPP286H	28.6	2,160	Bright	sZ	807.4	469	SupplierStandard	8.8
01.G33VPP286H	28.6	2,160	Galvanized	sZ	807.4	469	SupplierStandard	8.8
01.G38VPP290G	29	1,960	Galvanized	zZ	793.9	482	SupplierStandard	9.04
01.B38VPP290G	29	1,960	Bright	zZ	793.9	482	SupplierStandard	9.04
01.B48VPP290G	29	1,960	Bright	sS	793.9	482	SupplierStandard	9.04
01.G48VPP290G	29	1,960	Galvanized	sS	793.9	482	SupplierStandard	9.04
01.B43VPP290G	29	1,960	Bright	zS	793.9	482	SupplierStandard	9.04
01.G43VPP290G	29	1,960	Galvanized	zS	793.9	482	SupplierStandard	9.04
01.B33VPP290G	29	1,960	Bright	sZ	793.9	482	SupplierStandard	9.04
01.G33VPP290G	29	1,960	Galvanized	sZ	793.9	482	SupplierStandard	9.04
01.G38VPP290H	29	2,160	Galvanized	zZ	830.1	482	SupplierStandard	9.04
01.B38VPP290H	29	2,160	Bright	zZ	830.1	482	SupplierStandard	9.04
01.B48VPP290H	29	2,160	Bright	sS	830.1	482	SupplierStandard	9.04
01.G48VPP290H	29	2,160	Galvanized	sS	830.1	482	SupplierStandard	9.04
01.B43VPP290H	29	2,160	Bright	zS	830.1	482	SupplierStandard	9.04
01.G43VPP290H	29	2,160	Galvanized	zS	830.1	482	SupplierStandard	9.04
01.B33VPP290H	29	2,160	Bright	sZ	830.1	482	SupplierStandard	9.04
01.G33VPP290H	29	2,160	Galvanized	sZ	830.1	482	SupplierStandard	9.04
01.G38VPP300G	30	1,960	Galvanized	zZ	849.6	516	SupplierStandard	9.68
01.B38VPP300G	30	1,960	Bright	zZ	849.6	516	SupplierStandard	9.68
01.B48VPP300G	30	1,960	Bright	sS	849.6	516	SupplierStandard	9.68
01.G48VPP300G	30	1,960	Galvanized	sS	849.6	516	SupplierStandard	9.68
01.B43VPP300G	30	1,960	Bright	zS	849.6	516	SupplierStandard	9.68
01.G43VPP300G	30	1,960	Galvanized	zS	849.6	516	SupplierStandard	9.68
01.B33VPP300G	30	1,960	Bright	sZ	849.6	516	SupplierStandard	9.68



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G33VPP300G	30	1,960	Galvanized	sZ	849.6	516	SupplierStandard	9.68
01.G38VPP300H	30	2,160	Galvanized	zZ	888.4	516	SupplierStandard	9.68
01.B38VPP300H	30	2,160	Bright	zZ	888.4	516	SupplierStandard	9.68
01.B48VPP300H	30	2,160	Bright	sS	888.4	516	SupplierStandard	9.68
01.G48VPP300H	30	2,160	Galvanized	sS	888.4	516	SupplierStandard	9.68
01.B43VPP300H	30	2,160	Bright	zS	888.4	516	SupplierStandard	9.68
01.G43VPP300H	30	2,160	Galvanized	zS	888.4	516	SupplierStandard	9.68
01.B33VPP300H	30	2,160	Bright	sZ	888.4	516	SupplierStandard	9.68
01.G33VPP300H	30	2,160	Galvanized	sZ	888.4	516	SupplierStandard	9.68
01.G38VPP310G	31	1,960	Galvanized	zZ	907.1	551	SupplierStandard	10.32
01.B38VPP310G	31	1,960	Bright	zZ	907.1	551	SupplierStandard	10.32
01.B48VPP310G	31	1,960	Bright	sS	907.1	551	SupplierStandard	10.32
01.G48VPP310G	31	1,960	Galvanized	sS	907.1	551	SupplierStandard	10.32
01.B43VPP310G	31	1,960	Bright	zS	907.1	551	SupplierStandard	10.32
01.G43VPP310G	31	1,960	Galvanized	zS	907.1	551	SupplierStandard	10.32
01.B33VPP310G	31	1,960	Bright	sZ	907.1	551	SupplierStandard	10.32
01.G33VPP310G	31	1,960	Galvanized	sZ	907.1	551	SupplierStandard	10.32
01.G38VPP310H	31	2,160	Galvanized	zZ	948.6	551	SupplierStandard	10.32
01.B38VPP310H	31	2,160	Bright	zZ	948.6	551	SupplierStandard	10.32
01.B48VPP310H	31	2,160	Bright	sS	948.6	551	SupplierStandard	10.32
01.G48VPP310H	31	2,160	Galvanized	sS	948.6	551	SupplierStandard	10.32
01.B43VPP310H	31	2,160	Bright	zS	948.6	551	SupplierStandard	10.32
01.G43VPP310H	31	2,160	Galvanized	zS	948.6	551	SupplierStandard	10.32
01.B33VPP310H	31	2,160	Bright	sZ	948.6	551	SupplierStandard	10.32
01.G33VPP310H	31	2,160	Galvanized	sZ	948.6	551	SupplierStandard	10.32
01.G38VPP320G	32	1,960	Galvanized	zZ	966.6	587	SupplierStandard	11
01.B38VPP320G	32	1,960	Bright	zZ	966.6	587	SupplierStandard	11
01.B48VPP320G	32	1,960	Bright	sS	966.6	587	SupplierStandard	11
01.G48VPP320G	32	1,960	Galvanized	sS	966.6	587	SupplierStandard	11
01.B43VPP320G	32	1,960	Bright	zS	966.6	587	SupplierStandard	11
01.G43VPP320G	32	1,960	Galvanized	zS	966.6	587	SupplierStandard	11



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G38VPP320H	32	2,160	Galvanized	zZ	1,011	587	SupplierStandard	11
01.B38VPP320H	32	2,160	Bright	zZ	1,011	587	SupplierStandard	11
01.B48VPP320H	32	2,160	Bright	sS	1,011	587	SupplierStandard	11
01.G48VPP320H	32	2,160	Galvanized	sS	1,011	587	SupplierStandard	11
01.B43VPP320H	32	2,160	Bright	zS	1,011	587	SupplierStandard	11
01.G43VPP320H	32	2,160	Galvanized	zS	1,011	587	SupplierStandard	11
01.G38VPP330G	33	1,960	Galvanized	zZ	1,028	624	SupplierStandard	11.71
01.B38VPP330G	33	1,960	Bright	zZ	1,028	624	SupplierStandard	11.71
01.B48VPP330G	33	1,960	Bright	sS	1,028	624	SupplierStandard	11.71
01.G48VPP330G	33	1,960	Galvanized	sS	1,028	624	SupplierStandard	11.71
01.B43VPP330G	33	1,960	Bright	zS	1,028	624	SupplierStandard	11.71
01.G43VPP330G	33	1,960	Galvanized	zS	1,028	624	SupplierStandard	11.71
01.G38VPP330H	33	2,160	Galvanized	zZ	1,075	624	SupplierStandard	11.71
01.B38VPP330H	33	2,160	Bright	zZ	1,075	624	SupplierStandard	11.71
01.B48VPP330H	33	2,160	Bright	sS	1,075	624	SupplierStandard	11.71
01.G48VPP330H	33	2,160	Galvanized	sS	1,075	624	SupplierStandard	11.71
01.B43VPP330H	33	2,160	Bright	zS	1,075	624	SupplierStandard	11.71
01.G43VPP330H	33	2,160	Galvanized	zS	1,075	624	SupplierStandard	11.71
01.G38VPP340G	34	1,960	Galvanized	zZ	1,091	663	SupplierStandard	12.41
01.B38VPP340G	34	1,960	Bright	zZ	1,091	663	SupplierStandard	12.41
01.B48VPP340G	34	1,960	Bright	sS	1,091	663	SupplierStandard	12.41
01.G48VPP340G	34	1,960	Galvanized	sS	1,091	663	SupplierStandard	12.41
01.B43VPP340G	34	1,960	Bright	zS	1,091	663	SupplierStandard	12.41
01.G43VPP340G	34	1,960	Galvanized	zS	1,091	663	SupplierStandard	12.41
01.G38VPP340H	34	2,160	Galvanized	zZ	1,141	663	SupplierStandard	12.41
01.B38VPP340H	34	2,160	Bright	zZ	1,141	663	SupplierStandard	12.41
01.B48VPP340H	34	2,160	Bright	sS	1,141	663	SupplierStandard	12.41
01.G48VPP340H	34	2,160	Galvanized	sS	1,141	663	SupplierStandard	12.41
01.B43VPP340H	34	2,160	Bright	zS	1,141	663	SupplierStandard	12.41
01.G43VPP340H	34	2,160	Galvanized	zS	1,141	663	SupplierStandard	12.41
01.G38VPP350G	35	1,960	Galvanized	zZ	1,156	702	SupplierStandard	13.16



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B38VPP350G	35	1,960	Bright	zZ	1,156	702	SupplierStandard	13.16
01.B48VPP350G	35	1,960	Bright	sS	1,156	702	SupplierStandard	13.16
01.G48VPP350G	35	1,960	Galvanized	sS	1,156	702	SupplierStandard	13.16
01.B43VPP350G	35	1,960	Bright	zS	1,156	702	SupplierStandard	13.16
01.G43VPP350G	35	1,960	Galvanized	zS	1,156	702	SupplierStandard	13.16
01.G38VPP350H	35	2,160	Galvanized	zZ	1,209	702	SupplierStandard	13.16
01.B38VPP350H	35	2,160	Bright	zZ	1,209	702	SupplierStandard	13.16
01.B48VPP350H	35	2,160	Bright	sS	1,209	702	SupplierStandard	13.16
01.G48VPP350H	35	2,160	Galvanized	sS	1,209	702	SupplierStandard	13.16
01.B43VPP350H	35	2,160	Bright	zS	1,209	702	SupplierStandard	13.16
01.G43VPP350H	35	2,160	Galvanized	zS	1,209	702	SupplierStandard	13.16
01.G38VPP360G	36	1,960	Galvanized	zZ	1,223	743	SupplierStandard	13.93
01.B38VPP360G	36	1,960	Bright	zZ	1,223	743	SupplierStandard	13.93
01.B48VPP360G	36	1,960	Bright	sS	1,223	743	SupplierStandard	13.93
01.G48VPP360G	36	1,960	Galvanized	sS	1,223	743	SupplierStandard	13.93
01.B43VPP360G	36	1,960	Bright	zS	1,223	743	SupplierStandard	13.93
01.G43VPP360G	36	1,960	Galvanized	zS	1,223	743	SupplierStandard	13.93
01.G38VPP360H	36	2,160	Galvanized	zZ	1,279	743	SupplierStandard	13.93
01.B38VPP360H	36	2,160	Bright	zZ	1,279	743	SupplierStandard	13.93
01.B48VPP360H	36	2,160	Bright	sS	1,279	743	SupplierStandard	13.93
01.G48VPP360H	36	2,160	Galvanized	sS	1,279	743	SupplierStandard	13.93
01.B43VPP360H	36	2,160	Bright	zS	1,279	743	SupplierStandard	13.93
01.G43VPP360H	36	2,160	Galvanized	zS	1,279	743	SupplierStandard	13.93
01.G38VPP380G	38	1,960	Galvanized	zZ	1,363	828	SupplierStandard	15.52
01.B38VPP380G	38	1,960	Bright	zZ	1,363	828	SupplierStandard	15.52
01.B48VPP380G	38	1,960	Bright	sS	1,363	828	SupplierStandard	15.52
01.G48VPP380G	38	1,960	Galvanized	sS	1,363	828	SupplierStandard	15.52
01.B43VPP380G	38	1,960	Bright	zS	1,363	828	SupplierStandard	15.52
01.G43VPP380G	38	1,960	Galvanized	zS	1,363	828	SupplierStandard	15.52
01.G38VPP380H	38	2,160	Galvanized	zZ	1,425	828	SupplierStandard	15.52
01.B38VPP380H	38	2,160	Bright	zZ	1,425	828	SupplierStandard	15.52



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B48VPP380H	38	2,160	Bright	sS	1,425	828	SupplierStandard	15.52
01.G48VPP380H	38	2,160	Galvanized	sS	1,425	828	SupplierStandard	15.52
01.B43VPP380H	38	2,160	Bright	zS	1,425	828	SupplierStandard	15.52
01.G43VPP380H	38	2,160	Galvanized	zS	1,425	828	SupplierStandard	15.52
01.G38VPP400G	40	1,960	Galvanized	zZ	1,510	917	SupplierStandard	17.2
01.B38VPP400G	40	1,960	Bright	zZ	1,510	917	SupplierStandard	17.2
01.B48VPP400G	40	1,960	Bright	sS	1,510	917	SupplierStandard	17.2
01.G48VPP400G	40	1,960	Galvanized	sS	1,510	917	SupplierStandard	17.2
01.B43VPP400G	40	1,960	Bright	zS	1,510	917	SupplierStandard	17.2
01.G43VPP400G	40	1,960	Galvanized	zS	1,510	917	SupplierStandard	17.2
01.G38VPP400H	40	2,160	Galvanized	zZ	1,579	917	SupplierStandard	17.2
01.B38VPP400H	40	2,160	Bright	zZ	1,579	917	SupplierStandard	17.2
01.B48VPP400H	40	2,160	Bright	sS	1,579	917	SupplierStandard	17.2
01.G48VPP400H	40	2,160	Galvanized	sS	1,579	917	SupplierStandard	17.2
01.B43VPP400H	40	2,160	Bright	zS	1,579	917	SupplierStandard	17.2
01.G43VPP400H	40	2,160	Galvanized	zS	1,579	917	SupplierStandard	17.2
01.G38VPP420G	42	1,960	Galvanized	zZ	1,665	1,011	SupplierStandard	18.96
01.B38VPP420G	42	1,960	Bright	zZ	1,665	1,011	SupplierStandard	18.96
01.B48VPP420G	42	1,960	Bright	sS	1,665	1,011	SupplierStandard	18.96
01.G48VPP420G	42	1,960	Galvanized	sS	1,665	1,011	SupplierStandard	18.96
01.B43VPP420G	42	1,960	Bright	zS	1,665	1,011	SupplierStandard	18.96
01.G43VPP420G	42	1,960	Galvanized	zS	1,665	1,011	SupplierStandard	18.96
01.G38VPP420H	42	2,160	Galvanized	zZ	1,741	1,011	SupplierStandard	18.96
01.B38VPP420H	42	2,160	Bright	zZ	1,741	1,011	SupplierStandard	18.96
01.B48VPP420H	42	2,160	Bright	sS	1,741	1,011	SupplierStandard	18.96
01.G48VPP420H	42	2,160	Galvanized	sS	1,741	1,011	SupplierStandard	18.96
01.B43VPP420H	42	2,160	Bright	zS	1,741	1,011	SupplierStandard	18.96
01.G43VPP420H	42	2,160	Galvanized	zS	1,741	1,011	SupplierStandard	18.96
01.G38VPP430G	43	1,960	Galvanized	zZ	1,745	1,060	SupplierStandard	19.86
01.B38VPP430G	43	1,960	Bright	zZ	1,745	1,060	SupplierStandard	19.86
01.B48VPP430G	43	1,960	Bright	sS	1,745	1,060	SupplierStandard	19.86



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G48VPP430G	43	1,960	Galvanized	sS	1,745	1,060	SupplierStandard	19.86
01.B43VPP430G	43	1,960	Bright	zS	1,745	1,060	SupplierStandard	19.86
01.G43VPP430G	43	1,960	Galvanized	zS	1,745	1,060	SupplierStandard	19.86
01.G38VPP430H	43	2,160	Galvanized	zZ	1,825	1,060	SupplierStandard	19.86
01.B38VPP430H	43	2,160	Bright	zZ	1,825	1,060	SupplierStandard	19.86
01.B48VPP430H	43	2,160	Bright	sS	1,825	1,060	SupplierStandard	19.86
01.G48VPP430H	43	2,160	Galvanized	sS	1,825	1,060	SupplierStandard	19.86
01.B43VPP430H	43	2,160	Bright	zS	1,825	1,060	SupplierStandard	19.86
01.G43VPP430H	43	2,160	Galvanized	zS	1,825	1,060	SupplierStandard	19.86
01.G38VPP440G	44	1,960	Galvanized	zZ	1,827	1,110	SupplierStandard	20.81
01.B38VPP440G	44	1,960	Bright	zZ	1,827	1,110	SupplierStandard	20.81
01.B48VPP440G	44	1,960	Bright	sS	1,827	1,110	SupplierStandard	20.81
01.G48VPP440G	44	1,960	Galvanized	sS	1,827	1,110	SupplierStandard	20.81
01.B43VPP440G	44	1,960	Bright	zS	1,827	1,110	SupplierStandard	20.81
01.G43VPP440G	44	1,960	Galvanized	zS	1,827	1,110	SupplierStandard	20.81
01.G38VPP440H	44	2,160	Galvanized	zZ	1,911	1,110	SupplierStandard	20.81
01.B38VPP440H	44	2,160	Bright	zZ	1,911	1,110	SupplierStandard	20.81
01.B48VPP440H	44	2,160	Bright	sS	1,911	1,110	SupplierStandard	20.81
01.G48VPP440H	44	2,160	Galvanized	sS	1,911	1,110	SupplierStandard	20.81
01.B43VPP440H	44	2,160	Bright	zS	1,911	1,110	SupplierStandard	20.81
01.G43VPP440H	44	2,160	Galvanized	zS	1,911	1,110	SupplierStandard	20.81
01.G38VPP450G	45	1,960	Galvanized	zZ	1,911	1,161	SupplierStandard	21.76
01.B38VPP450G	45	1,960	Bright	zZ	1,911	1,161	SupplierStandard	21.76
01.B48VPP450G	45	1,960	Bright	sS	1,911	1,161	SupplierStandard	21.76
01.G48VPP450G	45	1,960	Galvanized	sS	1,911	1,161	SupplierStandard	21.76
01.B43VPP450G	45	1,960	Bright	zS	1,911	1,161	SupplierStandard	21.76
01.G43VPP450G	45	1,960	Galvanized	zS	1,911	1,161	SupplierStandard	21.76
01.G38VPP450H	45	2,160	Galvanized	zZ	1,999	1,161	SupplierStandard	21.76
01.B38VPP450H	45	2,160	Bright	zZ	1,999	1,161	SupplierStandard	21.76
01.B48VPP450H	45	2,160	Bright	sS	1,999	1,161	SupplierStandard	21.76
01.G48VPP450H	45	2,160	Galvanized	sS	1,999	1,161	SupplierStandard	21.76



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.B43VPP450H	45	2,160	Bright	zS	1,999	1,161	SupplierStandard	21.76
01.G43VPP450H	45	2,160	Galvanized	zS	1,999	1,161	SupplierStandard	21.76
01.G38VPP460G	46	1,960	Galvanized	zZ	1,997	1,213	SupplierStandard	22.73
01.B38VPP460G	46	1,960	Bright	zZ	1,997	1,213	SupplierStandard	22.73
01.B48VPP460G	46	1,960	Bright	sS	1,997	1,213	SupplierStandard	22.73
01.G48VPP460G	46	1,960	Galvanized	sS	1,997	1,213	SupplierStandard	22.73
01.B43VPP460G	46	1,960	Bright	zS	1,997	1,213	SupplierStandard	22.73
01.G43VPP460G	46	1,960	Galvanized	zS	1,997	1,213	SupplierStandard	22.73
01.G38VPP460H	46	2,160	Galvanized	zZ	2,089	1,213	SupplierStandard	22.73
01.B38VPP460H	46	2,160	Bright	zZ	2,089	1,213	SupplierStandard	22.73
01.B48VPP460H	46	2,160	Bright	sS	2,089	1,213	SupplierStandard	22.73
01.G48VPP460H	46	2,160	Galvanized	sS	2,089	1,213	SupplierStandard	22.73
01.B43VPP460H	46	2,160	Bright	zS	2,089	1,213	SupplierStandard	22.73
01.G43VPP460H	46	2,160	Galvanized	zS	2,089	1,213	SupplierStandard	22.73
01.G38VPP480G	48	1,960	Galvanized	zZ	2,175	1,321	SupplierStandard	24.76
01.B38VPP480G	48	1,960	Bright	zZ	2,175	1,321	SupplierStandard	24.76
01.B48VPP480G	48	1,960	Bright	sS	2,175	1,321	SupplierStandard	24.76
01.G48VPP480G	48	1,960	Galvanized	sS	2,175	1,321	SupplierStandard	24.76
01.B43VPP480G	48	1,960	Bright	zS	2,175	1,321	SupplierStandard	24.76
01.G43VPP480G	48	1,960	Galvanized	zS	2,175	1,321	SupplierStandard	24.76
01.G38VPP480H	48	2,160	Galvanized	zZ	2,274	1,321	SupplierStandard	24.76
01.B38VPP480H	48	2,160	Bright	zZ	2,274	1,321	SupplierStandard	24.76
01.B48VPP480H	48	2,160	Bright	sS	2,274	1,321	SupplierStandard	24.76
01.G48VPP480H	48	2,160	Galvanized	sS	2,274	1,321	SupplierStandard	24.76
01.B43VPP480H	48	2,160	Bright	zS	2,274	1,321	SupplierStandard	24.76
01.G43VPP480H	48	2,160	Galvanized	zS	2,274	1,321	SupplierStandard	24.76
01.G38VPP500G	50	1,960	Galvanized	zZ	2,360	1,433	SupplierStandard	26.85
01.B38VPP500G	50	1,960	Bright	zZ	2,360	1,433	SupplierStandard	26.85
01.B48VPP500G	50	1,960	Bright	sS	2,360	1,433	SupplierStandard	26.85
01.G48VPP500G	50	1,960	Galvanized	sS	2,360	1,433	SupplierStandard	26.85
01.B43VPP500G	50	1,960	Bright	zS	2,360	1,433	SupplierStandard	26.85



## Verope Steel Wire Rope Verotop P

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight lb
01.G43VPP500G	50	1,960	Galvanized	zS	2,360	1,433	SupplierStandard	26.85
01.G38VPP500H	50	2,160	Galvanized	zZ	2,468	1,433	SupplierStandard	26.85
01.B38VPP500H	50	2,160	Bright	zZ	2,468	1,433	SupplierStandard	26.85
01.B48VPP500H	50	2,160	Bright	sS	2,468	1,433	SupplierStandard	26.85
01.G48VPP500H	50	2,160	Galvanized	sS	2,468	1,433	SupplierStandard	26.85
01.B43VPP500H	50	2,160	Bright	zS	2,468	1,433	SupplierStandard	26.85
01.G43VPP500H	50	2,160	Galvanized	zS	2,468	1,433	SupplierStandard	26.85
01.G38VPP520G	52	1,960	Galvanized	zZ	2,552	1,550	SupplierStandard	29.06
01.B38VPP520G	52	1,960	Bright	zZ	2,552	1,550	SupplierStandard	29.06
01.B48VPP520G	52	1,960	Bright	sS	2,552	1,550	SupplierStandard	29.06
01.G48VPP520G	52	1,960	Galvanized	sS	2,552	1,550	SupplierStandard	29.06
01.B43VPP520G	52	1,960	Bright	zS	2,552	1,550	SupplierStandard	29.06
01.G43VPP520G	52	1,960	Galvanized	zS	2,552	1,550	SupplierStandard	29.06
01.G38VPP520H	52	2,160	Galvanized	zZ	2,669	1,550	SupplierStandard	29.06
01.B38VPP520H	52	2,160	Bright	zZ	2,669	1,550	SupplierStandard	29.06
01.B48VPP520H	52	2,160	Bright	sS	2,669	1,550	SupplierStandard	29.06
01.G48VPP520H	52	2,160	Galvanized	sS	2,669	1,550	SupplierStandard	29.06
01.B43VPP520H	52	2,160	Bright	zS	2,669	1,550	SupplierStandard	29.06
01.G43VPP520H	52	2,160	Galvanized	zS	2,669	1,550	SupplierStandard	29.06
01.G38VPP540G	54	1,960	Galvanized	zZ	2,753	1,671	SupplierStandard	31.33
01.B38VPP540G	54	1,960	Bright	zZ	2,753	1,671	SupplierStandard	31.33
01.B48VPP540G	54	1,960	Bright	sS	2,753	1,671	SupplierStandard	31.33
01.G48VPP540G	54	1,960	Galvanized	sS	2,753	1,671	SupplierStandard	31.33
01.B43VPP540G	54	1,960	Bright	zS	2,753	1,671	SupplierStandard	31.33
01.G43VPP540G	54	1,960	Galvanized	zS	2,753	1,671	SupplierStandard	31.33
01.G38VPP540H	54	2,160	Galvanized	zZ	2,878	1,671	SupplierStandard	31.33
01.B38VPP540H	54	2,160	Bright	zZ	2,878	1,671	SupplierStandard	31.33
01.B48VPP540H	54	2,160	Bright	sS	2,878	1,671	SupplierStandard	31.33
01.G48VPP540H	54	2,160	Galvanized	sS	2,878	1,671	SupplierStandard	31.33
01.B43VPP540H	54	2,160	Bright	zS	2,878	1,671	SupplierStandard	31.33
01.G43VPP540H	54	2,160	Galvanized	zS	2,878	1,671	SupplierStandard	31.33



# Verope Steel Wire Rope Verotop P

---