
LAM-É ST-PIERRE | Lifting Solutions Group
Axel Johnson International

# Verope Steel Wire Rope Verotop S

**Product information**



Mobile crane

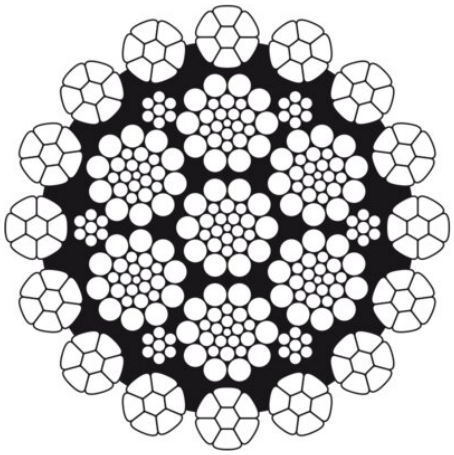

Piling crane



**Wire rope construction:** verotop S is a is a very flexible rotation-resistant rope with compacted outer strands and very high breaking strength.

**Features:**

- Very strong compacted rotation-resistant rope.
- Achieves very good bending fatigue results.
- Offers excellent resistance to crushing and abrassion.
- Possesses perfect spooling behavior on multilayer drum.

**ISO 4309 Rope Category No:** All Diameters **RCN.23-2.**

... *Read more*

**Marking:** According to standard
**Standard:** EN 12385-4
**Note:** verotop S can be used either with or without swivel.

**Fill factor:** 0.742
**RCN:** 23-2
**Tolerance Ø:** +2% to +4%

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.G37VPS130G | 13 | 1,960 | Galvanized | zZ | 166 | 98 | SupplierStandard | 1.87 |
| 01.G47VPS130G | 13 | 1,960 | Galvanized | sS | 166 | 98 | SupplierStandard | 1.87 |
| 01.B37VPS130G | 13 | 1,960 | Bright | zZ | 166 | 98 | SupplierStandard | 1.87 |
| 01.B47VPS130G | 13 | 1,960 | Bright | sS | 166 | 98 | SupplierStandard | 1.87 |
| 01.G37VPS130H | 13 | 2,160 | Galvanized | zZ | 172.8 | 98 | SupplierStandard | 1.87 |
| 01.G47VPS130H | 13 | 2,160 | Galvanized | sS | 172.8 | 98 | SupplierStandard | 1.87 |
| 01.B37VPS130H | 13 | 2,160 | Bright | zZ | 172.8 | 98 | SupplierStandard | 1.87 |
| 01.B47VPS130H | 13 | 2,160 | Bright | sS | 172.8 | 98 | SupplierStandard | 1.87 |
| 01.G37VPS140G | 14 | 1,960 | Galvanized | zZ | 192.5 | 114 | SupplierStandard | 2.16 |
| 01.G47VPS140G | 14 | 1,960 | Galvanized | sS | 192.5 | 114 | SupplierStandard | 2.16 |
| 01.B37VPS140G | 14 | 1,960 | Bright | zZ | 192.5 | 114 | SupplierStandard | 2.16 |
| 01.B47VPS140G | 14 | 1,960 | Bright | sS | 192.5 | 114 | SupplierStandard | 2.16 |
| 01.G37VPS140H | 14 | 2,160 | Galvanized | zZ | 200.4 | 114 | SupplierStandard | 2.16 |
| 01.G47VPS140H | 14 | 2,160 | Galvanized | sS | 200.4 | 114 | SupplierStandard | 2.16 |
| 01.B37VPS140H | 14 | 2,160 | Bright | zZ | 200.4 | 114 | SupplierStandard | 2.16 |
| 01.B47VPS140H | 14 | 2,160 | Bright | sS | 200.4 | 114 | SupplierStandard | 2.16 |
| 01.G37VPS150G | 15 | 1,960 | Galvanized | zZ | 221 | 131 | SupplierStandard | 2.49 |
| 01.G47VPS150G | 15 | 1,960 | Galvanized | sS | 221 | 131 | SupplierStandard | 2.49 |
| 01.B37VPS150G | 15 | 1,960 | Bright | zZ | 221 | 131 | SupplierStandard | 2.49 |
| 01.B47VPS150G | 15 | 1,960 | Bright | sS | 221 | 131 | SupplierStandard | 2.49 |
| 01.G37VPS150H | 15 | 2,160 | Galvanized | zZ | 230.1 | 131 | SupplierStandard | 2.49 |
| 01.G47VPS150H | 15 | 2,160 | Galvanized | sS | 230.1 | 131 | SupplierStandard | 2.49 |
| 01.B37VPS150H | 15 | 2,160 | Bright | zZ | 230.1 | 131 | SupplierStandard | 2.49 |
| 01.B47VPS150H | 15 | 2,160 | Bright | sS | 230.1 | 131 | SupplierStandard | 2.49 |
| 01.G37VPS160G | 16 | 1,960 | Galvanized | zZ | 251.4 | 150 | SupplierStandard | 2.82 |
| 01.G47VPS160G | 16 | 1,960 | Galvanized | sS | 251.4 | 150 | SupplierStandard | 2.82 |
| 01.B37VPS160G | 16 | 1,960 | Bright | zZ | 251.4 | 150 | SupplierStandard | 2.82 |
| 01.B47VPS160G | 16 | 1,960 | Bright | sS | 251.4 | 150 | SupplierStandard | 2.82 |
| 01.G37VPS160H | 16 | 2,160 | Galvanized | zZ | 261.8 | 150 | SupplierStandard | 2.82 |
| 01.G47VPS160H | 16 | 2,160 | Galvanized | sS | 261.8 | 150 | SupplierStandard | 2.82 |
| 01.B37VPS160H | 16 | 2,160 | Bright | zZ | 261.8 | 150 | SupplierStandard | 2.82 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.B47VPS160H | 16 | 2,160 | Bright | sS | 261.8 | 150 | SupplierStandard | 2.82 |
| 01.G37VPS170G | 17 | 1,960 | Galvanized | zZ | 283.8 | 169 | SupplierStandard | 3.2 |
| 01.G47VPS170G | 17 | 1,960 | Galvanized | sS | 283.8 | 169 | SupplierStandard | 3.2 |
| 01.B37VPS170G | 17 | 1,960 | Bright | zZ | 283.8 | 169 | SupplierStandard | 3.2 |
| 01.B47VPS170G | 17 | 1,960 | Bright | sS | 283.8 | 169 | SupplierStandard | 3.2 |
| 01.G37VPS170H | 17 | 2,160 | Galvanized | zZ | 295.5 | 169 | SupplierStandard | 3.2 |
| 01.G47VPS170H | 17 | 2,160 | Galvanized | sS | 295.5 | 169 | SupplierStandard | 3.2 |
| 01.B37VPS170H | 17 | 2,160 | Bright | zZ | 295.5 | 169 | SupplierStandard | 3.2 |
| 01.B47VPS170H | 17 | 2,160 | Bright | sS | 295.5 | 169 | SupplierStandard | 3.2 |
| 01.G37VPS180G | 18 | 1,960 | Galvanized | zZ | 318.2 | 190 | SupplierStandard | 3.57 |
| 01.G47VPS180G | 18 | 1,960 | Galvanized | sS | 318.2 | 190 | SupplierStandard | 3.57 |
| 01.B37VPS180G | 18 | 1,960 | Bright | zZ | 318.2 | 190 | SupplierStandard | 3.57 |
| 01.B47VPS180G | 18 | 1,960 | Bright | sS | 318.2 | 190 | SupplierStandard | 3.57 |
| 01.G37VPS180H | 18 | 2,160 | Galvanized | zZ | 331.3 | 190 | SupplierStandard | 3.57 |
| 01.G47VPS180H | 18 | 2,160 | Galvanized | sS | 331.3 | 190 | SupplierStandard | 3.57 |
| 01.B37VPS180H | 18 | 2,160 | Bright | zZ | 331.3 | 190 | SupplierStandard | 3.57 |
| 01.B47VPS180H | 18 | 2,160 | Bright | sS | 331.3 | 190 | SupplierStandard | 3.57 |
| 01.G37VPS190G | 19 | 1,960 | Galvanized | zZ | 354.5 | 212 | SupplierStandard | 3.99 |
| 01.G47VPS190G | 19 | 1,960 | Galvanized | sS | 354.5 | 212 | SupplierStandard | 3.99 |
| 01.B37VPS190G | 19 | 1,960 | Bright | zZ | 354.5 | 212 | SupplierStandard | 3.99 |
| 01.B47VPS190G | 19 | 1,960 | Bright | sS | 354.5 | 212 | SupplierStandard | 3.99 |
| 01.G37VPS190H | 19 | 2,160 | Galvanized | zZ | 369.2 | 212 | SupplierStandard | 3.99 |
| 01.G47VPS190H | 19 | 2,160 | Galvanized | sS | 369.2 | 212 | SupplierStandard | 3.99 |
| 01.B37VPS190H | 19 | 2,160 | Bright | zZ | 369.2 | 212 | SupplierStandard | 3.99 |
| 01.B47VPS190H | 19 | 2,160 | Bright | sS | 369.2 | 212 | SupplierStandard | 3.99 |
| 01.G37VPS200G | 20 | 1,960 | Galvanized | zZ | 392.8 | 235 | SupplierStandard | 4.41 |
| 01.G47VPS200G | 20 | 1,960 | Galvanized | sS | 392.8 | 235 | SupplierStandard | 4.41 |
| 01.B37VPS200G | 20 | 1,960 | Bright | zZ | 392.8 | 235 | SupplierStandard | 4.41 |
| 01.B47VPS200G | 20 | 1,960 | Bright | sS | 392.8 | 235 | SupplierStandard | 4.41 |
| 01.G37VPS200H | 20 | 2,160 | Galvanized | zZ | 409 | 235 | SupplierStandard | 4.41 |
| 01.G47VPS200H | 20 | 2,160 | Galvanized | sS | 409 | 235 | SupplierStandard | 4.41 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.B37VPS200H | 20 | 2,160 | Bright | zZ | 409 | 235 | SupplierStandard | 4.41 |
| 01.B47VPS200H | 20 | 2,160 | Bright | sS | 409 | 235 | SupplierStandard | 4.41 |
| 01.G37VPS210G | 21 | 1,960 | Galvanized | zZ | 433.1 | 260 | SupplierStandard | 4.87 |
| 01.G47VPS210G | 21 | 1,960 | Galvanized | sS | 433.1 | 260 | SupplierStandard | 4.87 |
| 01.B37VPS210G | 21 | 1,960 | Bright | zZ | 433.1 | 260 | SupplierStandard | 4.87 |
| 01.B47VPS210G | 21 | 1,960 | Bright | sS | 433.1 | 260 | SupplierStandard | 4.87 |
| 01.G37VPS210H | 21 | 2,160 | Galvanized | zZ | 451 | 260 | SupplierStandard | 4.87 |
| 01.G47VPS210H | 21 | 2,160 | Galvanized | sS | 451 | 260 | SupplierStandard | 4.87 |
| 01.B37VPS210H | 21 | 2,160 | Bright | zZ | 451 | 260 | SupplierStandard | 4.87 |
| 01.B47VPS210H | 21 | 2,160 | Bright | sS | 451 | 260 | SupplierStandard | 4.87 |
| 01.G37VPS220G | 22 | 1,960 | Galvanized | zZ | 475.3 | 285 | SupplierStandard | 5.36 |
| 01.G47VPS220G | 22 | 1,960 | Galvanized | sS | 475.3 | 285 | SupplierStandard | 5.36 |
| 01.B37VPS220G | 22 | 1,960 | Bright | zZ | 475.3 | 285 | SupplierStandard | 5.36 |
| 01.B47VPS220G | 22 | 1,960 | Bright | sS | 475.3 | 285 | SupplierStandard | 5.36 |
| 01.G37VPS220H | 22 | 2,160 | Galvanized | zZ | 494.9 | 285 | SupplierStandard | 5.36 |
| 01.G47VPS220H | 22 | 2,160 | Galvanized | sS | 494.9 | 285 | SupplierStandard | 5.36 |
| 01.B37VPS220H | 22 | 2,160 | Bright | zZ | 494.9 | 285 | SupplierStandard | 5.36 |
| 01.B47VPS220H | 22 | 2,160 | Bright | sS | 494.9 | 285 | SupplierStandard | 5.36 |
| 01.G37VPS224G | 22.4 | 1,960 | Galvanized | zZ | 492.8 | 290 | SupplierStandard | 5.53 |
| 01.G47VPS224G | 22.4 | 1,960 | Galvanized | sS | 492.8 | 290 | SupplierStandard | 5.53 |
| 01.B37VPS224G | 22.4 | 1,960 | Bright | zZ | 492.8 | 290 | SupplierStandard | 5.53 |
| 01.B47VPS224G | 22.4 | 1,960 | Bright | sS | 492.8 | 290 | SupplierStandard | 5.53 |
| 01.G37VPS224H | 22.4 | 2,160 | Galvanized | zZ | 513.1 | 290 | SupplierStandard | 5.53 |
| 01.G47VPS224H | 22.4 | 2,160 | Galvanized | sS | 513.1 | 290 | SupplierStandard | 5.53 |
| 01.B37VPS224H | 22.4 | 2,160 | Bright | zZ | 513.1 | 290 | SupplierStandard | 5.53 |
| 01.B47VPS224H | 22.4 | 2,160 | Bright | sS | 513.1 | 290 | SupplierStandard | 5.53 |
| 01.G37VPS230G | 23 | 1,960 | Galvanized | zZ | 519.5 | 312 | SupplierStandard | 5.84 |
| 01.G47VPS230G | 23 | 1,960 | Galvanized | sS | 519.5 | 312 | SupplierStandard | 5.84 |
| 01.B37VPS230G | 23 | 1,960 | Bright | zZ | 519.5 | 312 | SupplierStandard | 5.84 |
| 01.B47VPS230G | 23 | 1,960 | Bright | sS | 519.5 | 312 | SupplierStandard | 5.84 |
| 01.G37VPS230H | 23 | 2,160 | Galvanized | zZ | 541 | 312 | SupplierStandard | 5.84 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.G47VPS230H | 23 | 2,160 | Galvanized | sS | 541 | 312 | SupplierStandard | 5.84 |
| 01.B37VPS230H | 23 | 2,160 | Bright | zZ | 541 | 312 | SupplierStandard | 5.84 |
| 01.B47VPS230H | 23 | 2,160 | Bright | sS | 541 | 312 | SupplierStandard | 5.84 |
| 01.G37VPS240G | 24 | 1,960 | Galvanized | zZ | 565.7 | 340 | SupplierStandard | 6.37 |
| 01.G47VPS240G | 24 | 1,960 | Galvanized | sS | 565.7 | 340 | SupplierStandard | 6.37 |
| 01.B37VPS240G | 24 | 1,960 | Bright | zZ | 565.7 | 340 | SupplierStandard | 6.37 |
| 01.B47VPS240G | 24 | 1,960 | Bright | sS | 565.7 | 340 | SupplierStandard | 6.37 |
| 01.G37VPS240H | 24 | 2,160 | Galvanized | zZ | 589 | 340 | SupplierStandard | 6.37 |
| 01.G47VPS240H | 24 | 2,160 | Galvanized | sS | 589 | 340 | SupplierStandard | 6.37 |
| 01.B37VPS240H | 24 | 2,160 | Bright | zZ | 589 | 340 | SupplierStandard | 6.37 |
| 01.B47VPS240H | 24 | 2,160 | Bright | sS | 589 | 340 | SupplierStandard | 6.37 |
| 01.G37VPS250G | 25 | 1,960 | Galvanized | zZ | 613.8 | 369 | SupplierStandard | 6.9 |
| 01.G47VPS250G | 25 | 1,960 | Galvanized | sS | 613.8 | 369 | SupplierStandard | 6.9 |
| 01.B37VPS250G | 25 | 1,960 | Bright | zZ | 613.8 | 369 | SupplierStandard | 6.9 |
| 01.B47VPS250G | 25 | 1,960 | Bright | sS | 613.8 | 369 | SupplierStandard | 6.9 |
| 01.G37VPS250H | 25 | 2,160 | Galvanized | zZ | 639.1 | 369 | SupplierStandard | 6.9 |
| 01.G47VPS250H | 25 | 2,160 | Galvanized | sS | 639.1 | 369 | SupplierStandard | 6.9 |
| 01.B37VPS250H | 25 | 2,160 | Bright | zZ | 639.1 | 369 | SupplierStandard | 6.9 |
| 01.B47VPS250H | 25 | 2,160 | Bright | sS | 639.1 | 369 | SupplierStandard | 6.9 |
| 01.G37VPS254G | 25.4 | 1,960 | Galvanized | zZ | 633.6 | 381 | SupplierStandard | 7.12 |
| 01.G47VPS254G | 25.4 | 1,960 | Galvanized | sS | 633.6 | 381 | SupplierStandard | 7.12 |
| 01.B37VPS254G | 25.4 | 1,960 | Bright | zZ | 633.6 | 381 | SupplierStandard | 7.12 |
| 01.B47VPS254G | 25.4 | 1,960 | Bright | sS | 633.6 | 381 | SupplierStandard | 7.12 |
| 01.G37VPS254H | 25.4 | 2,160 | Galvanized | zZ | 659.7 | 381 | SupplierStandard | 7.12 |
| 01.G47VPS254H | 25.4 | 2,160 | Galvanized | sS | 659.7 | 381 | SupplierStandard | 7.12 |
| 01.B37VPS254H | 25.4 | 2,160 | Bright | zZ | 659.7 | 381 | SupplierStandard | 7.12 |
| 01.B47VPS254H | 25.4 | 2,160 | Bright | sS | 659.7 | 381 | SupplierStandard | 7.12 |
| 01.G37VPS260G | 26 | 1,960 | Galvanized | zZ | 663.9 | 399 | SupplierStandard | 7.47 |
| 01.G47VPS260G | 26 | 1,960 | Galvanized | sS | 663.9 | 399 | SupplierStandard | 7.47 |
| 01.B37VPS260G | 26 | 1,960 | Bright | zZ | 663.9 | 399 | SupplierStandard | 7.47 |
| 01.B47VPS260G | 26 | 1,960 | Bright | sS | 663.9 | 399 | SupplierStandard | 7.47 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.G37VPS260H | 26 | 2,160 | Galvanized | zZ | 691.3 | 399 | SupplierStandard | 7.47 |
| 01.G47VPS260H | 26 | 2,160 | Galvanized | sS | 691.3 | 399 | SupplierStandard | 7.47 |
| 01.B37VPS260H | 26 | 2,160 | Bright | zZ | 691.3 | 399 | SupplierStandard | 7.47 |
| 01.B47VPS260H | 26 | 2,160 | Bright | sS | 691.3 | 399 | SupplierStandard | 7.47 |
| 01.G37VPS270G | 27 | 1,960 | Galvanized | zZ | 715.9 | 430 | SupplierStandard | 8.05 |
| 01.G47VPS270G | 27 | 1,960 | Galvanized | sS | 715.9 | 430 | SupplierStandard | 8.05 |
| 01.B37VPS270G | 27 | 1,960 | Bright | zZ | 715.9 | 430 | SupplierStandard | 8.05 |
| 01.B47VPS270G | 27 | 1,960 | Bright | sS | 715.9 | 430 | SupplierStandard | 8.05 |
| 01.G37VPS270H | 27 | 2,160 | Galvanized | zZ | 745.5 | 430 | SupplierStandard | 8.05 |
| 01.G47VPS270H | 27 | 2,160 | Galvanized | sS | 745.5 | 430 | SupplierStandard | 8.05 |
| 01.B37VPS270H | 27 | 2,160 | Bright | zZ | 745.5 | 430 | SupplierStandard | 8.05 |
| 01.B47VPS270H | 27 | 2,160 | Bright | sS | 745.5 | 430 | SupplierStandard | 8.05 |
| 01.G37VPS280G | 28 | 1,960 | Galvanized | zZ | 770 | 463 | SupplierStandard | 8.66 |
| 01.G47VPS280G | 28 | 1,960 | Galvanized | sS | 770 | 463 | SupplierStandard | 8.66 |
| 01.B37VPS280G | 28 | 1,960 | Bright | zZ | 770 | 463 | SupplierStandard | 8.66 |
| 01.B47VPS280G | 28 | 1,960 | Bright | sS | 770 | 463 | SupplierStandard | 8.66 |
| 01.G37VPS280H | 28 | 2,160 | Galvanized | zZ | 801.7 | 463 | SupplierStandard | 8.66 |
| 01.G47VPS280H | 28 | 2,160 | Galvanized | sS | 801.7 | 463 | SupplierStandard | 8.66 |
| 01.B37VPS280H | 28 | 2,160 | Bright | zZ | 801.7 | 463 | SupplierStandard | 8.66 |
| 01.B47VPS280H | 28 | 2,160 | Bright | sS | 801.7 | 463 | SupplierStandard | 8.66 |
| 01.G37VPS286G | 28.6 | 1,960 | Galvanized | zZ | 803.3 | 483 | SupplierStandard | 9.04 |
| 01.G47VPS286G | 28.6 | 1,960 | Galvanized | sS | 803.3 | 483 | SupplierStandard | 9.04 |
| 01.B37VPS286G | 28.6 | 1,960 | Bright | zZ | 803.3 | 483 | SupplierStandard | 9.04 |
| 01.B47VPS286G | 28.6 | 1,960 | Bright | sS | 803.3 | 483 | SupplierStandard | 9.04 |
| 01.G37VPS286H | 28.6 | 2,160 | Galvanized | zZ | 836.5 | 483 | SupplierStandard | 9.04 |
| 01.G47VPS286H | 28.6 | 2,160 | Galvanized | sS | 836.5 | 483 | SupplierStandard | 9.04 |
| 01.B37VPS286H | 28.6 | 2,160 | Bright | zZ | 836.5 | 483 | SupplierStandard | 9.04 |
| 01.B47VPS286H | 28.6 | 2,160 | Bright | sS | 836.5 | 483 | SupplierStandard | 9.04 |
| 01.G37VPS290G | 29 | 1,960 | Galvanized | zZ | 825.9 | 497 | SupplierStandard | 9.28 |
| 01.G47VPS290G | 29 | 1,960 | Galvanized | sS | 825.9 | 497 | SupplierStandard | 9.28 |
| 01.B37VPS290G | 29 | 1,960 | Bright | zZ | 825.9 | 497 | SupplierStandard | 9.28 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.B47VPS290G | 29 | 1,960 | Bright | sS | 825.9 | 497 | SupplierStandard | 9.28 |
| 01.G37VPS290H | 29 | 2,160 | Galvanized | zZ | 860 | 497 | SupplierStandard | 9.28 |
| 01.G47VPS290H | 29 | 2,160 | Galvanized | sS | 860 | 497 | SupplierStandard | 9.28 |
| 01.B37VPS290H | 29 | 2,160 | Bright | zZ | 860 | 497 | SupplierStandard | 9.28 |
| 01.B47VPS290H | 29 | 2,160 | Bright | sS | 860 | 497 | SupplierStandard | 9.28 |
| 01.G37VPS300G | 30 | 1,960 | Galvanized | zZ | 883.9 | 532 | SupplierStandard | 9.94 |
| 01.G47VPS300G | 30 | 1,960 | Galvanized | sS | 883.9 | 532 | SupplierStandard | 9.94 |
| 01.B37VPS300G | 30 | 1,960 | Bright | zZ | 883.9 | 532 | SupplierStandard | 9.94 |
| 01.B47VPS300G | 30 | 1,960 | Bright | sS | 883.9 | 532 | SupplierStandard | 9.94 |
| 01.G37VPS300H | 30 | 2,160 | Galvanized | zZ | 920.4 | 532 | SupplierStandard | 9.94 |
| 01.G47VPS300H | 30 | 2,160 | Galvanized | sS | 920.4 | 532 | SupplierStandard | 9.94 |
| 01.B37VPS300H | 30 | 2,160 | Bright | zZ | 920.4 | 532 | SupplierStandard | 9.94 |
| 01.B47VPS300H | 30 | 2,160 | Bright | sS | 920.4 | 532 | SupplierStandard | 9.94 |
| 01.G37VPS310G | 31 | 1,960 | Galvanized | zZ | 943.8 | 568 | SupplierStandard | 10.63 |
| 01.G47VPS310G | 31 | 1,960 | Galvanized | sS | 943.8 | 568 | SupplierStandard | 10.63 |
| 01.B37VPS310G | 31 | 1,960 | Bright | zZ | 943.8 | 568 | SupplierStandard | 10.63 |
| 01.B47VPS310G | 31 | 1,960 | Bright | sS | 943.8 | 568 | SupplierStandard | 10.63 |
| 01.G37VPS310H | 31 | 2,160 | Galvanized | zZ | 982.7 | 568 | SupplierStandard | 10.63 |
| 01.G47VPS310H | 31 | 2,160 | Galvanized | sS | 982.7 | 568 | SupplierStandard | 10.63 |
| 01.B37VPS310H | 31 | 2,160 | Bright | zZ | 982.7 | 568 | SupplierStandard | 10.63 |
| 01.B47VPS310H | 31 | 2,160 | Bright | sS | 982.7 | 568 | SupplierStandard | 10.63 |
| 01.G37VPS320G | 32 | 1,960 | Galvanized | zZ | 1,005 | 597 | SupplierStandard | 11.31 |
| 01.G47VPS320G | 32 | 1,960 | Galvanized | sS | 1,005 | 597 | SupplierStandard | 11.31 |
| 01.B37VPS320G | 32 | 1,960 | Bright | zZ | 1,005 | 597 | SupplierStandard | 11.31 |
| 01.B47VPS320G | 32 | 1,960 | Bright | sS | 1,005 | 597 | SupplierStandard | 11.31 |
| 01.G37VPS320H | 32 | 2,160 | Galvanized | zZ | 1,047 | 597 | SupplierStandard | 11.31 |
| 01.G47VPS320H | 32 | 2,160 | Galvanized | sS | 1,047 | 597 | SupplierStandard | 11.31 |
| 01.B37VPS320H | 32 | 2,160 | Bright | zZ | 1,047 | 597 | SupplierStandard | 11.31 |
| 01.B47VPS320H | 32 | 2,160 | Bright | sS | 1,047 | 597 | SupplierStandard | 11.31 |
| 01.G37VPS330G | 33 | 1,960 | Galvanized | zZ | 1,069 | 635 | SupplierStandard | 12.03 |
| 01.G47VPS330G | 33 | 1,960 | Galvanized | sS | 1,069 | 635 | SupplierStandard | 12.03 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.B37VPS330G | 33 | 1,960 | Bright | zZ | 1,069 | 635 | SupplierStandard | 12.03 |
| 01.B47VPS330G | 33 | 1,960 | Bright | sS | 1,069 | 635 | SupplierStandard | 12.03 |
| 01.G37VPS330H | 33 | 2,160 | Galvanized | zZ | 1,114 | 635 | SupplierStandard | 12.03 |
| 01.G47VPS330H | 33 | 2,160 | Galvanized | sS | 1,114 | 635 | SupplierStandard | 12.03 |
| 01.B37VPS330H | 33 | 2,160 | Bright | zZ | 1,114 | 635 | SupplierStandard | 12.03 |
| 01.B47VPS330H | 33 | 2,160 | Bright | sS | 1,114 | 635 | SupplierStandard | 12.03 |
| 01.G37VPS340G | 34 | 1,960 | Galvanized | zZ | 1,135 | 674 | SupplierStandard | 12.77 |
| 01.G47VPS340G | 34 | 1,960 | Galvanized | sS | 1,135 | 674 | SupplierStandard | 12.77 |
| 01.B37VPS340G | 34 | 1,960 | Bright | zZ | 1,135 | 674 | SupplierStandard | 12.77 |
| 01.B47VPS340G | 34 | 1,960 | Bright | sS | 1,135 | 674 | SupplierStandard | 12.77 |
| 01.G37VPS340H | 34 | 2,160 | Galvanized | zZ | 1,182 | 674 | SupplierStandard | 12.77 |
| 01.G47VPS340H | 34 | 2,160 | Galvanized | sS | 1,182 | 674 | SupplierStandard | 12.77 |
| 01.B37VPS340H | 34 | 2,160 | Bright | zZ | 1,182 | 674 | SupplierStandard | 12.77 |
| 01.B47VPS340H | 34 | 2,160 | Bright | sS | 1,182 | 674 | SupplierStandard | 12.77 |
| 01.G37VPS350G | 35 | 1,960 | Galvanized | zZ | 1,203 | 714 | SupplierStandard | 13.53 |
| 01.G47VPS350G | 35 | 1,960 | Galvanized | sS | 1,203 | 714 | SupplierStandard | 13.53 |
| 01.B37VPS350G | 35 | 1,960 | Bright | zZ | 1,203 | 714 | SupplierStandard | 13.53 |
| 01.B47VPS350G | 35 | 1,960 | Bright | sS | 1,203 | 714 | SupplierStandard | 13.53 |
| 01.G37VPS350H | 35 | 2,160 | Galvanized | zZ | 1,253 | 714 | SupplierStandard | 13.53 |
| 01.G47VPS350H | 35 | 2,160 | Galvanized | sS | 1,253 | 714 | SupplierStandard | 13.53 |
| 01.B37VPS350H | 35 | 2,160 | Bright | zZ | 1,253 | 714 | SupplierStandard | 13.53 |
| 01.B47VPS350H | 35 | 2,160 | Bright | sS | 1,253 | 714 | SupplierStandard | 13.53 |
| 01.G37VPS360G | 36 | 1,960 | Galvanized | zZ | 1,273 | 755 | SupplierStandard | 14.32 |
| 01.G47VPS360G | 36 | 1,960 | Galvanized | sS | 1,273 | 755 | SupplierStandard | 14.32 |
| 01.B37VPS360G | 36 | 1,960 | Bright | zZ | 1,273 | 755 | SupplierStandard | 14.32 |
| 01.B47VPS360G | 36 | 1,960 | Bright | sS | 1,273 | 755 | SupplierStandard | 14.32 |
| 01.G37VPS360H | 36 | 2,160 | Galvanized | zZ | 1,325 | 755 | SupplierStandard | 14.32 |
| 01.G47VPS360H | 36 | 2,160 | Galvanized | sS | 1,325 | 755 | SupplierStandard | 14.32 |
| 01.B37VPS360H | 36 | 2,160 | Bright | zZ | 1,325 | 755 | SupplierStandard | 14.32 |
| 01.B47VPS360H | 36 | 2,160 | Bright | sS | 1,325 | 755 | SupplierStandard | 14.32 |
| 01.G37VPS380G | 38 | 1,960 | Galvanized | zZ | 1,418 | 841 | SupplierStandard | 15.95 |

© November 2026 - All Rights Reserved

# Verope Steel Wire Rope Verotop S

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight lb |
|---|---|---|---|---|---|---|---|---|
| 01.G47VPS380G | 38 | 1,960 | Galvanized | sS | 1,418 | 841 | SupplierStandard | 15.95 |
| 01.B37VPS380G | 38 | 1,960 | Bright | zZ | 1,418 | 841 | SupplierStandard | 15.95 |
| 01.B47VPS380G | 38 | 1,960 | Bright | sS | 1,418 | 841 | SupplierStandard | 15.95 |
| 01.G37VPS380H | 38 | 2,160 | Galvanized | zZ | 1,477 | 841 | SupplierStandard | 15.95 |
| 01.G47VPS380H | 38 | 2,160 | Galvanized | sS | 1,477 | 841 | SupplierStandard | 15.95 |
| 01.B37VPS380H | 38 | 2,160 | Bright | zZ | 1,477 | 841 | SupplierStandard | 15.95 |
| 01.B47VPS380H | 38 | 2,160 | Bright | sS | 1,477 | 841 | SupplierStandard | 15.95 |
| 01.G37VPS400G | 40 | 1,960 | Galvanized | zZ | 1,571 | 932 | SupplierStandard | 17.67 |
| 01.G47VPS400G | 40 | 1,960 | Galvanized | sS | 1,571 | 932 | SupplierStandard | 17.67 |
| 01.B37VPS400G | 40 | 1,960 | Bright | zZ | 1,571 | 932 | SupplierStandard | 17.67 |
| 01.B47VPS400G | 40 | 1,960 | Bright | sS | 1,571 | 932 | SupplierStandard | 17.67 |
| 01.G37VPS400H | 40 | 2,160 | Galvanized | zZ | 1,636 | 932 | SupplierStandard | 17.67 |
| 01.G47VPS400H | 40 | 2,160 | Galvanized | sS | 1,636 | 932 | SupplierStandard | 17.67 |
| 01.B37VPS400H | 40 | 2,160 | Bright | zZ | 1,636 | 932 | SupplierStandard | 17.67 |
| 01.B47VPS400H | 40 | 2,160 | Bright | sS | 1,636 | 932 | SupplierStandard | 17.67 |

© November 2026 - All Rights Reserved