




**LAM-É  
ST-PIERRE**



## SCREW PIN ANCHOR SHACKLE G209 B30/LSP

### FEATURES

- Titian™ screw pin anchor shackles
- Working load limit and size are permanently forged onto every shackle
- Capacities 1/3 through 55 metric tons
- Meet or exceed all requirements of ASME B30.26
- Safety factor: 6:1
- Traceability batch code and the manufacturer traceability code are forged onto each shackle and pin
- Proof testing certificate available
- Forged-Quenched and tempered with alloy pins
- Hot dip galvanized

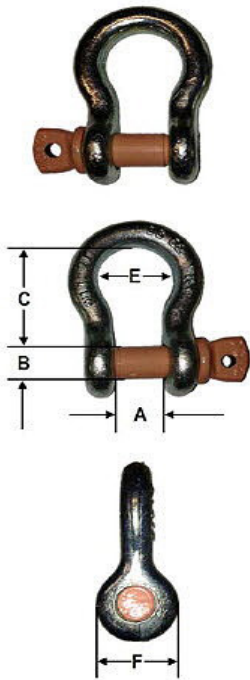

NOMINAL SIZE (IN.)	WLL (T.M.)	STOCK NO.	UPC NO.	WEIGHT (LBS.)	DIMENSIONS (IN.)				
					A	B	C	E	F
3/16	1/3	G2093/16B30-5P	5SPASHDG	0.06	0.38	0.25	0.88	0.60	0.56
1/4	1/2	G2091/4B30-5P	6SPASHDG	0.10	0.47	0.31	1.10	0.78	0.61
5/16	3/4	G2095/16B30-5P	8SPASHDG	0.17	0.53	0.38	1.19	0.84	0.75
3/8	1	G2093/8B30-5P	10SPASHDG	0.29	0.66	0.44	1.41	1.03	0.91
7/16	1-1/2	G2097/16B30-5P	11SPASHDG	0.44	0.75	0.50	1.66	1.16	1.06
1/2	2	G2091/2B30-5P	13SPASHDG	0.67	0.81	0.63	1.86	1.30	1.19
5/8	3-1/4	G2095/8B30-5P	16SPASHDG	1.32	1.06	0.75	2.36	1.65	1.54
3/4	4-3/4	G2093/4B30-5P	20SPASHDG	2.25	1.25	0.88	2.80	2.01	1.85
7/8	6-1/2	G2097/8B30-5P	22SPASHDG	3.48	1.44	1.00	3.31	2.28	2.13
1	8-1/2	G2091B30-5P	26SPASHDG	5.03	1.69	1.13	3.74	2.68	2.36
1-1/8	9-1/2	G20911/8B30-5P	29SPASHDG	6.42	1.81	1.25	4.25	2.91	2.60
1-1/4	12	G20911/4B30-5P	32SPASHDG	9.66	2.03	1.38	4.69	3.23	2.99
1-3/8	13-1/2	G20913/8B30-5P	36SPASHDG	12.87	2.24	1.50	5.16	3.50	3.31
1-1/2	17	G20911/2B30-5P	39SPASHDG	16.73	2.38	1.63	5.83	3.86	3.62
1-3/4	25	G20913/4B30-5P	46SPASHDG	28.13	2.87	2.00	6.97	5.00	4.29
2	35	G2092B30-5P	51SPASHDG	39.66	3.25	2.25	7.76	5.75	5.00
2-1/2	55	G20921/2B30-5P	64SPASHDG	83.77	4.09	2.75	10.51	7.24	5.91

**Note: Minimum Ultimate Strength is 6 times the Working Load Limit.**



[www.lamestierre.com](http://www.lamestierre.com)

Montréal | T 514 354-4219 / 1 800 361-4019  
 Québec | T 418 652-9759 / 1 800 652-9759  
 Saguenay | T 418 696-9759 / 1 866 696 9759