LAM-É ST-PIERRE | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope 6x26-IWRC

Product information

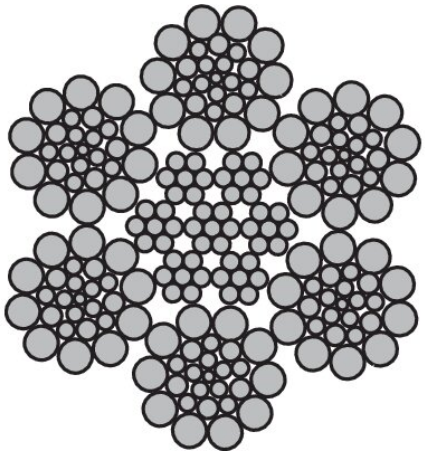

Typical applications: Winches, cranes.

ISO 4309 Rope Category No: All Diameters **RCN.06**

... *Read more*

Rope construction: 6x26-IWRC
Marking: According to standard
Finish: Bright.
Standard: EN 12385-4

Fill factor: 0.58
RCN: 06

© November 2026 - All Rights Reserved

LAM-É ST-PIERRE | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope 6x26-IWRC

Technical data

Rope diameter mm	Rope diameter inch	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight lb
6.4	1/4	1,960	Bright	sZ	30.24	A-2	-
11.1	7/16	1,960	Galvanized	sZ	81.66	Dry	-
12.7	1/2	1,960	Bright	sZ	118.32	A-2	-
15.9	5/8	1,960	Bright	sZ	183.26	A-2	-
19	3/4	1,960	Galvanized	sZ	235.75	Dry	-
19	3/4	1,960	Bright	sZ	261.55	A-2	-
22.2	7/8	1,960	Bright	sZ	354.07	A-2	-
25.4	1	1,960	Bright	sZ	459.94	A-2	-
41.3	-	1,960	Bright	sZ	145	SupplierStandard	17.42

© November 2026 - All Rights Reserved